

VBLDL-122



Applications:

- Replaces 50W Halogen Downlight
- Fits 98mm hole
- Hotels
- Residential

Features:

- Efficient and energy saving with an energy saving of 60%
- **Dimmable with most HPM / CLIPSAL leading or trailing edge dimmers (40% ~ 100%)**
- Lifetime of 35,000 hours
- Quick start and no flicker
- Environmentally friendly with no mercury, lead or other dangerous substances, no infrared or ultra-violet rays
- Built in driver
- Available in White or Brushed Chrome




Specifications:


Model Number	VBLDL-122-1-30	VBLDL-122-1-50	VBLDL-122-2-30	VBLDL-122-2-50
Power Consumption	12W	12W	12W	12W
Input Voltage	240VAC	240VAC	240VAC	240VAC
Input Current	0.054A	0.054A	0.054A	0.054A
HZ	50	50	50	50
LED Source	SAMSUNG 5630	SAMSUNG 5630	SAMSUNG 5630	SAMSUNG 5630
LEDs	24	24	24	24
Colour Temperature	3000K	5000K	3000K	5000K
Lumens Output	810lm	840lm	810lm	840lm
Luminaire Efficacy	67.5lm/W	70lm/W	67.5lm/W	70lm/W
CRI	80-85	80-85	80-85	80-85
Power Factor	>0.9	>0.9	>0.9	>0.9
Beam Angle	120°	120°	120°	120°
Lamp Life	35,000 hours	35,000 hours	35,000 hours	35,000 hours
Dimmable	LE or TE dimmer	LE or TE dimmer	LE or TE dimmer	LE or TE dimmer
Dimension	Ø120 x 52mm	Ø120 x 52mm	Ø120 x 52mm	Ø120 x 52mm
Cutout	Ø98mm	Ø98mm	Ø98mm	Ø98mm
Fitting Colour	White	White	Brushed Chrome	Brushed Chrome
Weight per Item	355g	355g	355g	355g
Safety Certificates	ENEC, SAA, EMC, RCM 5614	ENEC, SAA, EMC, RCM 5614	ENEC, SAA, EMC, RCM 5614	ENEC, SAA, EMC, RCM 5614
Warranty	3 years	3 years	3 years	3 years
Replacement	50W Halogen Downlight	50W Halogen Downlight	50W Halogen Downlight	50W Halogen Downlight

Caution:

1. Not suitable for use in high temperature or moist areas
2. Not suitable for heavily air-polluted areas
3. Not suitable for close system fixtures

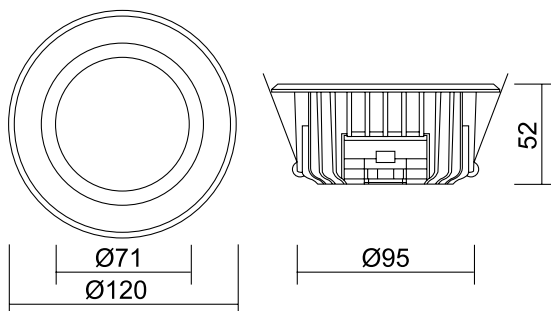

3000K

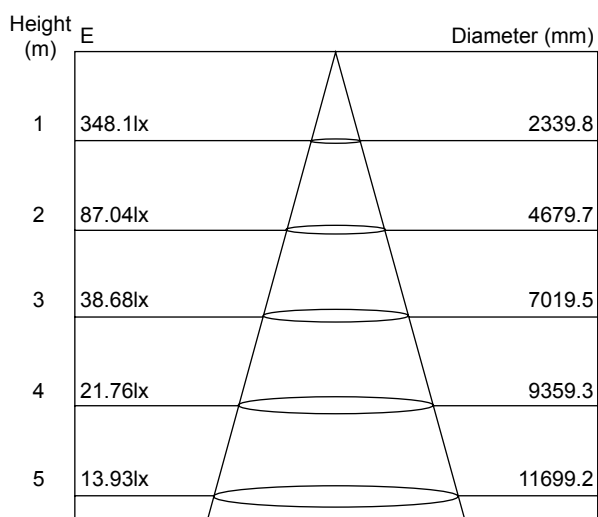

5000K

