




VBLFS-228-1-40 & VBLFS-414-1-40

Applications:

- Office
- Meeting room
- Break room
- Training Room
- Supermarkets
- Hospital
- School

Features:

- SAMSUNG LED CHIP
- SAA Approved Driver
- Replace traditional 4x14w & 2x28w T5 fluorescent fixture
- The OLC (omni-directional luminance control) provides excellent lighting without glare.
- Easy installation and maintenance

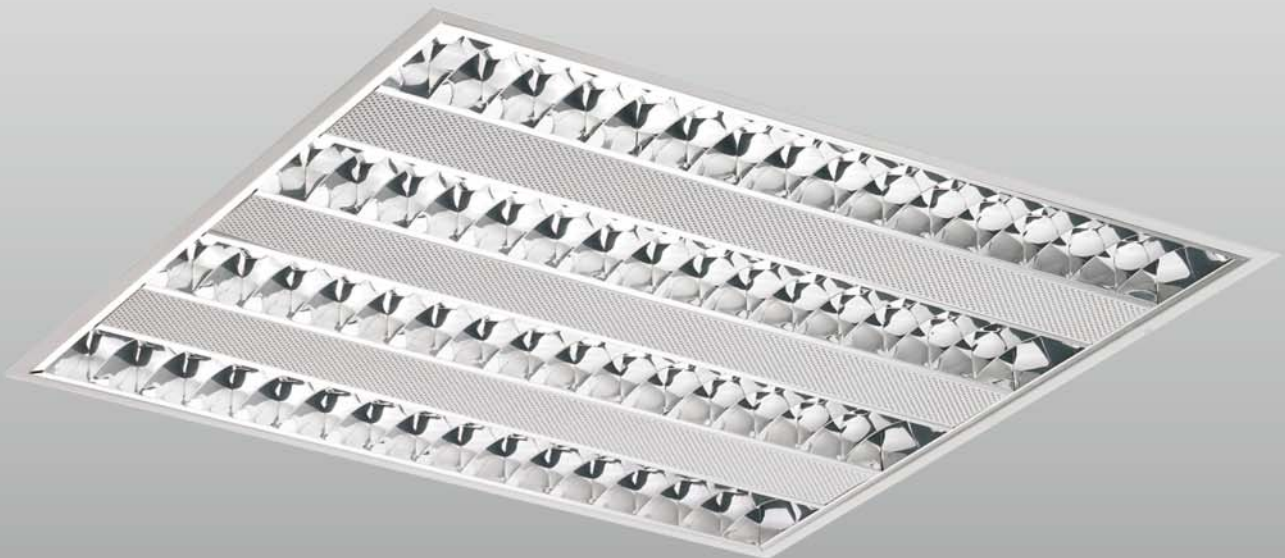


LED Light Fixture

Includes driver and 1.2m SAA approved flex and plug





Model Number	VBLFS-228-1-40	VBLFS-414-1-40
Power Consumption	40W	40W
Input Voltage	220~240V	220~240V
Constant Current	700mA	700mA
Hz	50-60Hz	50-60Hz
LED Source	Samsung	Samsung
Colour Temperature	4000K	4000K
Lumens Output	2703.80LM	2800.60LM
Luminaire Efficacy	71.64LM/W	73.61LM/W
CRI	85	85
Beam Angle	83.4 deg	86 deg
Lamp Life	30,000H	30,000H
Dimmable	Yes	Yes
Dimension	1195*295*55mm	595*595*55mm
Cutout	1178*278mm	578*578mm
Safety Certificates	CE,RCM,SAA	CE,RCM,SAA
Warranty	3 years	3 years
Replacement	2*28W T5	4*14W T5

VBLFS-414-1-40




VBLFS-228-1-40




IES Files and Comprehensive Photometric Reports are available.
Dimmable Fitting Using Most Leading Brands Leading and Trailing edge

VBLFS-414-1-40
4000K - Cool White

— C0 / C180 — C90 / C270




(lx) — C0 / C180 — C90 / C270



Height
(m)

Eavg/Emax


Diameter(cm)

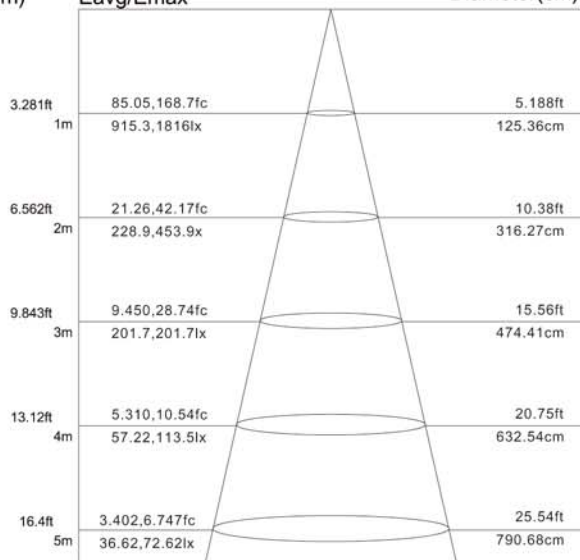


Angle: 76.67deg

VBLFS-228-1-40
4000K - Cool White

— C0 / C180 — C90 / C270




(lx) — C0 / C180 — C90 / C270



Height
(m)

Eavg/Emax

Diameter(cm)

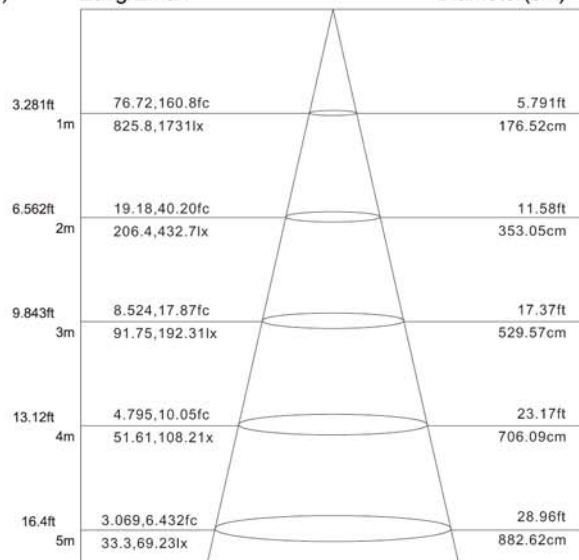

Angle: 82.86deg