

VBLFL-82x-4-40



Applications:

- Warehouses
- Caravan Parks
- Hotels
- Supermarkets
- Gardens
- Walk ways
- Exhibition Centres
- Museums
- Commercial Building
- Industrial Buildings

Features:


- IP65 Rated
- 120° Beam Angle
- Low Wattages
- Long Life of 50,000 hours




Specifications:

Model Number	VBLFL-821-4-40	VBLFL-822-4-40	VBLFL-823-4-40	VBLFL-824-4-40
Wattage	5W	10W	20W	30W
Input Voltage	DC12-24V	DC12-24V	DC12-24V	DC12-24V
LED Source	Bridgelux	Bridgelux	Bridgelux	Bridgelux
Colour Temp	4000K	4000K	4000K	4000K
Lumens Output	399lm	798lm	1596lm	2394lm
Luminaire Efficacy	79.80Lm/W	79.80Lm/W	79.80Lm/W	79.80Lm/W
CRI	75	75	75	75
Beam Angle	120°	120°	120°	120°
IP Rating	IP65	IP65	IP65	IP65
Lamp Life	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Dimension (mm)	155 x 105 x 90mm	155 x 105 x 90mm	180 x 140 x 100mm	225 x 183 x 130mm
Weight per Item	1.5kg	1.5kg	1.8kg	2.6kg
Safety Certificates	RCM 5614	RCM 5614	RCM 5614	RCM 5614
Warranty	3 years	3 years	3 years	3 years
Replacement	50W Halogen	100W Halogen	35W Metal Halide	70W Metal Halide


VBLFL-821-4-40:

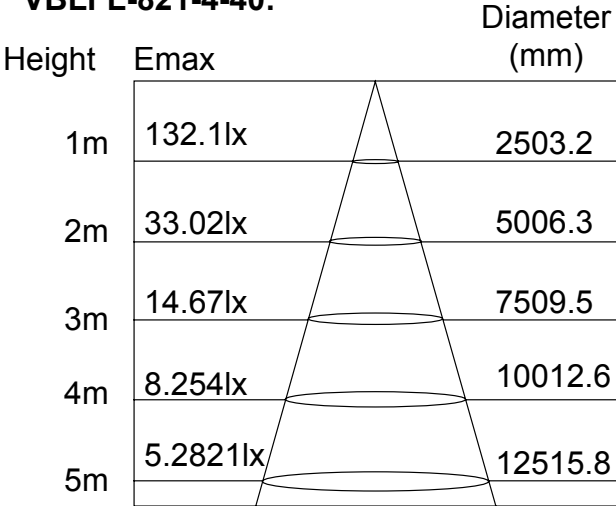


VBLFL-822-4-40:

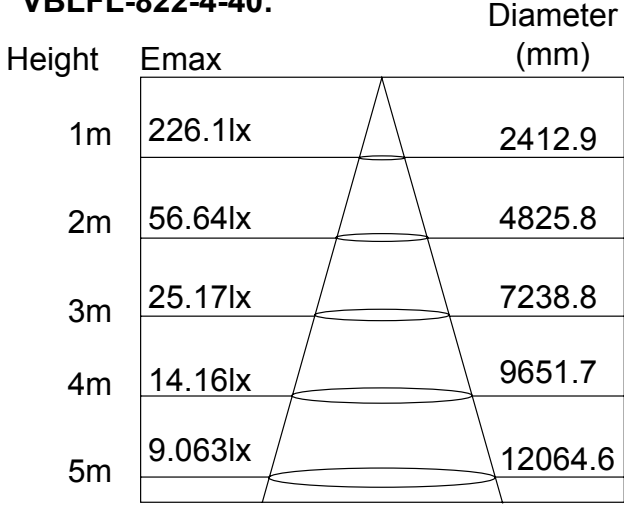

VBLFL-823-4-40:

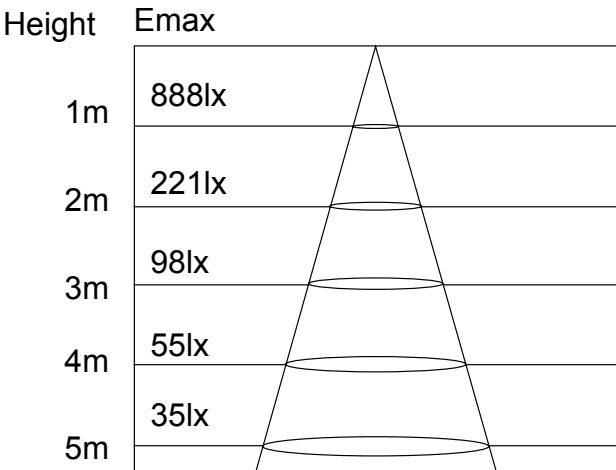

VBLFL-824-4-40:

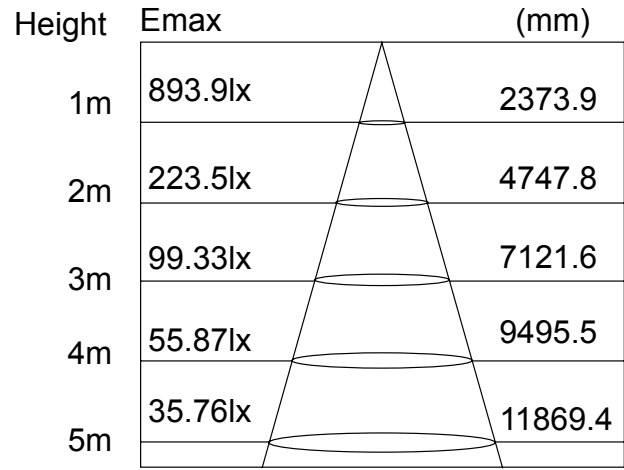

Accessories:

VBLFL-12V-ALICLIP



Allows you to power the floodlight through your car / boat or caravan battery

VBLFL-12V-CIGLIGH:



Allows you to power the floodlight through your car cigarette lighter