

VBLFL-8xx-4-40



Applications:

- Warehouses
- Factories
- Commercial Buildings
- Sports Arena's
- Security Lighting

Features:


- Long Life
- Replaces a 250W or 400W Metal Halide
- High light output
- 120° Beam angle
- 3 year warranty
- Meanwell Driver
- IP65 rated



Specifications:

Model Number	VBLFL-844-4-40	VBLFL-855-4-40
Power Consumption	120W	210W
Input Voltage	AC85-265V	AC85-265V
Output Voltage	30-36V 1800mA	30-36V 1800mA
HZ	50-60Hz	50-60Hz
LED Source	Bridgelux	Bridgelux
Colour Temperature	4000K	4000K
Lumens Output	9576lm	16758lm
Luminaire Efficacy	79.80Lm/W	79.80Lm/W
CRI	75	75
Beam Angle	120 °	120 °
Lamp Life	50,000	50,000
Energy Grade	I	I
Dimension	600mm x 360mm 230mm	780mm x 360mm 230mm
Inner Packaging Quantity	1	1
Outer Packaging Quantity	1 PCS	1 PCS
Weight per Item	11.8kg	16kg
Power Supply	LF220260NW	LF220370NW
Safety Certificates	CE / SAA	CE / SAA
Warranty	3 years	3 years
Replacement	250W Metal Halide	400W Metal Halide

VBLFL-844-4-40

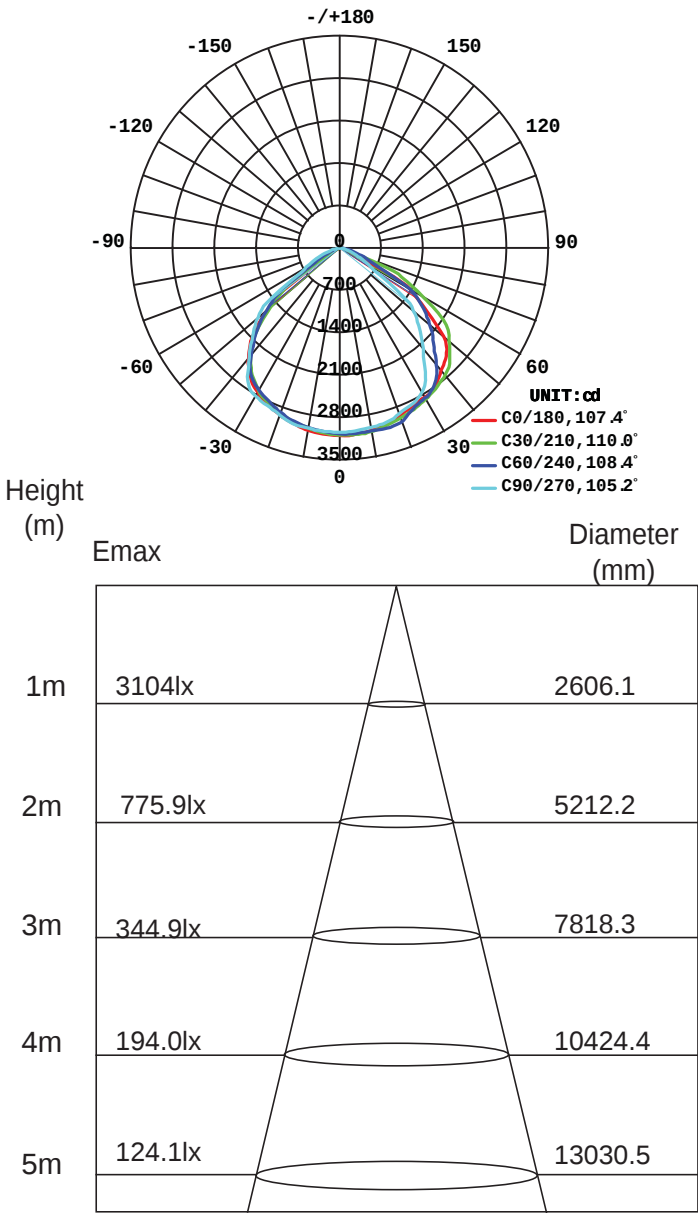

VBLFL-855-4-40

