


1A Parts in this box.

NOTE: Full (Double) size is shown here. Other sizes differ in overall size of components.

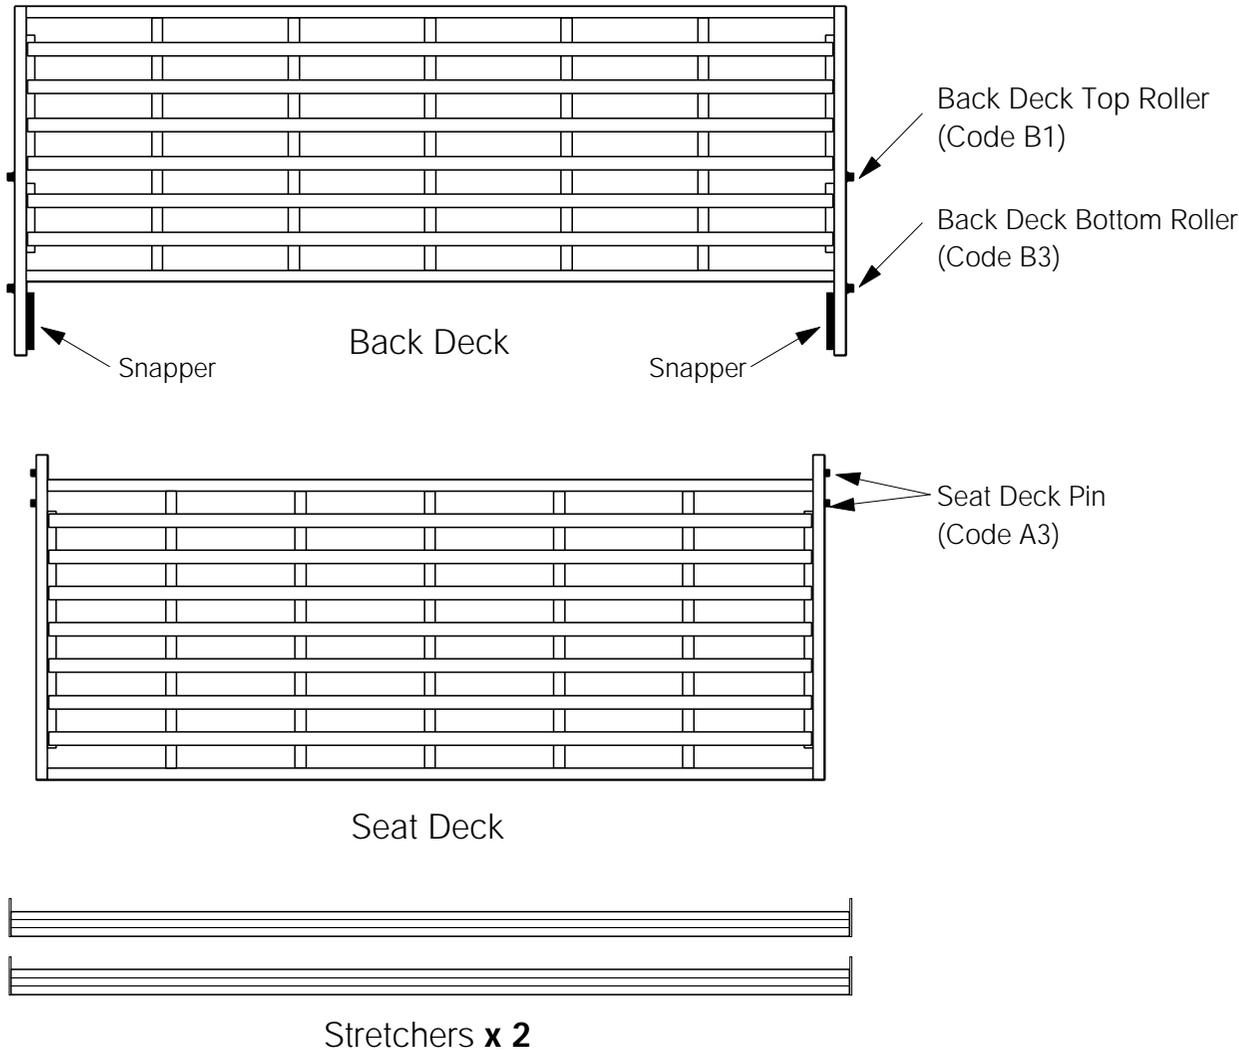


featuring the Rubber
SNAPPER™

Note: Shoe Fittings™ including the Snapper™ are Patent Pending: US#60/201,672 and US#09/760,749.

2A Fit Bolts Loosely to Arms.

Insert the 20mm Bolts (from the Arm Box) into the bottom two holes on the Arms. Screw in about five turns only.

Your arm style may vary from that shown here.

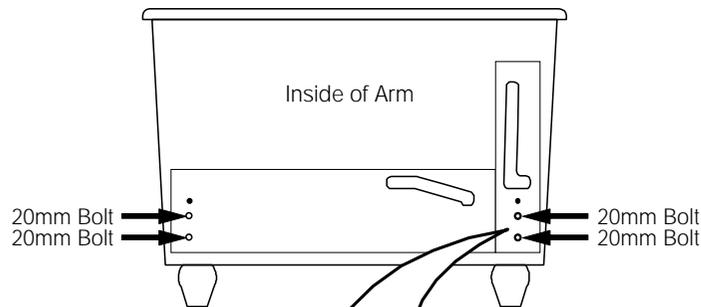


Note: Leave the top hole empty!

The Bolts should be left sticking out like this.

2B Hook Stretchers onto Arms.

Carefully hook the Stretchers on to the Bolts on the Arms. Note that the front stretcher has Metal Plates which should be assembled upwards.


Do not tighten the Bolts yet - the Arms need to be loose to allow the Seat and Back Decks to be assembled.

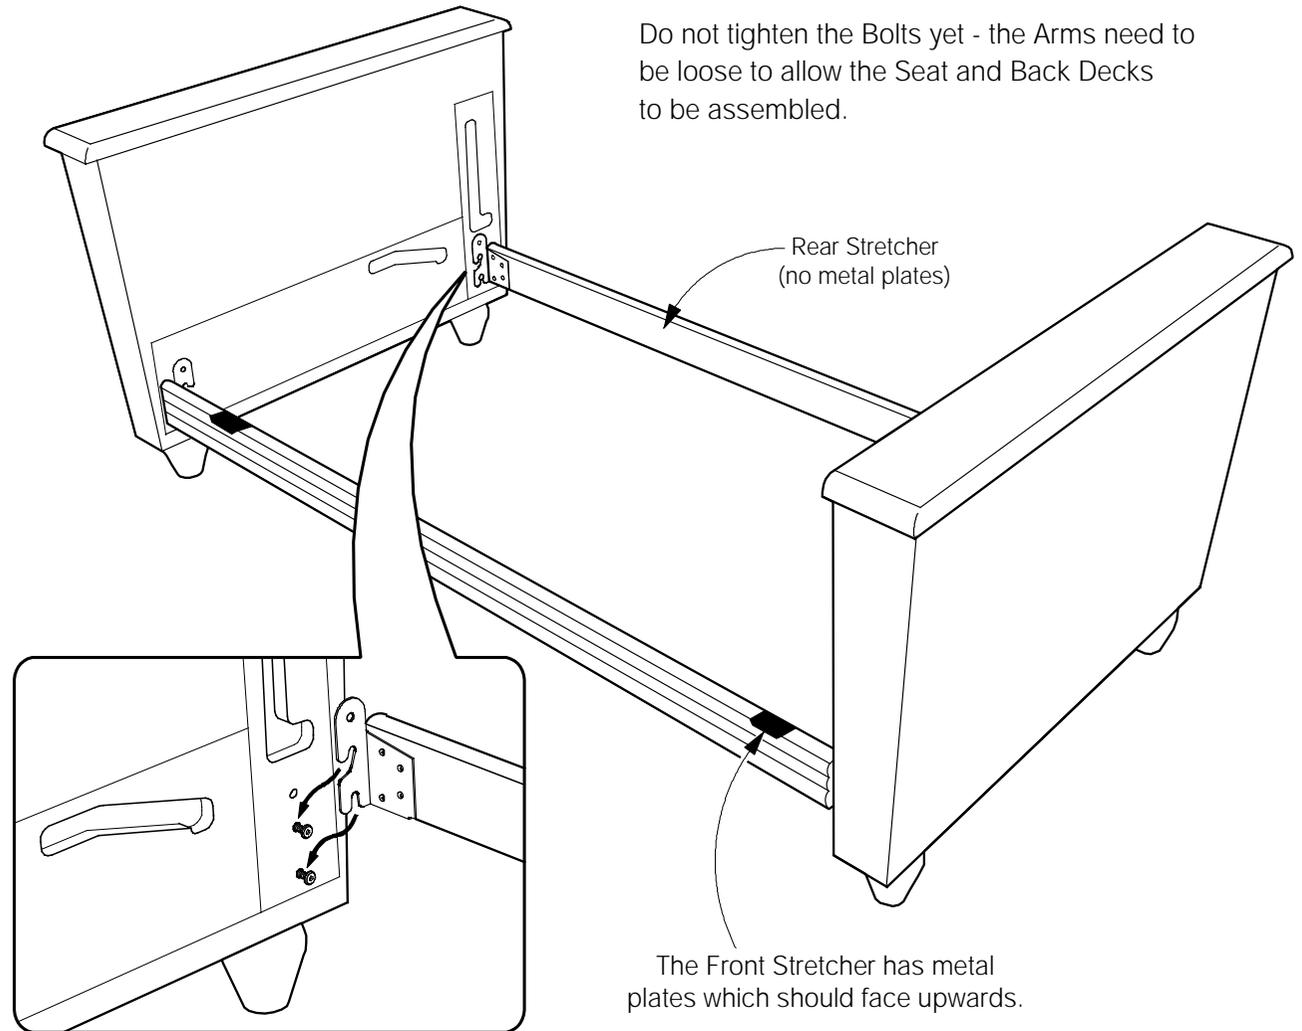


3A Fit the Back Deck into Position.

Be sure that the Arm Bolts are loose.

Insert the Back Deck lying flat. Insert one end first, then gently lower the other end into position.



CAREFUL! These can scratch the Arms

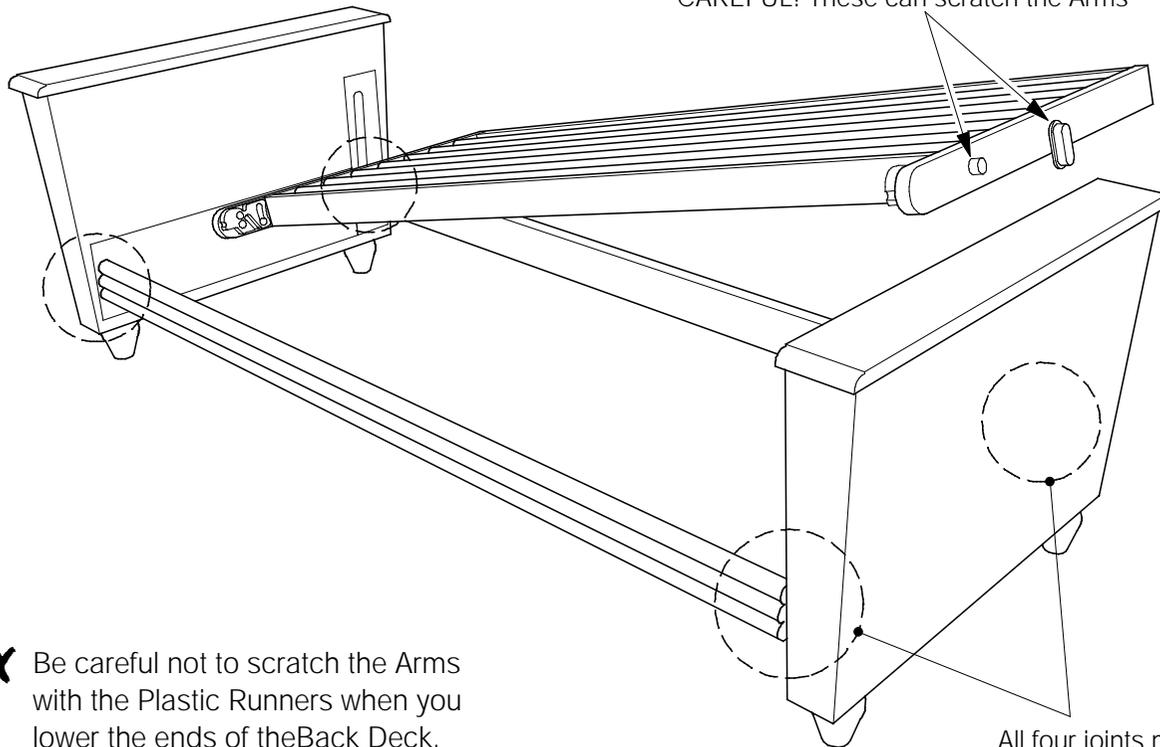


X Be careful not to scratch the Arms with the Plastic Runners when you lower the ends of the Back Deck.


All four joints must be left LOOSE.

3B Tighten all the Bolts.

When you have the Back Deck fitted lying flat, tighten all the Bolts.

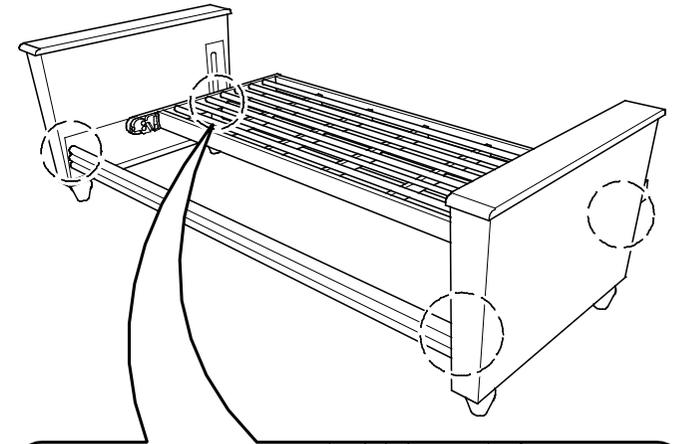

3C Fix the Top Bolts on the Stretchers.

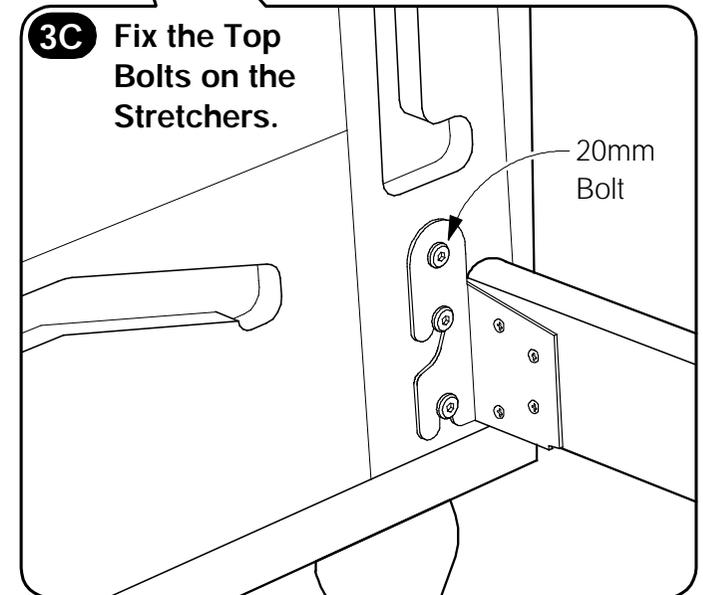

Assembly Instructions

Fit the Seat Deck

Chair • Love seat • Full • Queen

SHOE FITTINGS™ Bronze



SF 0303

4A Hook the Seat Deck onto the Snapper.

Lift the Seat Deck in vertically, so the Pins meet with the Rubber Snapper. The head of the Snapper should fit **between both Pins**.


Just remember:

- The Top Pin - fits over the top,
- The Lower Pin - goes underneath.

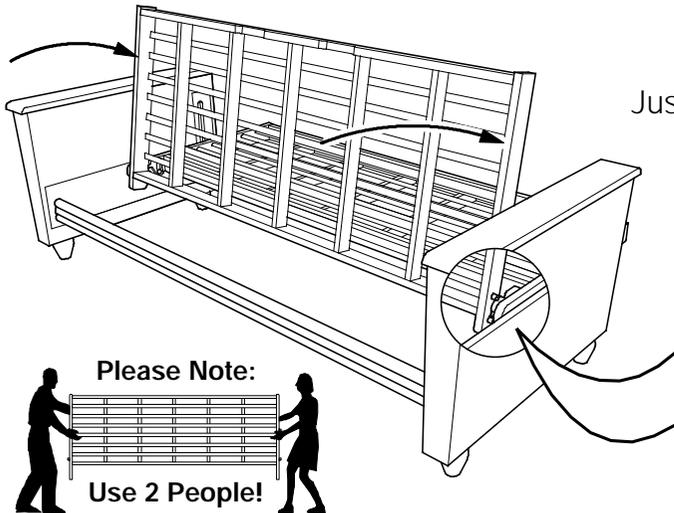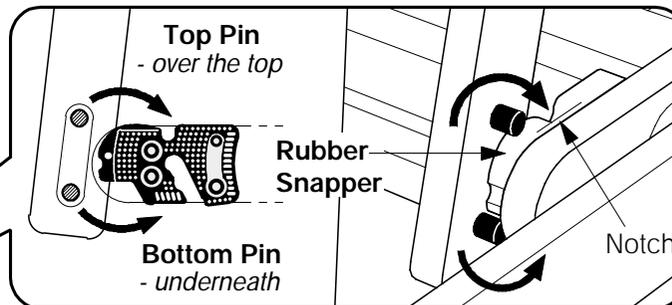


4B Pull the Seat over the "Snap Point."

You will need to Pull Hard.

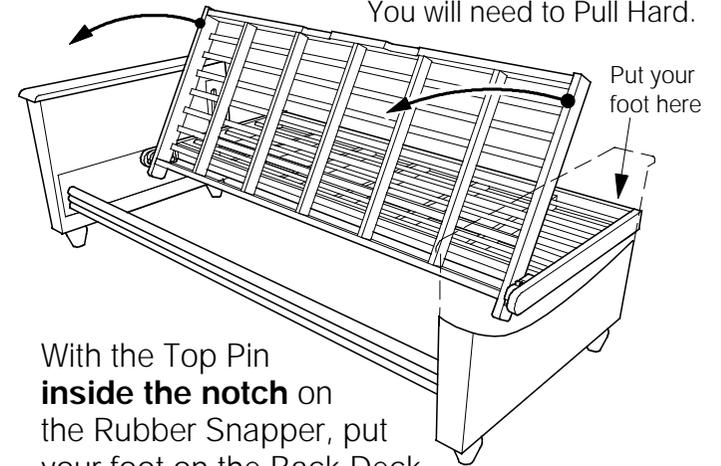


With the Top Pin **inside the notch** on the Rubber Snapper, put your foot on the Back Deck and pull the Seat over the "Snap Point"

4C Push down on the Seat, and the Back will Lift.

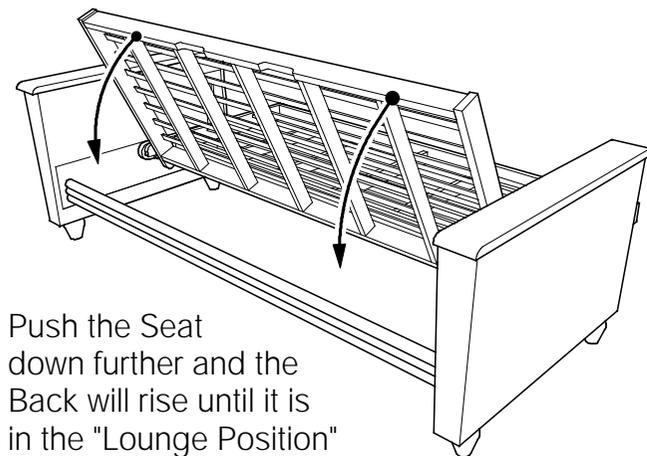


Push the Seat down further and the Back will rise until it is in the "Lounge Position"

4D This is the Lounge Position.

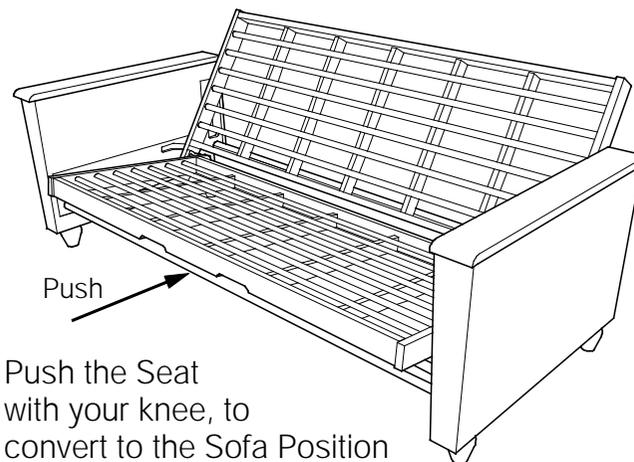

Push the Seat with your knee, to convert to the Sofa Position

4E This is the Sofa Position.

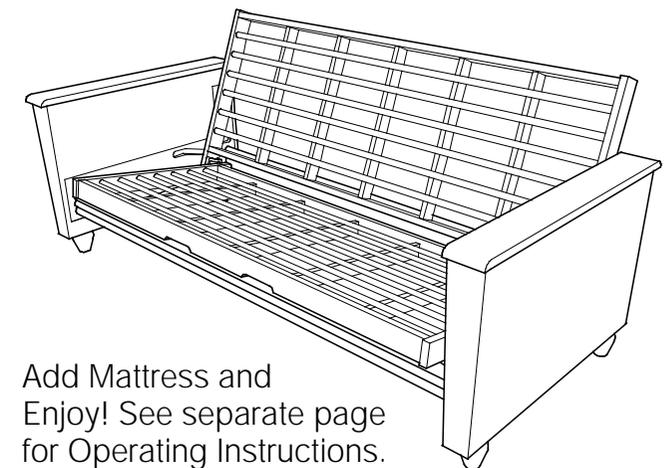


Add Mattress and Enjoy! See separate page for Operating Instructions.

5A From the Bed position, lift the Seat.


Please Note:

Use 2 People!

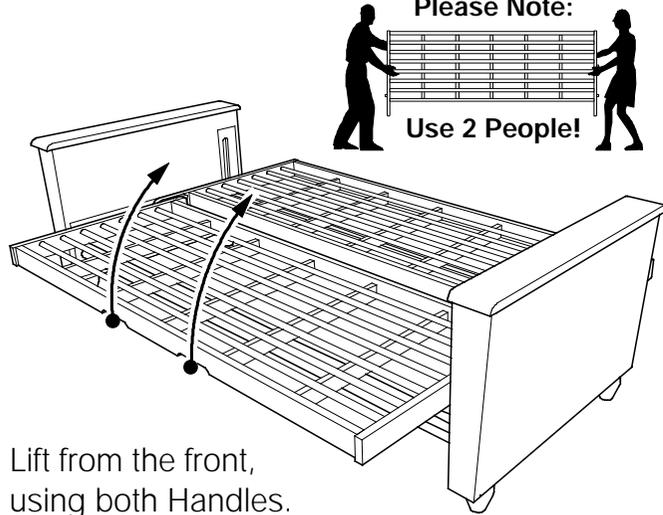

Lift from the front, using both Handles.


5B Lift the Seat all the way.

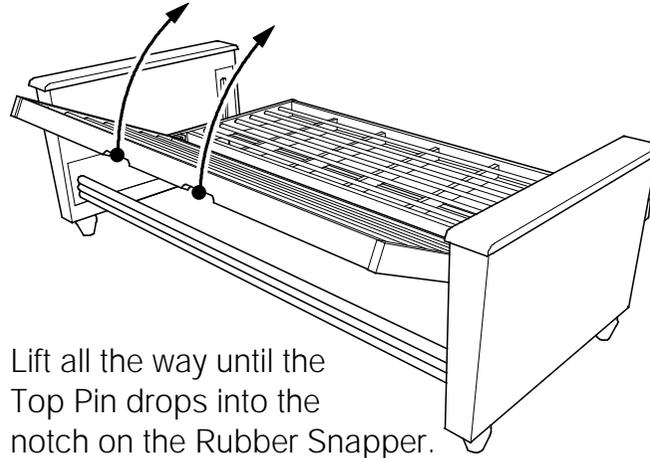

Lift all the way until the Top Pin drops into the notch on the Rubber Snapper.


5C Push the Seat over the "Snap Point."

You will need to Push Hard.

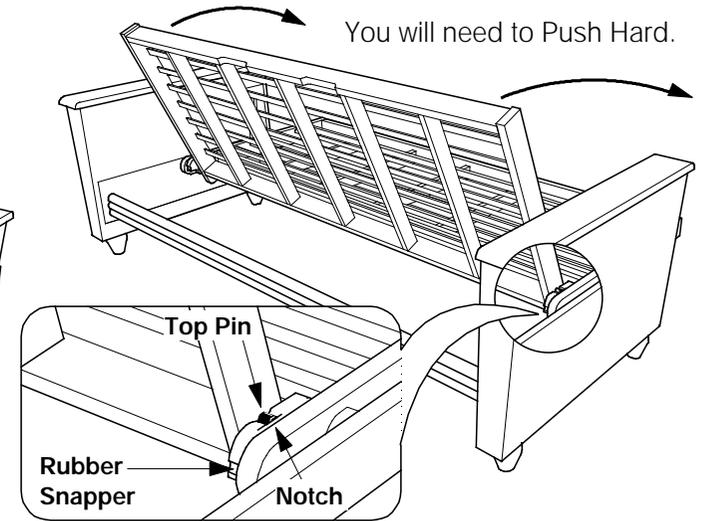


5D From the Back, lift out the Top Pin and ease the Seat Deck forward.

Lift and ease the Deck forward

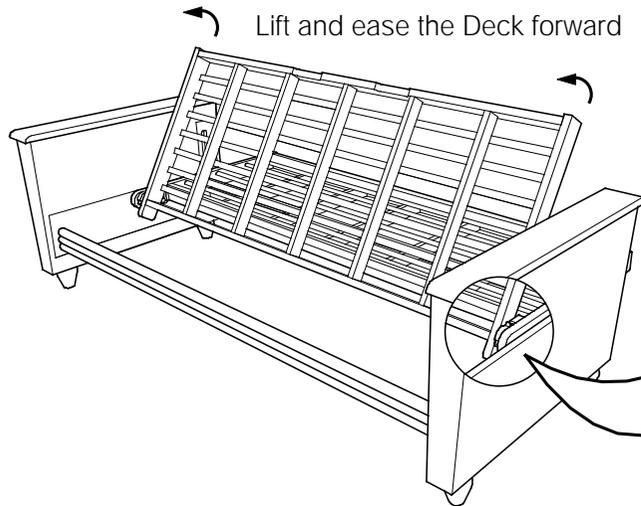

Lift up so the Top Pin is out of its notch in the Rubber Snapper. Ease the Back Deck forward, keeping it orientated vertically.

5E Lift the Seat clear of the frame.

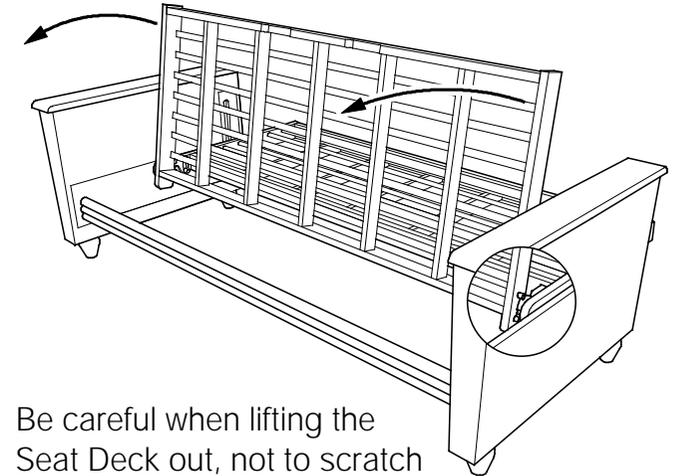

Be careful when lifting the Seat Deck out, not to scratch the Arms with the Rollers.