
## Installation Instructions for Accessories for Series: D & E



### 24" TOWEL BAR

- **Step 1-** Mount both mounting brackets (**PS30**) supplied with screws (**PS31**) and anchors (**PS32**) to wall by first choosing desired height above the floor of towel bar (this distance is based on the convenience of the user, there is no correct height).
- **Step 2-** Using supplied template (located on the back of the packing tray) make four marks on wall (24" apart). Use a level to make sure that the two top marks are parallel to the floor.
- **Step 3-** Hold mounting bracket (**PS30**) over first mark and align top mark on the wall with top hole in bracket. Check to see if bottom mark aligns with hole in bracket (**PS30**). Using the level, check again to make sure that the two top marks for the two holes in mounting bracket are also level and one above the other.
- **Step 4-** Drill hole in the center of each mark (if drilling through tile use a masonry drill) and push anchors (**PS32**) into holes.
- **Step 5-** Install both mounting brackets (**PS30**) using the screws (**PS31**) through the holes and into the anchors (**PS32**).
- **Step 6-** Push both towel bar ends (**PS33**) onto towel bar (**PS41**) and place over mounting brackets (**PS30**). Installed on wall by pushing in the top first and pulling down over the bottom of the mounting brackets. \*(make sure that the set screw holes on the towel bar bases (**PS33**) are facing down toward the floor.)
- **Step 7-** Install both set screws (**PS39**) into the bottom holes of both the towel bar ends and tighten with Allen wrench (**PS40**) supplied.

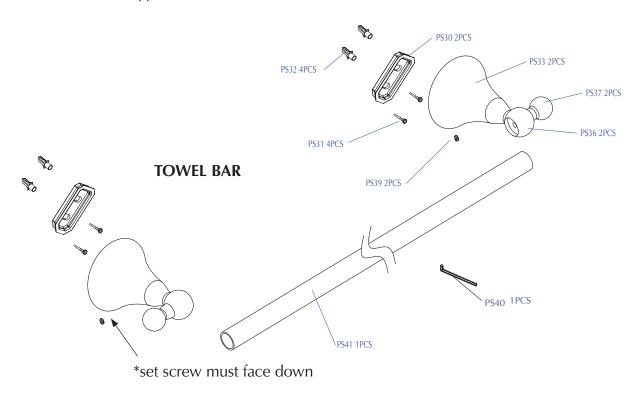

### **IMPORTANT CLEANING NOTICE**

To maintain your accessories use only mild soap and water Never use acids, harsh abrasives or detergents.






# Installation Instructions for Accessories for Series: D & E


# ACC2

### **TOWEL RING**

- **Step 1-** Locate where accessory is to be mounted and make a mark where the center of the accessory base (**PS33**) is.
- **Step 2-** Using mounting bracket (**PS30**) as a template mark top and bottom holes, use level to make sure the two holes are perpendicular to the floor.
- **Step 3-** Drill hole in the center of each mark (if drilling through tile use a masonry drill) and push anchors (**PS32**) into holes.
- **Step 4-** Install mounting bracket (**PS30**) using the screws (**PS31**) through the holes and into the anchors (**PS32**).



**Step 6-** Install set screw (**PS39**) into the bottom hole of accessory base (**PS33**) and tighten with Allen wrench (**PS40**) supplied.

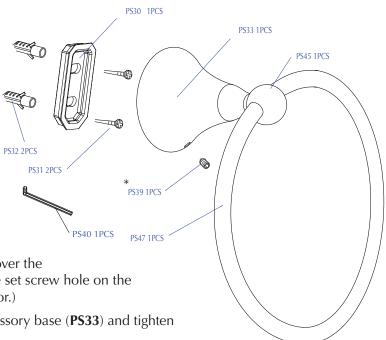


PS33 1PCS

PS35\_1PC

PS45 1PCS

PS34 1PCS

#### **ROBE HOOK**

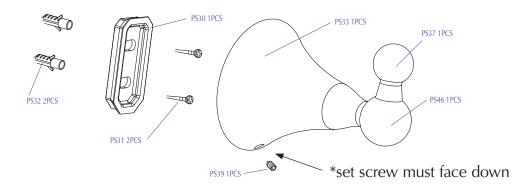

#### **PAPER HOLDER**

NOTE: The open end of loop paper holder (PS42) should be facing back towards the wall. It can be reversed by removing inner screw (PS34) and lock washer (PS35) on the inside of paper holder base (PS33). Turn loop paper holder (PS42) over (180 degrees) and re-install screw

and lock washer then tighten. This allows the paper holder to be mounted either on the left or right side. If the open end of the loop paper holder is facing away from the wall, the paper roll will have a ten

facing away from the wall, the paper roll will have a tendency to come off the loop paper holder when the paper roll is pulled down.

PS32 2PCS

PS30 1PCS

PS31 2PCS



To maintain your accessories use only mild soap and water Never use acids, harsh abrasives or detergents.

Giagn



PS39 1PCS

888.560.5222 FAX 888.560.8727 Monday - Sunday 8:00am to 6:00pm EST

PS40 1PCS

PS44 1PCS

PS37 1PCS

PS42 1PCS