

# GENERIC


## 3 Pc. Roman Tub Stone Mountain, Brookhaven, Hexa - 1/2" valves

### Attention Installer:

To ensure a proper seal, the top of the brass spout nipple must be installed at 7/8" above the finished deck.

If finish deck thickness is unknown at rough-in, leave access to valves and tee to allow adjustments.

Flow rates: 12GPM @ 60psi

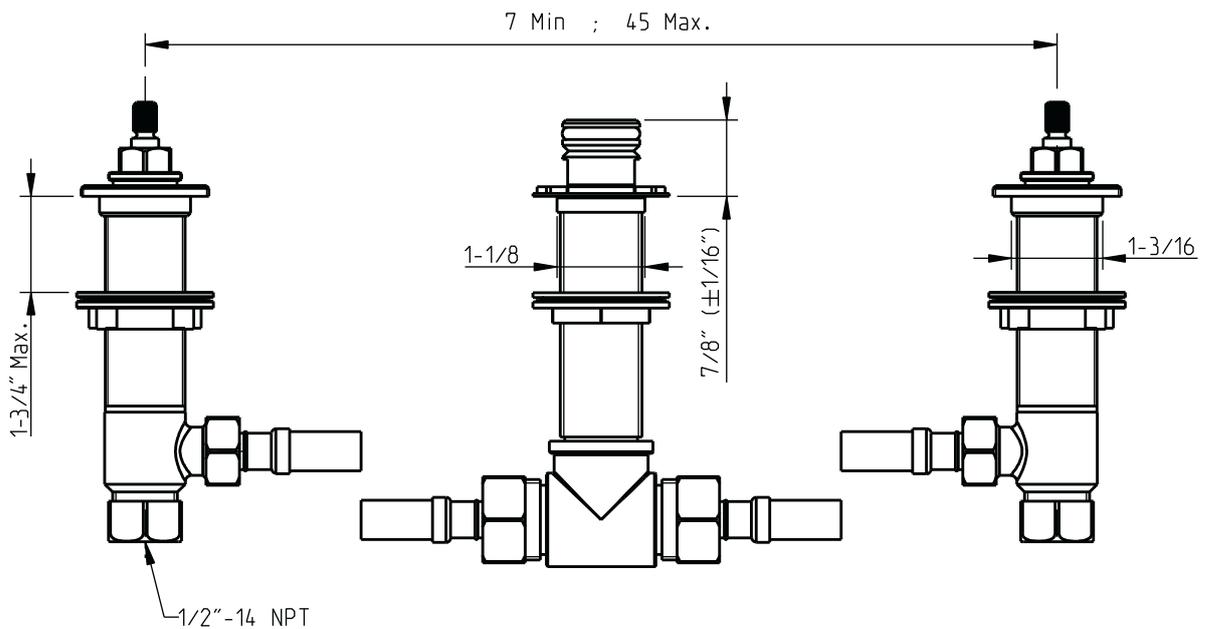


dimensions inches



www.cifial.pt | cifial@cifial.pt  
 cifial@cifial.es  
 www.cifial.co.uk | sales@cifial.co.uk  
 www.cifialusa.com  
 www.cifial.pl | cifial@cifial.pl

**Inlets:** 1/2" pipe thread or 1/2" compression  
**Maximum Deck Thickness:** 1 1/4"  
**Rough Deck Recommended Hole Diameters:**  
 Valve Bodies: 1 1/4"  
 Nipple: 1 1/4"  
**TRIM & Rough sold separately**

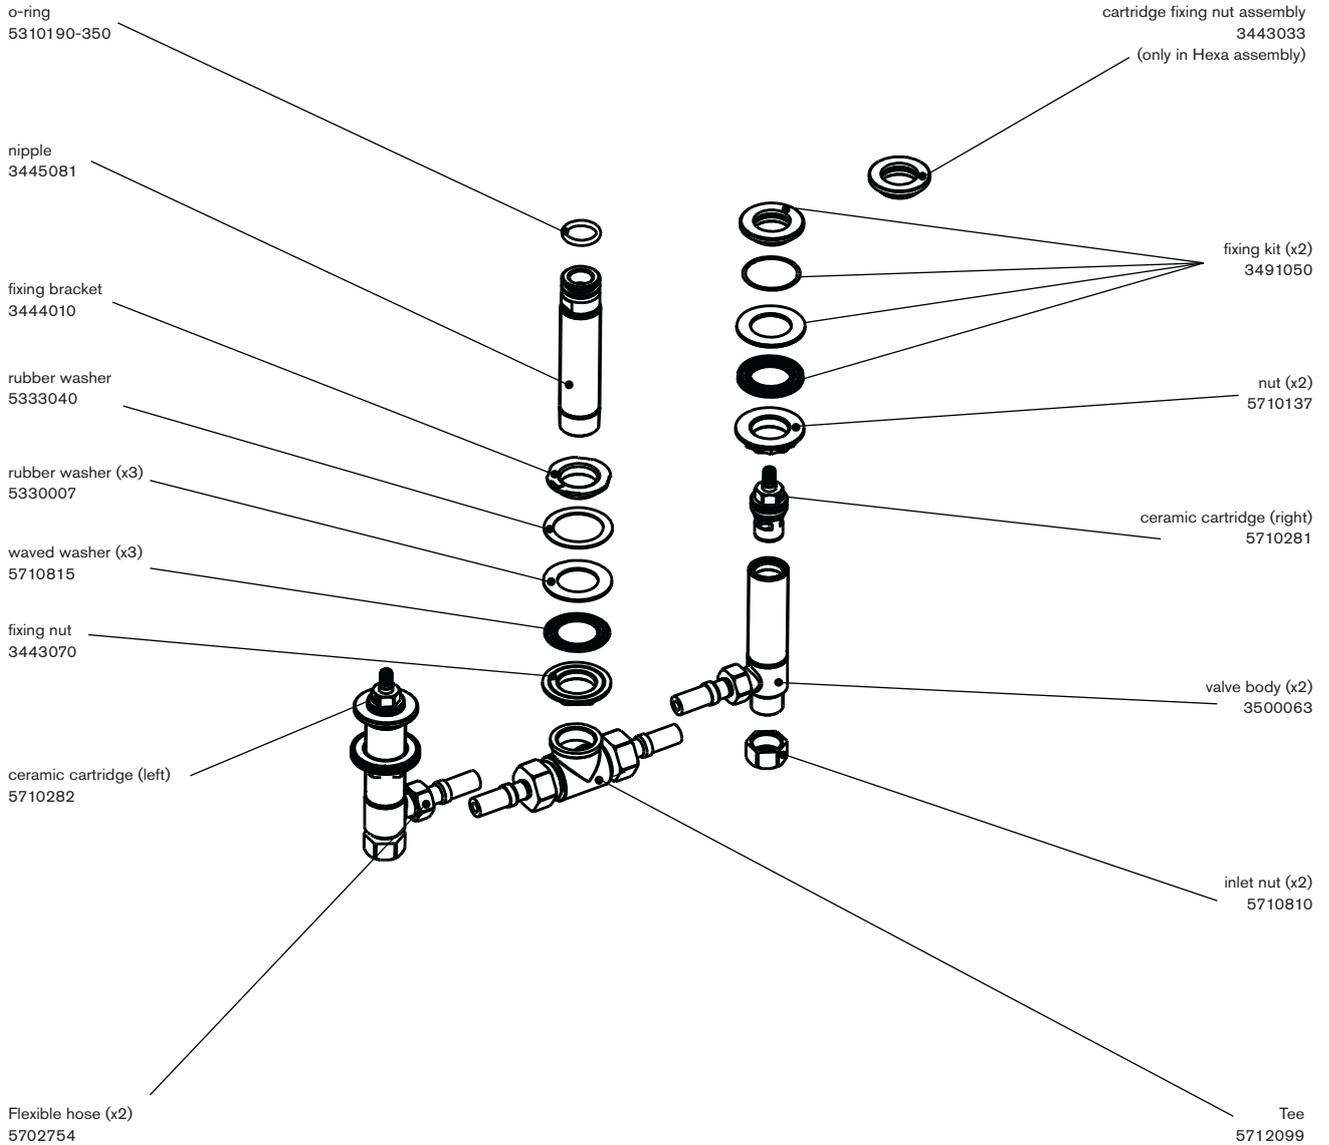

www.cifial.pt | cifial@cifial.pt  
 cifial@cifial.es  
 www.cifial.co.uk | sales@cifial.co.uk  
 www.cifialusa.com  
 www.cifial.pl | cifial@cifial.pl

