


4-Point Hammock with Stand

Assembly Instructions – No Tools Required

Model # 6401-33GC


Weight Limit 250 lbs.




Congratulations on purchasing this 4-pt Hammock and Stand. We hope it provides hours of relaxation. **If you have questions regarding this product, or if you are missing parts, please contact customer service at (800) 295-6758.**

This Carton Contains:

- 2 – Header Bars (A)
- 4 – Upright Poles (B)
- 2 – Crimped Base Rails (C)
- 2 – Non-crimped Base Rails (D)
- 2 – Metal Dowels (E)
- 1 – Hammock Bed (F)
- 1 – Pillow (G)
- One Bag of Hardware Consisting Of:
- 4 – Loop Rings (H)
- 4 – Chains (I)
- 4 – Spiral Hooks With Attached Lock Nut (J)

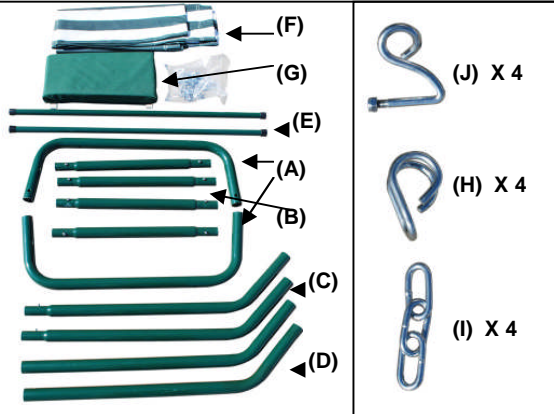


Illustrations:

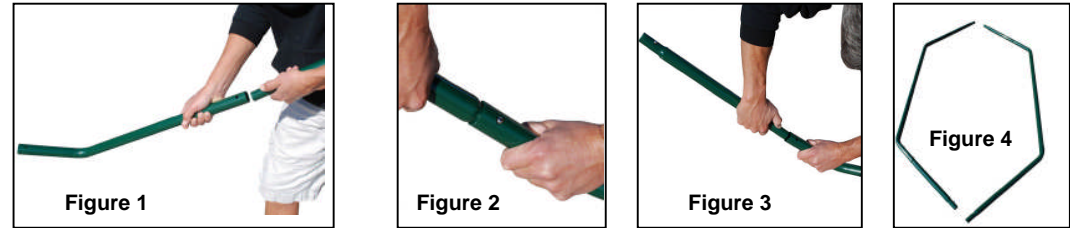

Assemble Stand (See Illustrations)

1. Locate the two crimped base rails (c), and the two non-crimped base rails (D). Insert the crimped end of one of the crimped base rails (c) into the straight end of the non-crimped base rail (D) until the silver lock-pin is fully engaged in the lock-pin hole as shown in **Figure 1**. Repeat with second leg by repeating this procedure. **Make sure the silver lock-pins are fully engaged into the lock-pin hole, Figure 2.**
2. Locate the four upright poles (B) and insert one pole into each of four ends on the two leg assemblies as in **Figure 3**. You should now have legs and uprights connected as shown in **Figure 4**.
3. Locate the two header bars (A). While holding the header bar (A), insert one of the four upright pole ends of the assembled legs into the header bar until the silver lock-pin is fully engaged in the lock pin hole as shown in **Figure 5**. Repeat with the other end of this header bar, and then repeat the procedure with the second header bar for the opposite end of the stand.
4. Locate the four spiral hooks (J). Remove lock washer from each spiral hook and insert the straight ends of the spiral hooks through the holes on the top of the two header bar and reattach the lock nut to the spiral hook as shown in **Figure 6**. **Make sure lock nuts are located on the bottom side of the header bars, and are all securely tightened.**

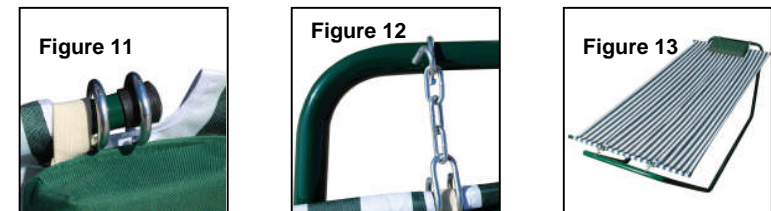

Assemble And Attach Hammock Bed (See Illustrations)

1. Locate the four Loop Rings (H), and the four chains (I). Loop one chain onto each Loop Ring as shown in **Figure 7**.
2. Locate the two metal dowels (E) and the hammock bed (F). Each end of the hammock bed has a sewn hem. Start inserting the metal dowel (E) into the sewn hem of the fabric bed as in **Figure 8** until the dowel reaches the hem cut-out.
3. Now locate one of the Loop Rings with the attached chain. Continue to insert the metal dowel through the loops of the loop ring and into the sewn hem beyond the hem cutout as in **Figure 9**. Continue to slide the dowel all the way to the end of the hammock bed as shown in **Figure 10**. Attach the pillow (G) by looping the elastic loops onto the second metal dowel while you are repeating the above procedure for the opposite end of the fabric hammock bed as shown in **Figure 11**.
4. Now attach the fabric hammock bed to the stand by looping the chain links over the spiral hooks that are now attached to the header bars as in **Figure 12**. Make sure you loop the same chain link on each of the four spiral hooks so bed hangs evenly. **Figure 13**.

Caution:

Never exceed the weight capacity of 250 lbs. Never allow children to use the hammock without adult supervision. Always inspect the hammock before each use to assure all lock-pins are fully engaged and hammock is assembled securely. - - - Store in a cool dry place. Wipe clean with a damp cloth.



Algoma Net Company
Div of Gleason Corporation
1525 Mueller St Algoma, WI 54201
(800) 295-6758
email: algomasales@algomanet.com