

BENTLEY

FR44500BBZ

Bulbs: 60W CAND. Replacement Parts: SHADE : R44500SH CRYSTAL: R44500CRY



ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first installing the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall and then installing the fixture candle sleeve.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 Prepare gem strap (a) by threading two 8-32 screws (c) provided into back of gull wing bracket of gem strap (a). Holes chosen to thread screws into should correspond with mounting holes (d) in back plate - see Drawing 1.
- 2 Mount gem strap (a) to junction box (j) with two 8-32 screws (b), 1" long (not provided).

STEP 2 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

STEP 3

- 1 To mount back plate to wall, slip the two mounting screws (e) through the two mounting holes (d) in backplate (e).
- 2 While holding fixture in place, thread the two ball knobs (f) onto mounting screws (e) and tighten.


STEP 4

- 1 Slip candle sleeve (1) over socket (2) - see Drawing 2.
- 2 Slip shade cup (3) onto top of candle sleeve (2).
- 3 Thread tail (4) onto bottom of arm assembly (5).
- 4 Attach crystal pendalogue (6) to end of arms (7).


crystal 6
R44500CRY



[DRAWING 1]

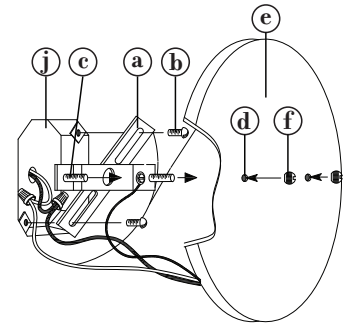

[DRAWING 2]

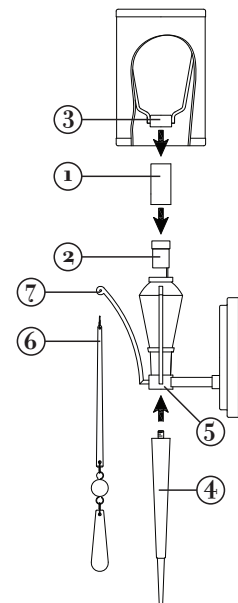

FREDRICK RAMOND
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

5.13.10