

JASPER

FR40204IRN

Bulbs: 60W CAND. Replacement Parts: GLASS: R40206GL



ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the main body, installing the mounting hardware to the junction box, making all necessary electrical connections, hanging the fixture, and then installing the glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1


- 1 When assembling the main body, there will be one set of parts that have the supply wire laced through. These parts must be slipped along the wire and assembled according to the following instructions. The other set of parts without the supply wire are assembled in the same order.
- 2 First slip stem (1) along wire and thread into coupler (a) located on the top of the crossbar (b). thread matching stem into coupler (a) on opposite and of crossbar - See Drawing 1.
- 3 Slip top crossbar (2) over threaded tubes on end of stems (1).
- 4 Slip top stem (3) along wire and thread onto threaded tube exiting top crossbar. Now thread matching stem on opposite threaded tube.
- 5 Slip loop (4) along wire onto threaded tube on end of top stem. thread matching loop on opposite threaded tube. NOTE: loops have a set screw (c) to lock them in place. The loops should be parallel with the top crossbar (2) previously installed. Use Allen wrench (d) provided to tighten set screws.

STEP 2 Refer to Hanging Instruction Sheet [FRIS19-75] to hang fixture.

STEP 3

- 1 Fixture can now be lamped accordingly.
- 2 Place glass cylinder (5) over socket and bulb and slip into glass holder (6) - See Drawing 1.

[DRAWING 1]

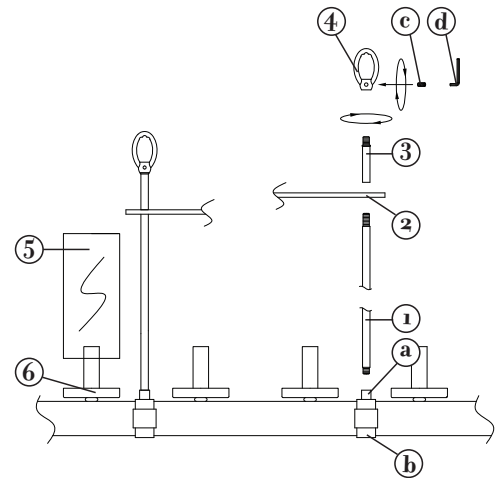

FREDRICK RAMOND
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

10.18.10