

Van Buren Pendant

600VBNMP

1.0



GENERAL PRODUCT INFORMATION:



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is suitable for indoor damp locations.

This product can be dimmed with a standard incandescent dimmer.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**

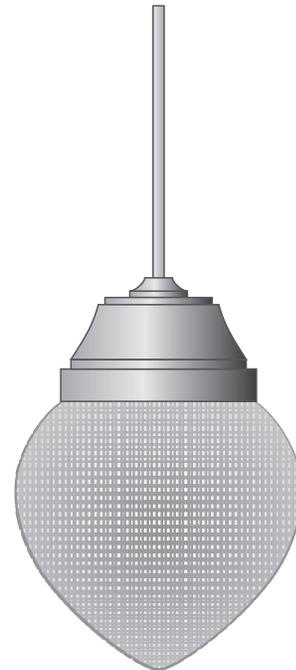


Install the Fixture

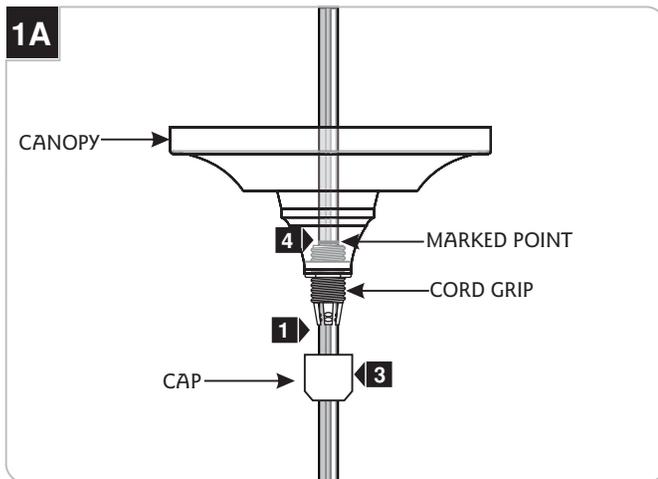

- 1** Feed end of the fixture cord through the cap, and cord grip into the canopy.
- 2** Adjust the fixture height (from bottom of the fixture shade to top of the canopy) by moving the cord up or down.
- 3** When desired height is achieved, slightly tighten the cap.
- 4** From inside mark the cord right behind the cord grip for strain relief location.

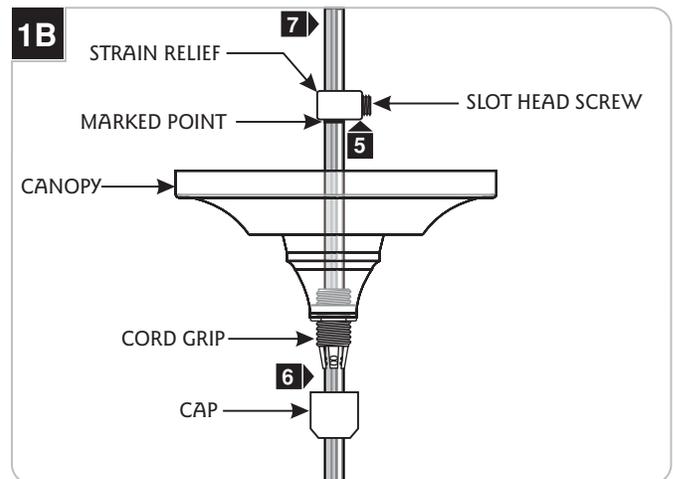


- 5** Loosen the cap and the slot head screw, and feed the cord through the strain relief. Place the strain relief right above the marked point and tighten the slot head screw.
- 6** Slide the canopy up against the strain relief and tighten the cap to cord grip.
- 7** For power connection, leave at least 6" of the cord exposed in the back of the canopy.
- 8** Cut off the excess cord with a sharp cutter.

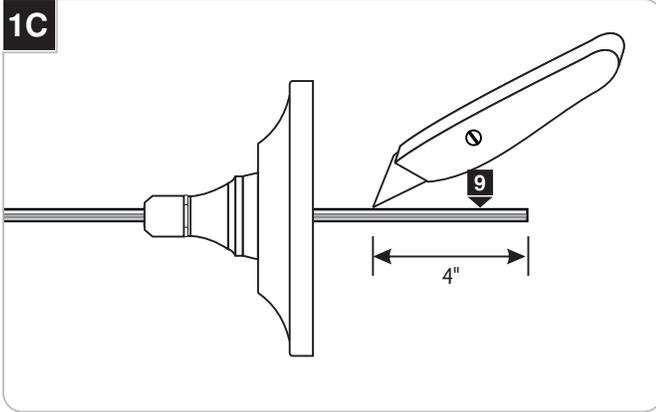

9 From the end of the cord, strip the outer insulation 4" using a sharp knife and needlenose pliers. ***Make sure not to cut inner wires.***

10 Strip 1/4" of insulation from the inner insulated wires. The bare inner wire is the ground wire.

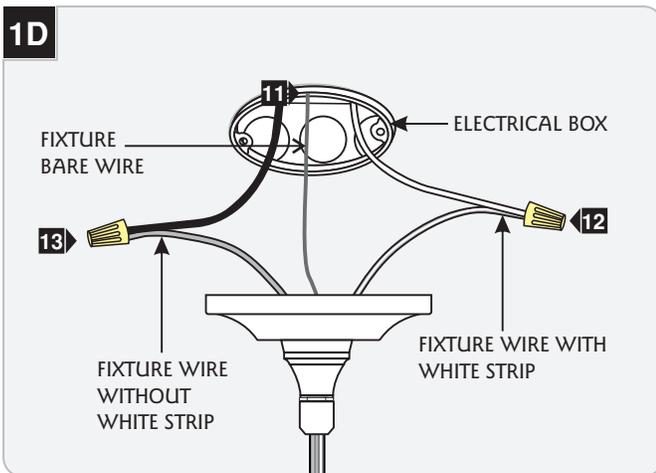


NOTE: Use the provided universal round crossbar when the canopy holes do not line up with the electrical box holes.

11 Connect the fixture bare uninsulated wire to the ground in accordance with local electrical codes.

12 Connect the fixture wire with the white strip to the 120 volt neutral power line wire with a wire nut.


13 Connect the last fixture wire to the 120 volt hot power line wire with a wire nut.

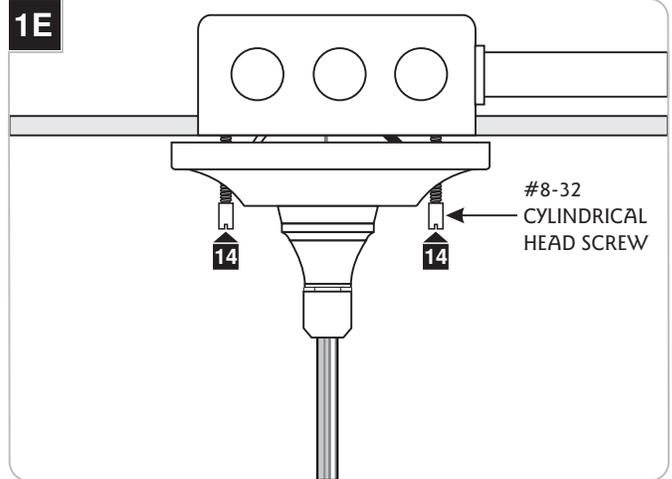

14 Place all wires and wire nut connections properly into the electrical box and mount the canopy to the electrical box with the provided two #8-32 cylindrical head screws.

Install the Lamp and Glass Shade

2A

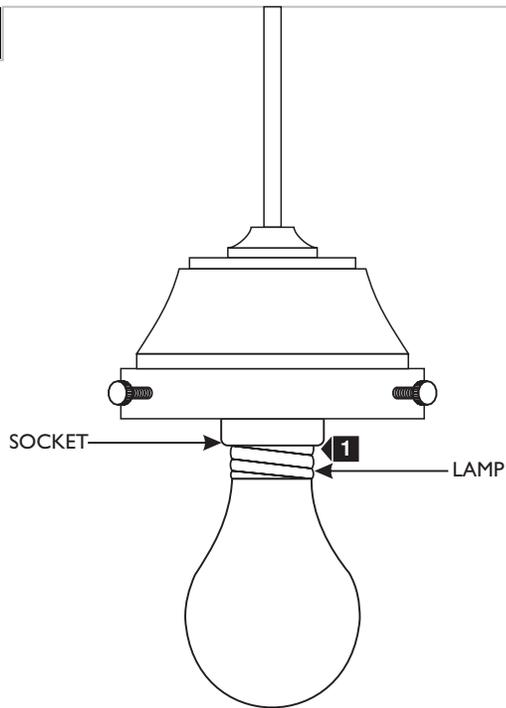


CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

Use **MAX** 120 Volt, **75** Watt Type A19 Medium Base Lamp.



1 Screw the lamp into the socket.

2B

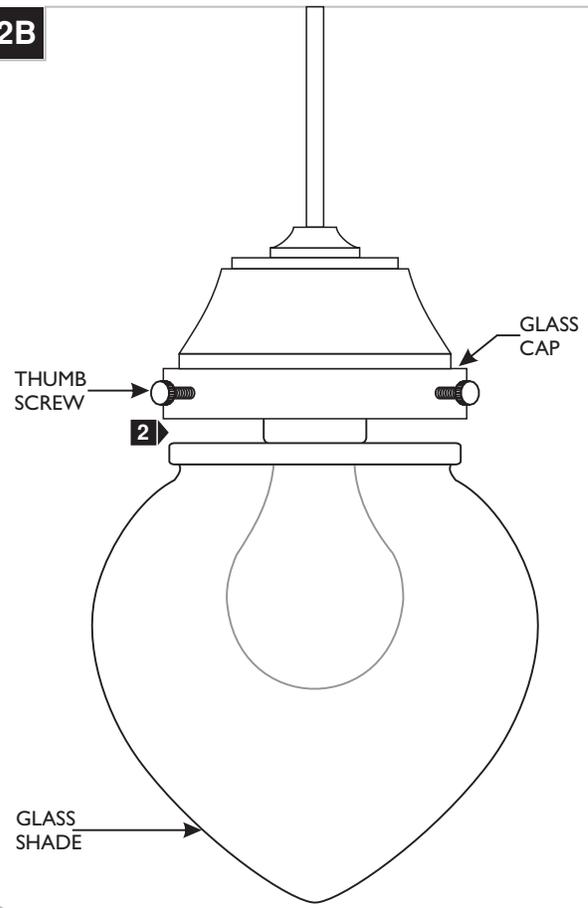

2 Place the glass shade completely into the glass cap and tighten the three thumb screws to secure the glass shade in place.

NOTE: Do not over tighten the thumb screw which may cause the glass shade to break.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.wilmettelighting.com

© 2008 Wilmette Lighting Company. All rights reserved. The "Wilmette Lighting Company" graphic is a registered trademark of Wilmette Lighting Company. Wilmette Lighting Company reserves the right to change specifications for product improvements without notification.

A Generation Brands Company