



A



A BDT250 Bird Bath De-Icer With Aluminum Base
250 Watts, 120 Volts

- Compact, Durable, Aluminum Heating Element
- PTFE Non-stick Coating
- Low Profile
- Large Surface Area for Cooler Operation
- Multiple Thermostats for Safe, Optimized Control
- Over-Temperature Protection
- 10 Foot Cord with Abrasion Protector
- cULus Listed
- Three Year Warranty


The BDT250 has a durable, non-stick coating, compact aluminum base in a low-profile design. Fins provide large surface area to make the unit run cooler while putting out the same amount of heat as conventional de-icers. Channels within the base promote water flow as the water is heated. Cooler running, non-stick coating, and flowing water all combine to reduce mineral buildup.

Multiple thermostats allow efficient control while providing over-temperature protection. The BDT250 is safe to use in plastic bird baths and comes with a 10 foot cord.

B 300 Bird Bath De-Icer
200 Watts, 120 volts

- Thermostatically Controlled
- Over-Temperature Protection
- Low Profile
- cULus, CSA Listed
- Three Year Warranty
- 15 Inch Cord

This De-icer features a built-in thermostat for temperature control and over-temperature protection. A stainless-steel guard shields wildlife from contacting the heating element.

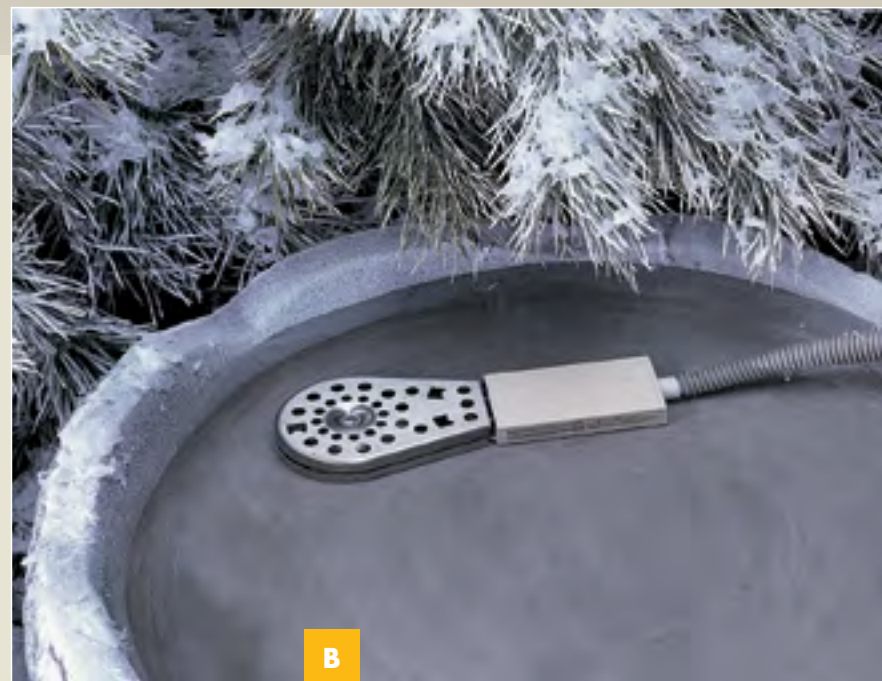

B

Unheated Bird Baths



F

C 290 Deluxe Non-heated Bird Bath with Pedestal

Easy to use, 20" diameter Bird Bath and Pedestal sets up quickly and is easy to clean. The gradual slope on the bowl is easy for birds to use, and it will not crack in freezing temperatures.


D 390 Water Rippling Bird Bath™ with Pedestal And Water Wiggler®

Easy to use, 20" diameter birdbath and pedestal with Water Wiggler sets up quickly and is easy to clean. The gradual slope on the bowl is easy for birds to use and it will not crack in freezing temperatures.



Complete with Pedestal

D



ALL PRODUCTS ON THIS PAGE ARE
LOCKNDRY COMPATIBLE
PATENT NOS. 8,322,047; 8,182,279; 8,197,278; 7,833,037; D604,245
OTHER PATENTS PENDING