


FIGURE 1.

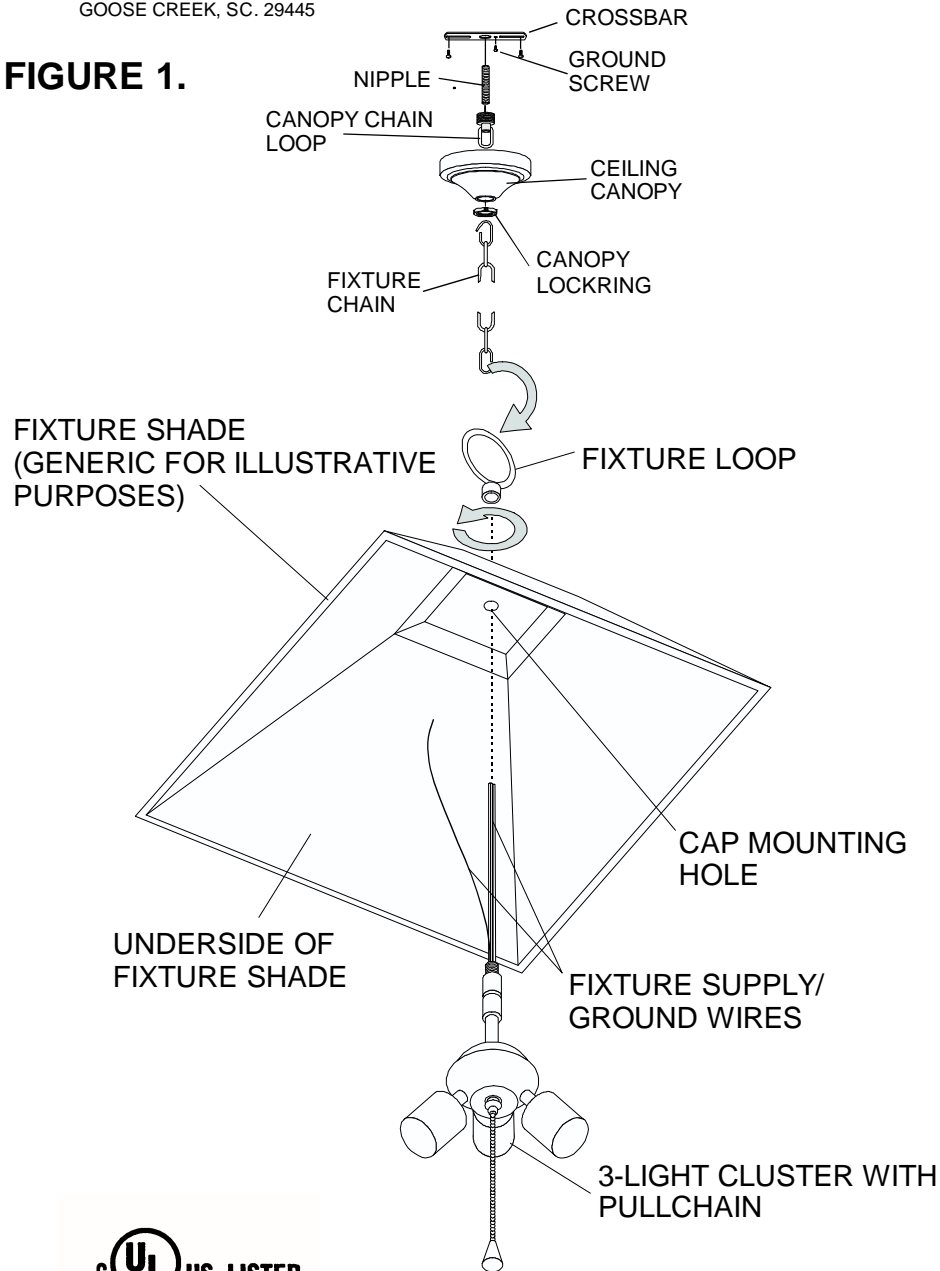

FIXTURE ASSEMBLY AND INSTALLATION INSTRUCTIONS:

1. Before beginning installation carefully unpack and identify all parts referring to illustration FIGURE 1.
2. Locate the FIXTURE SHADE and 3-LIGHT CLUSTER with PULLCHAIN. Proceed to unravel the FIXTURE SUPPLY/GROUND WIRES attached to the cluster.
3. With the wire unraveled proceed to pass through the center of the CAP MOUNTING HOLE.
4. Locate the FIXTURE LOOP and pass wire through the threaded center hole.
5. Proceed to secure the 3-LIGHT CLUSTER with PULLCHAIN the inside of the FIXTURE SHADE. Do this by passing the NIPPLE at the top of the cluster through the CAP MOUNTING HOLE. Thread the FIXTURE LOOP onto the NIPPLE. Tighten until snug.

(QUOIZEL recommends (2) people for the following steps !!!)

6. With the FIXTURE to the side, proceed to locate the CROSSBAR and attach the ceiling mounted outlet box using (2) OUTLET BOX SCREWS (not supplied). Locate the NIPPLE and thread it into the center of the CROSSBAR.
7. Locate the FIXTURE CHAIN, CEILING CANOPY, CANOPY CHAIN LOOP and CANOPY LOCKRING. Pass the SUPPLY and GROUND wires through in the following order: 1) Alternate loops in the FIXTURE CHAIN 2) CANOPY LOCKRING, 3) CANOPY CHAIN LOOP, 4) CEILING CANOPY. Finally, proceed to pass the wires through the NIPPLE attach to the CROSSBAR.
8. **Making the connections:** With power to the installation point OFF, connect the HOUSE GROUND WIRE to the FIXTURE GROUND WIRE and secure to the CROSSBAR with GROUND SCREW. Connect the HOUSE WHITE WIRE and the FIXTURE WHITE (or RIBBED SIDE) wire; Connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH SIDE) WIRE using wire connectors (not supplied by Quoizel).
9. Carefully tuck all of the wiring into the OUTLET BOX. Thread the CANOPY CHAIN LOOP onto the NIPPLE attached to CROSSBAR. Locate the CEILING CANOPY over the OUTLET BOX and secure by threading the LOCKRING onto the CANOPY CHAIN LOOP.
10. With someone else holding the FIXTURE, proceed to attach the top of the FIXTURE CHAIN to the CANOPY CHAIN LOOP and the bottom of chain to the FIXTURE LOOP. Carefully compress FIXTURE CHAIN with pliers to secure.
11. Install bulbs, checking fixture markings and/or labels for maximum wattage.
12. Restore electrical power to the installation point.

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN!