


QUOIZEL

6 CORPORATE PARKWAY
GOOSE CREEK, SC. 29445
www. quoizel. com

INSTALLATION INSTRUCTIONS

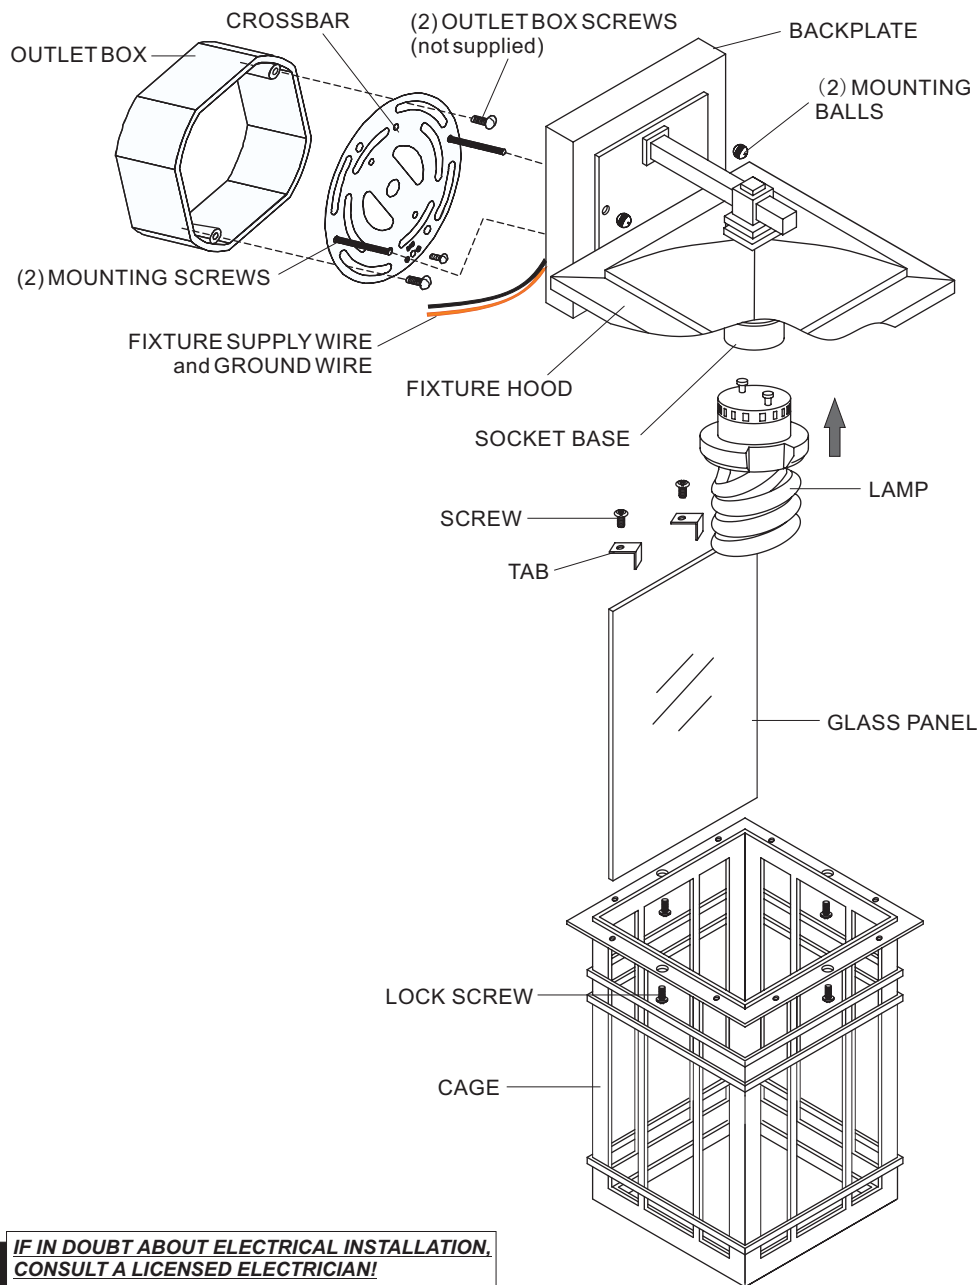

1. Before beginning the installation, carefully unpack and identify all parts, referring to the illustration.
2. Turn the electrical power to installation point OFF at the circuit breaker.
3. Slip down the GLASS PANEL to the inside of the CAGE. Locate the TABS onto the top edge of the GLASS PANEL and match the holes on them with the MOUNTING HOLES on the top edge of the CAGE. Use screw driver, thread the SCREWS into the MOUNTING HOLES and hand tighten until snug to secure the GLASS PANEL.
4. Lift the CAGE with the GLASS PANELS upward and align the holes on top edge of CAGE with mounting holes on the bottom edge of the FIXTURE HOOD. Secure them together by threading the LOCK SCREWS onto the mounting holes on the FIXTURE HOOD. Hand tighten until snug.
5. Place the CROSSBAR on the BACKPLATE and align the holes in the BACKPLATE with a set of threaded holes in the CROSSBAR. Install the (2) MOUNTING SCREWS in the aligned threaded holes on the CROSSBAR. Next, mount the CROSSBAR to the outlet box with (2) OUTLET BOX SCREWS(not provided).
6. **MAKING THE CONNECTIONS**: (Quoizel recommends 2 people for this step) Using wire connectors (not supplied) connect the HOUSE GROUND to the FIXTURE GROUND WIRE; attach the HOUSE WHITE WIRE to FIXTURE WHITE (or RIBBED SIDE) SUPPLY WIRE; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH SIDE) WIRE. Wrap each wire connect with approved electrical tape.
7. Carefully tuck all wires into the OUTLET BOX and align the fixture over the HOLES in the BACKPLATE with the (2) MOUNTING SCREWS attached to the CROSSBAR. Pass the fixture over the (2) MOUNTING SCREWS and secure it against the wall surface by threading (2) MOUNTING BALLS onto the end of each screw. Tighten until snug.
8. Install the Lamp into the Socket Base by aligning the pins on the Lamp with the keyholes in the Socket Base. Once they are aligned, gently push the Lamp into the keyholes and twist the Lamp to lock it in place.
9. Next, refer to page 2 for correct fixture caulking instructions.
10. Restore power back ON to the installation point. Retain this sheet for future reference.

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN!**



6 CORPORATE PARKWAY
GOOSE CREEK, SC. 29445
www. quoizel. com

WALL SURFACE MOUNTED OUTDOOR FIXTURE **CAULKING INSTRUCTIONS**

With the OUTDOOR FIXTURE properly installed in accordance with supplied assembly/installation instructions, proceed with caulking instructions below.

Note: Be sure EXTERIOR WALL SURFACE and FIXTURE BACKPLATE are free to dirt to caulking. Using EXTERIOR GRADE CAULK, start on one side of FIXTURE BACKPLATE and follow contour, were the FIXTURE BACKPLATE meets the EXTERIOR WALL SURFACE upward. Proceed to caulk over top of backplate and down other side. **DO NOT CAULK BOTTOM OF FIXTURE BACKPLATE** to ensure proper moisture drainage.

