




Incandescent

Step Light

Recessed

Type \_\_\_\_\_  
-30TG  
P6820

Catalog No.	Finish Black	Lamping	Dimensions (Inches)		
			A	B	C
P6820	-30TG	1-60w A19	8-5/8	5-7/8	3-1/2
			Wall Opening = 5x7-5/8		

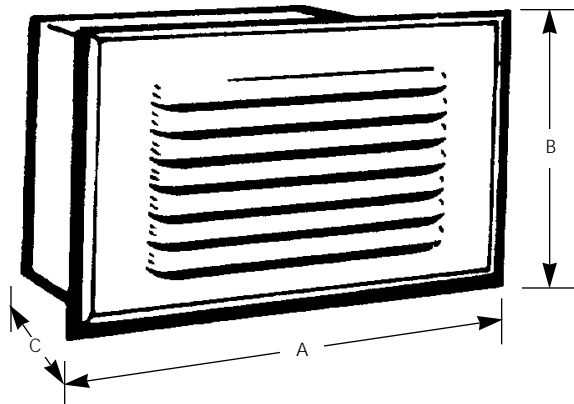

**Specifications:**

Louver

- White powder coated steel
- Linear baffles direct all light downward
- Gasketed for light leak prevention
- Fastens to housing with torsion springs

Electrical

- Medium base porcelain lampholder
- Multiple units can be wired together without the need of separate junction boxes

Housing

- White steel
- Interior wiring compartment
- Two 1/2" KO's for wiring
- For indoor and protected outdoor use
- Thermal guard protection, must be 3" from insulation in stud walls
- Mounting clips for direct mounting to wall board are provided
- Housing has brackets to accept P8716-01 hanger bars, if required

Labeling

- UL-CUL damp location listed

Progress Lighting  
Post Office Box 5704  
Spartanburg, South Carolina  
29304-5704

www.progresslighting.com