


Type _____

	-30	-31
P7375	<input type="checkbox"/>	<input type="checkbox"/>
P7376	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	White	Black		A	B
P7375	-30	-31	2-7w Twin CF	9	3-1/4
P7376	-30	-31	2-13w Twin CF	11	3-1/4

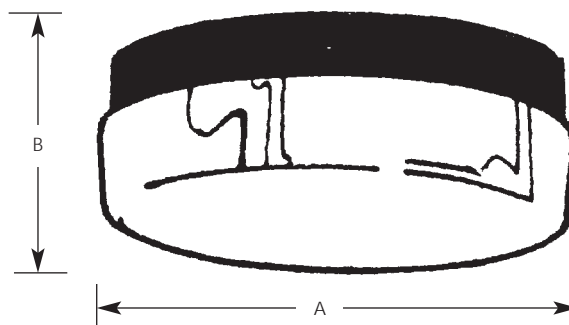

Specifications:

General

- White acrylic diffuser
- Twist on installation with a single locking thumb screw
- White (-30) or Black (-31) steel fitter pan
 - Interior white on both finishes
- ADA approved when wall mounted

Mounting

- Ceiling or wall mount
- Covers outlet box
- Outlet box mounting strap included
- Keyhole slots for easy fixture mounting

Electrical

- 120V NPF ballast
- P7376 only – HPF & 277V ballast option available
- P7375 – G23 base lamps
- P7376 – GX23 base lamps
- Pre-wired

Labeling


- UL-CUL damp location listed

Type _____

-30STR

P7375

Catalog No.	Finish	Lamping	Dimensions (Inches)	
			A	B
P7375	White -30STR	1 13w Quad CFL (4 Pin)	9	3-1/4

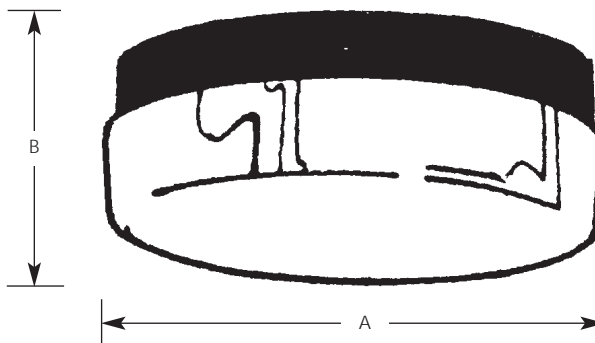

Specifications:

General

- White acrylic cloud diffuser
- Twist on installation with a single locking thumb screw
- White fitter pan
- Units comply with Energy Star requirements
- Complies with "Americans with Disability Act - ADA when wall mounted
- Steel construction

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL damp location listed

