


Type \_\_\_\_\_  
 -09 -30  
 P8516

| Catalog No. | Finish         |       | Dimensions (Inches) |       |   |
|-------------|----------------|-------|---------------------|-------|---|
|             | Brushed Nickel | White | A                   | B     | C |
| P8516       | -09            | -30   | 1-3/8               | 2-1/2 | 5 |

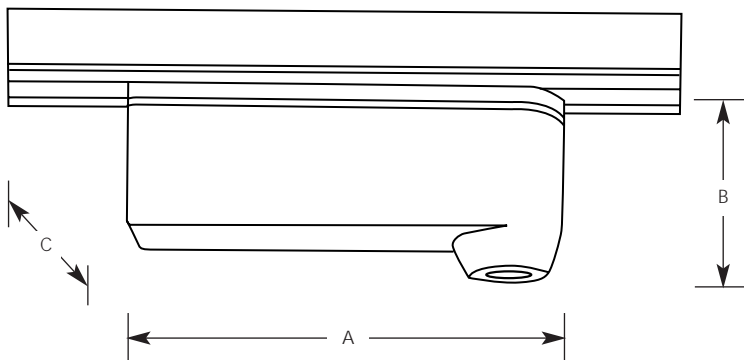

**Specifications:**

General

- Cast aluminum housing
- Brushed nickel plated finish or white painted
- Converts line voltage of track to 12 volts
- For use with low voltage mini pendants
- Utilizes a double contact bayonet EZ Loc system for quick lock up of components

Electrical

- 120 to 12 volt electronic transformer
- Transformer is potted for minimum noise, lowest heat and protection of components

Labeling

- UL-CUL listed

Mounting

- Attaches to Alpha track, or Track-1
- Quarter turn fastening to the track
- Can only be attached in proper position for correct polarity
- Transformer locks to track to prevent accidental removal