


| | | |
|-------|--------------------------|--------------------------|
| Type | _____ | |
| | -30 | -30ES |
| P7128 | <input type="checkbox"/> | |
| P7129 | <input type="checkbox"/> | |
| P7130 | <input type="checkbox"/> | |
| P7131 | <input type="checkbox"/> | |
| P7132 | | <input type="checkbox"/> |
| P7133 | | <input type="checkbox"/> |

| Catalog No. | Finish | | Lamping | Ballast | Dimensions (Inches) | | |
|-------------|--------|-------|----------|---------|---------------------|-------|---|
| | White | White | | | A | B | C |
| P7128 | -30 | | 1-F20T12 | NPF | 24-3/8 | 4-5/8 | 4 |
| P7129 | -30 | | 2-F20T12 | NPF | 24-3/8 | 4-5/8 | 4 |
| P7130 | -30 | | 1-F30T12 | NPF | 36-3/8 | 4-5/8 | 4 |
| P7131 | -30 | | 2-F30T12 | HPF | 36-3/8 | 4-5/8 | 4 |
| P7132 | | -30ES | 1-F34T12 | HPF | 48-3/8 | 4-5/8 | 4 |
| P7133 | | -30ES | 2-F34T12 | HPF | 48-3/8 | 4-5/8 | 4 |

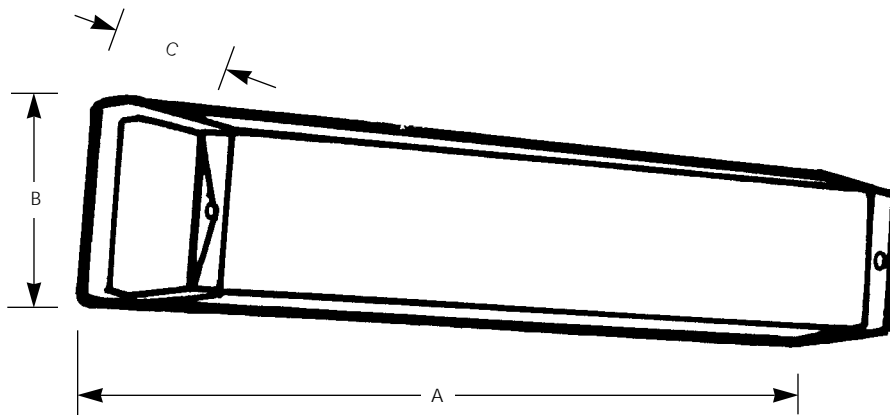

Specifications:

General

- Ribbed white acrylic diffuser
- Removable white plastic end caps permit replacement and cleaning
- Can be mounted horizontally or vertically
- Complies with "Americans with Disabilities Act"

Electrical

- Bi-pin twist-in sockets
- 120V NPF or HPF one or two lamp ballasts (see above) (277V available on request)

Labeling


- UL-CUL listed

Housing

- White chassis complete with ends
- Cover plate
- 1/2" KO in back center, and one near each end for wiring
- Keyhole KO's on back near each end for mounting
- 2-3/4" width covers a standard switch outlet box

Type _____
-30EB
P7129

| Catalog No. | Finish White | Lamping | Dimensions (Inches) | | |
|-------------|-----------------|---------|---------------------|-------|---|
| | | | A | B | C |
| P7129 | -30EB* | 2-F17T8 | 29-3/8 | 4-5/8 | 4 |

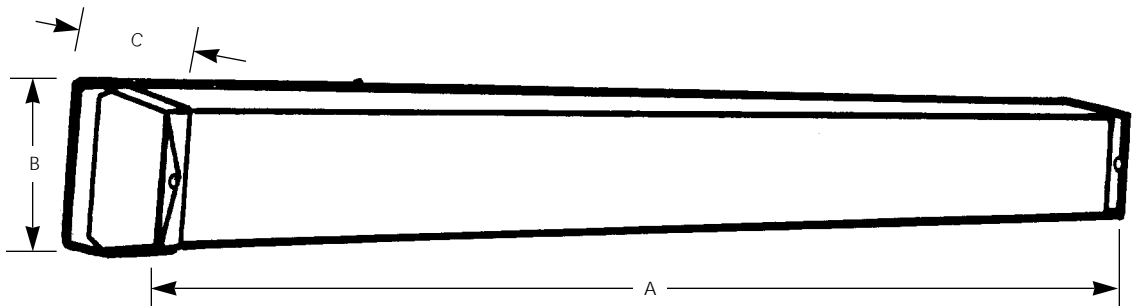

Specifications:

General

- Ribbed white acrylic diffuser
- Removable white plastic end caps permit lamp replacement and cleaning
- Can be mounted horizontally or vertically
- Complies with "Americans with Disabilities Act"

Housing

- White chassis complete with ends
- Cover plate
- 1/2" KO in back center, and one near each end for wiring
- Keyhole KO's on back near each end for mounting
- 2-3/4" width covers a standard switch outlet box

Electrical

- Bi-pin twist-in sockets for T8 lamps
- 120V electronic HPF two lamp ballasts (277V available on request)

Labeling

- UL-CUL listed

* Non-stocking