


Type \_\_\_\_\_

-30

P7372

P7373

Catalog No.	Finish White	Lamping	Dimensions (Inches)	
			A	B
P7372	-30	1-22w & 1-32w	13-3/4	3-1/4
P7373	-30	1-32w & 1-40w	19	4-1/4

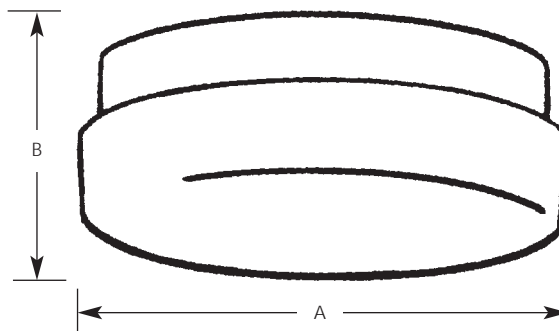

**Specifications:**

General

- White acrylic diffuser
- Twist on installation with a single locking thumb screw
- White steel fitter pan
- P7372 – ADA approved when wall mounted

Mounting

- Ceiling or wall mount
- Covers outlet box
- Outlet box mounting strap included
- Keyhole slots for easy fixture mounting

Electrical


- P7372 – 120v NPF rapid start ballast
- HPF ballast options available
- P7373 – 120v HPF rapid start ballast
- Pre-wired

Labeling

- UL-CUL damp location listed

Type \_\_\_\_\_  
 -30STR  
 P7372

Catalog No.	Finish	Lamping	Dimensions (Inches)	
			A	B
P7372	White -30STR	2 13w Quad CFL (4 Pin)	13-3/4	3-1/4

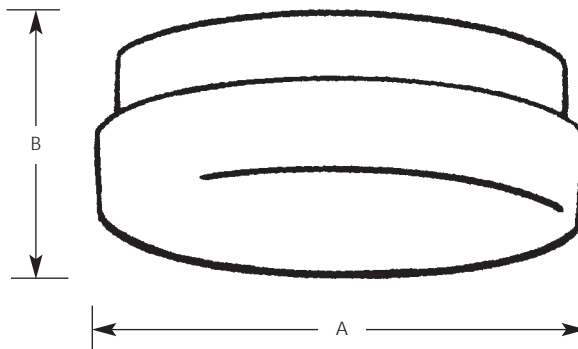

**Specifications:**

General

- White acrylic cloud diffuser
- Twist on installation with a single locking thumb screw
- White fitter pan
- Units comply with Energy Star requirements
- Complies with "Americans with Disability Act - ADA when wall mounted
- Steel construction

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL damp location listed

