

Type _____

-10 -30


P3732

P3733

P3734

P3735

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	White		A	B
P3732	-10	-30	2 (m) 60w	11	5-3/4
P3733	-10	-30	2 (m) 75w	12-1/2	6
P3734	-10	-30	3 (m) 60w	15	7
P3735	-10	-30	3 (m) 75w	19	7-1/2

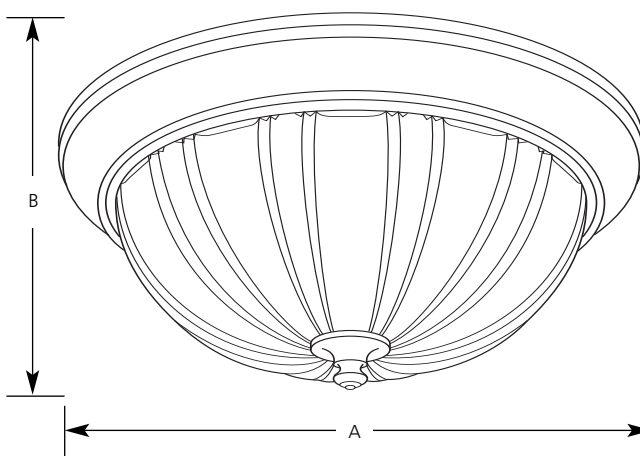

Specifications:

General

- Satin etched fluted glass
- Polished Brass (-10) or White (-30) finishes
- Steel construction
- Fiberglass insulated
- Companion chandeliers, foyer, sconce, semi-flush, pendant and bath and vanity units available

Electrical

- Requires 90-degree supply wire connection
- Medium based ceramic sockets
- Pre-wired

Labeling

- UL-CUL damp location listed

Mounting

- Ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy mounting

P3734

PRESCOTT - FLUSH MOUNT



Report No. 2000038

No. Lamps: 3 Type Lamp: 60A19 GE Total Lumens: 2595

Fixture Efficiency: 53.1%


S/MH Ratio: 1.3

Quick Calculator Charts

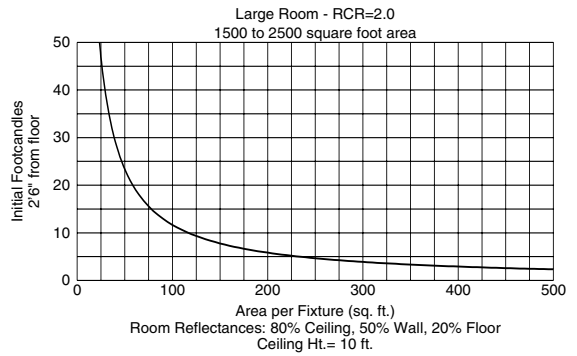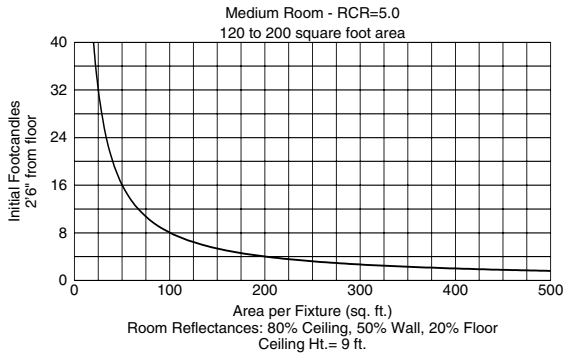

DISTRIBUTION CURVE

INTENSITY DATA

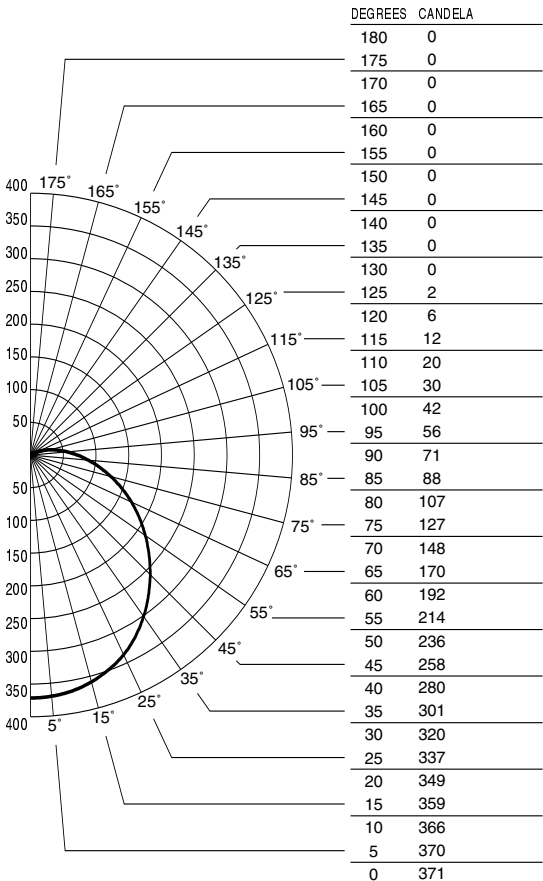

Single Fixture Data

Ceiling Ht. (Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112°			Beam Angle - 65°	
	Ft.-C	Beam Dia.	Ft.-C	Ft.-C	Beam Dia.
8	1.2	16	12.3	6.1	7
10	0.7	22	6.6	3.3	10
12	0.4	28	4.1	2.1	12
14	0.3	34	2.8	1.4	15
16	0.2	40	2.0	1.0	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	Effective Floor Cavity Reflectance 0.20																									
	80				70				50				30				10				0					
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0	62	62	62	62	60	60	60	60	57	57	57	53	53	53	50	50	50	49								
1	55	52	49	47	53	51	48	46	48	45	44	45	43	41	42	41	39	38								
2	50	45	41	37	48	43	40	36	41	38	35	38	36	33	36	34	32	31								
3	45	39	34	30	43	38	33	30	36	32	29	34	30	28	32	29	27	25								
4	41	34	29	25	40	33	29	25	31	27	24	30	26	23	28	25	23	21								
5	38	31	25	22	36	30	25	21	28	24	21	27	23	20	25	22	20	18								
6	35	27	22	19	34	27	22	19	25	21	18	24	20	18	23	20	17	16								
7	32	25	20	17	31	24	20	16	23	19	16	22	18	15	21	18	15	14								
8	30	23	18	15	29	22	18	14	21	17	14	20	16	14	19	16	13	12								
9	28	21	16	13	27	20	16	13	19	15	13	18	15	12	18	14	12	11								
10	26	19	15	12	25	19	14	12	18	14	11	17	14	11	16	13	11	10								

P3735

PRESCOTT - FLUSH MOUNT



Report No. 2000013

No. Lamps: 3 Type Lamp: 75A19 GE Total Lumens: 3570

Fixture Efficiency: 48.3%


S/MH Ratio: 1.3

Quick Calculator Charts

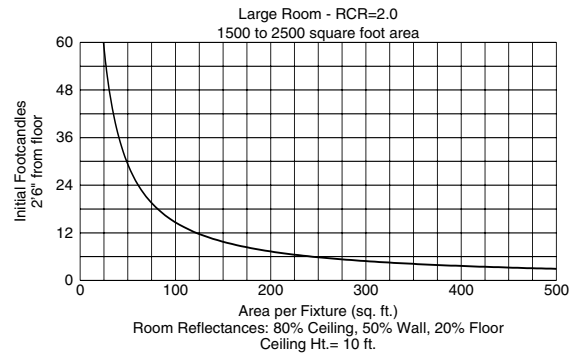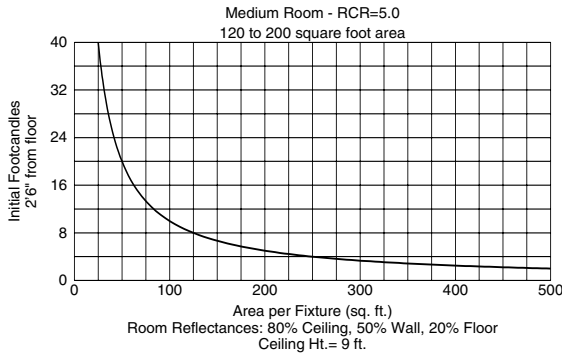

DISTRIBUTION CURVE

INTENSITY DATA

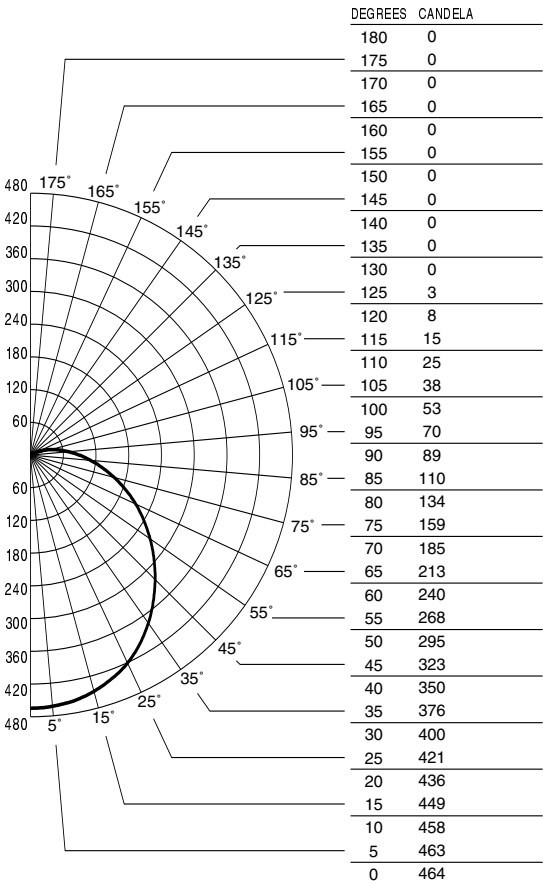

Single Fixture Data

Ceiling Ht. (Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112°			Beam Angle - 65°	
	Ft.-C	Beam Dia.	Ft.-C	Ft.-C	Beam Dia.
8	1.5	16	15.3	7.7	7
10	0.8	22	8.3	4.1	10
12	0.5	28	5.1	2.6	12
14	0.4	34	3.5	1.8	15
16	0.3	40	2.5	1.3	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	Effective Floor Cavity Reflectance 0.20																						
	80				70				50				30				10				0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	57	57	57	57	55	55	55	55	52	52	52	49	49	49	46	46	46	45	45	45	45		
1	50	48	45	43	49	46	44	42	43	41	40	41	39	38	38	37	36	35	35	35	35		
2	45	41	37	34	44	40	36	33	37	34	32	35	33	30	33	31	29	28	28	28	28		
3	41	35	31	28	39	34	30	27	32	29	26	30	28	25	29	26	24	23	23	23	23		
4	37	31	27	23	36	30	26	23	29	25	22	27	24	21	25	23	21	19	19	19	19		
5	34	28	23	20	33	27	23	19	26	22	19	24	21	18	23	20	18	17	17	17	17		
6	32	25	20	17	30	24	20	17	23	19	16	22	18	16	21	18	16	14	14	14	14		
7	29	23	18	15	28	22	18	15	21	17	14	20	17	14	19	16	14	13	13	13	13		
8	27	21	16	13	26	20	16	13	19	15	13	18	15	13	17	14	12	11	11	11	11		
9	25	19	15	12	25	18	14	12	18	14	12	17	14	11	16	13	11	10	10	10	10		
10	24	17	13	11	23	17	13	11	16	13	10	15	12	10	15	12	10	9	9	9	9		