


Type _____
-30EB
P7196

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7196	-30EB	4-F32T8	15-5/8	48	3

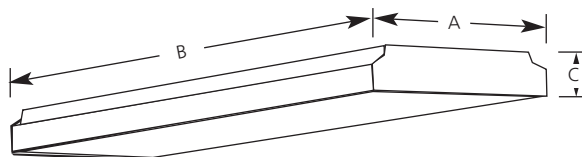

Specifications:

General

- Clear extruded prismatic acrylic wrap around lens
- Lift and shift removal of lens for relamping and servicing
- Regressed reveal gives floating effect
- Squared white metal end caps
- White steel chassis
- Sockets metal backed
- Easily removable cover for ballast access
- Utilizes T8 lamps for electronic ballasts

Mounting

- Ceiling mounted, individual or continuous run
- Covers any outlet box

Electrical

- 120V HPF electronic ballasts (277V available on request)
- Bi-pin twist in lamp holders


Labeling

- UL-CUL listed



Type _____
-30ES
P7196

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7196	-30ES	4-F34T12	15-5/8	48	3

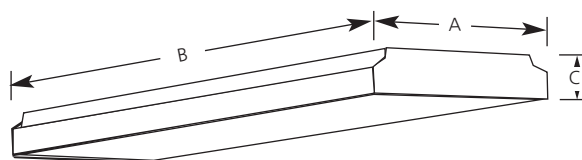

Specifications:

General

- Clear extruded prismatic acrylic wrap around lens
- Lift and shift removal of lens for relamping and servicing
- Regressed reveal gives floating effect
- Squared white metal end caps
- White steel chassis
- Sockets metal backed
- Easily removable cover for ballast access
- Recommend energy saving T12 lamps

Mounting

- Ceiling mounted, individual or continuous run
- Covers any outlet box

Electrical

- 120V HPF electronic ballasts (277V available on request)
- Bi-pin twist in lamp holders
- Parallel lamp operation

Labeling

- UL-CUL damp location listed