



SPECIFICATION GUIDE

ITEM # **PS 5** NEW _____ REVISION _____

ITEM DESCRIPTION: 5" UNIVERSAL IC / NON-IC
AIR SEAL RECESSED HOUSING

INDIVIDUAL PACK DIMENSIONS:

L x W x D: 21 1/2 X 15 X 16
 WEIGHT: _____
 CUBIC FT.: 0.38
 STD.PK.: 8

MASTER PACK DIMENSIONS:

L x W x D: _____
 WEIGHT: _____
 CUBIC FT.: _____
 STD.PK.: _____

PRODUCT DIMENSIONS:

DEPTH: <u>7 1/2</u>	SWITCH: <u>NO</u>
WIDTH: <u>6</u>	TYPE OF SW.: <u>--</u>
LENGTH: <u>9 1/2</u>	CONV. OUTLET: <u>NO</u>
EXT. FROM WALL: _____	KNOCKOUTS: <u>YES</u>
HT. CNTR OF OUTLET BOX: _____	TYPE OF K.O.: <u>(5) CONDUIT</u>
CHAIN LENGTH: _____	<u>(4) ROMEX</u>
WIRE LEAD LENGTH: <u>6 (min)</u>	

LAMPS:

QUANTITY: 1
 TYPE: MEDIUM BASE
 MAX WATT: 75 IC or NON-IC (SEE TRIM CORRELATION)
 RECOMMENDED LAMP: BR, R, PAR (SEE TRIM CORRELATION)


PRODUCT CONSTRUCTION:

METAL PARTS	MATERIAL	FINISH
WRAP	ALUM.	NONE
PLASTER FRAME, J-BOX	GALV. STEEL	NONE
BAR HANGERS	GALV. STEEL	NONE

GLASS PARTS	TYPE OF GLASS	FINISH	FITTER SIZE	REPLCMNT GLASS

OTHER PARTS	MATERIAL
SOCKET	PORCELAIN w/ NICKEL PLATED COPPER
	SCREW SHELL

NOTES CONSULT CATALOG FOR COMPLETE TRIM SELECTION.
 THERMALLY PROTECTED. UL LISTED FOR USE WITH OR WITHOUT
 DIRECT CONTACT WITH THERMAL INSULATION.
 UL LISTED FOR DAMP LOCATIONS AND THROUGH BRANCH
 CIRCUIT WIRING.

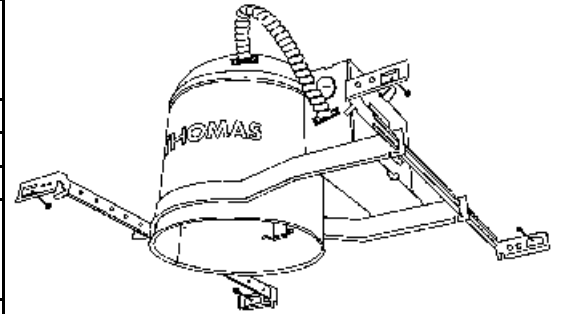

U.P.C.
0 20389 16052 2

FEATURES & BENEFITS

HOUSING IS SHIPPED AS SUITABLE FOR DIRECT CONTACT WITH INSULATION. CONVERT TO NON-IC APPLICATION BY REMOVING ONE LABEL.

HOUSING IS APPROVED BY THE WASHINGTON STATE ENERGY CODE WITHOUT ANY ADDITIONAL GASKETS.

INTERLOCKING BAR HANGERS ADJUST FOR JOIST CENTERS FROM 16" TO 24". BAR HANGERS INCLUDE PRE-POSITIONED NAILS FOR FAST, SECURE MOUNTING. ALSO SUITABLE FOR T-GRID CEILINGS.

PROVIDED WITH ADJUSTABLE SOCKET PLATE FOR CONSISTENT LAMP PLACEMENT. SOCKET PLATE MAY BE REMOVED FOR USE WITH ADJUSTABLE OR ENCLOSED TRIMS.

JUNCTION BOX INCLUDES INTEGRAL ROMEX STRAIN RELIEF. DOOR IS HINGED TO PREVENT ACCIDENTAL LOSS.

INCLUDES DETAILED INSTRUCTION SHEET AND PLASTER SHIELD TO PROTECT INSIDE OF HOUSING DURING PAINTING.