



Family: Raley | Item No. 1606 MB


▼ start here




Drawing 1 - Strap Detail

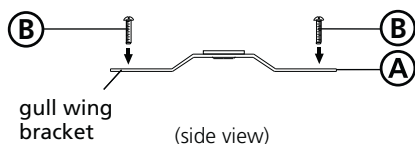

Drawing 2 - Fixture Mounting

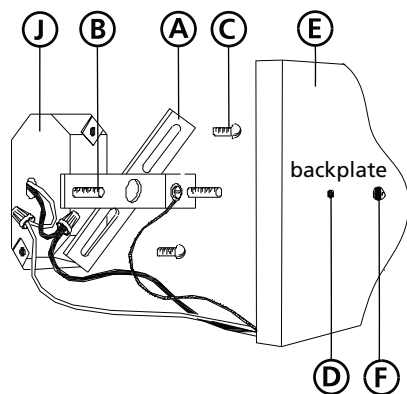

Drawing 3 - Fixture Assembly

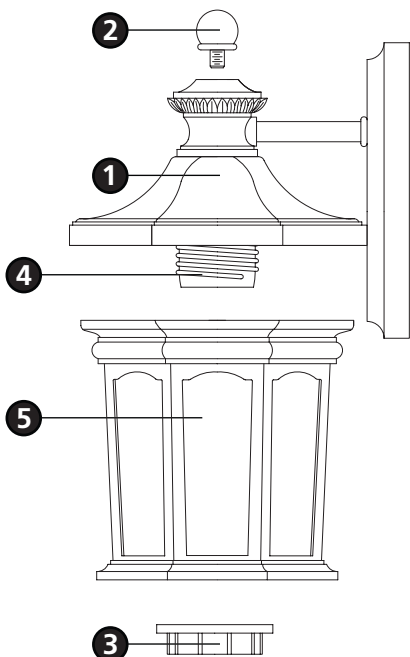

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the fixture, installing the mounting hardware, making all necessary electrical connections, and then mounting the fixture.**

2

1. To assemble fixture, thread ball knob **(2)** onto top of main fixture body **(1)** - see **Drawing 3**.
2. Remove socket ring **(3)** from socket **(4)**.
3. Slip cage assembly **(5)** over socket **(4)** and hold in position.
4. Thread socket ring **(3)** onto socket **(4)** to secure cage assembly.

3

1. Prepare mounting strap **(A)** by threading the two 1 1/4" long mounting screws **(B)** into the back of the gull wing bracket - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes **(D)** in the back plate **(E)** - see **Drawings 1 and 2**.
2. Attach mounting strap **(A)** to junction box **(J)** using two 1" screws **(C)** - see **Drawing 2**.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. Slide backplate **(E)** over screws **(B)** and secure with ball knobs **(F)** - see **Drawing 2**.
2. Fixture can now be lamped accordingly.

GLASS REPLACEMENT INSTRUCTIONS

1. Remove lamp from fixture and remove socket ring **(3)** from socket **(4)**.
2. Remove cage assembly **(5)** from main body **(1)**.
3. To replace glass, remove ball knob **(2)** from studs **(5)** - see **Drawing 3**.
4. Slip the cage assembly **(3)** off of the fixture roof **(6)**.
5. Remove glass clips inside of cage and take out broken glass.
6. Replace glass and follow steps 1-3 in reverse order to reassemble fixture.

Note: Maximum wattage for 1606 fixture is 60 watts per bulb.