


Drawing 1 - Fixture Assembly

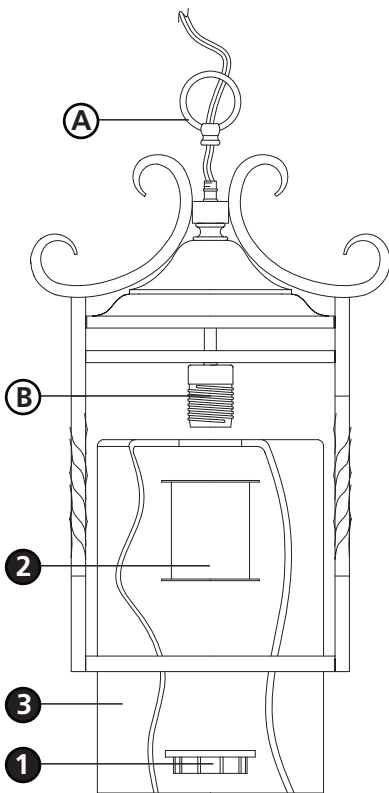

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first making all necessary electrical connections, hanging the fixture from the ceiling and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble fixture, slip loop **(A)** along wire and thread onto top of fixture.

3

1. Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. Please refer to the hanging instruction sheet **(I.S. 19)** provided to continue installation of this fixture. Then refer back to this sheet to install glass.

5

1. To install glass, grip spacer **(2)** and remove threaded socket ring **(1)** from socket **(B)**. Once ring **(1)** is removed spacer **(2)** will slip off socket **(B)**.
2. Slip glass **(3)** over socket **(B)** and hold in place.
3. Slip spacer **(2)** over socket **(B)** and hold in place.
4. Thread socket ring **(1)** onto socket **(B)** and tighten.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 1142 fixture is 100 watts per bulb.

11.24.08