



Family: Elm | Item No. 1152 RB



Drawing 1 - Fixture Assembly

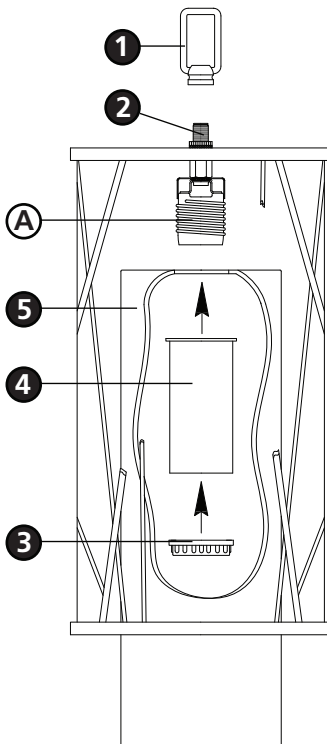

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Slip loop **(1)** along wire and thread onto threaded tubing **(2)** on top of fixture.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. Please refer to the hanging instruction sheet **(I.S. 19)** provided to continue installation of this fixture. Then refer back to this sheet to install glass.

5

1. To install glass, grip spacer **(4)** and remove threaded socket ring **(3)** from socket **(A)**. Once ring **(3)** is removed spacer **(4)** will slip off socket **(A)**.
2. Slip glass **(3)** over socket **(A)** and hold in place.
3. Slip spacer **(4)** over socket **(A)** and hold in place.
4. Thread socket ring **(3)** onto socket **(A)** and tighten.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 1152 fixture is 100 watts per bulb.

5.5.10