




Drawing 1 - Lamp Installation

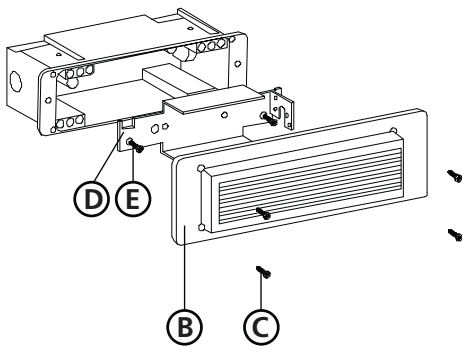

WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamps get hot quickly! Contact only switch/plug when turning on.
3. Do not touch hot lens, guard or enclosure.
4. Keep lamp away from material that may burn.
5. Do not operate luminaire fitting with a missing or damaged cover.

▼ start here

1

1. Find a clear area in which you can work.
 2. Carefully review instructions prior to assembly.
 3. Gather tools required : **WIRE STRIPPERS, PHILIPS HEAD SCREWDRIVER, SILICONE GREASE, THREAD SEALANT.**
- Save these instructions for future reference.

WARNING: LUMINAIRE MUST BE INSTALLED AND GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) AND LOCAL CODES. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY AND/ OR DAMAGE TO THE LUMINAIRE.

FIXTURES WHICH MAY COME IN CONTACT WITH OR BE EXPOSED TO MOISTURE (I.E. OUTDOORS) SHALL BE INSTALLED ON A GFI (GROUND FAULT INTERRUPTOR) POTECTED CIRCUIT.

ALWAYS USE UL RECOGNIZED WIRE CONNECTORS FOR CONNECTIONS.

2

1. Please refer to the **mounting instructions** located on the back of this sheet to continue installation of this fixture.

3

lamp installation | replacement

1. To prevent electrical shock, disconnect from the electrical supply before servicing.
2. Remove face plate (**B**) by loosening 4 philips screws (**C**) on front of louvre - see **Drawing 1**.
3. Remove electrical tray (**D**) by loosening 2 philips screws (**E**).
4. Replace lamp with correct wattage and type marked on fixture label.
CAUTION: DO NOT EXCEED MAXIMUM WATTAGE MARKED ON LUMINAIRE LABEL.


Info 59040 BZ: Lamp Type G9, Maximum Wattage is 40 watts per bulb.
Info 49009 BZ: Lamp Type G23-2, Maximum Wattage is 9 watts CFL per bulb.




mounting instructions

Family: 120V Series Brick Light | Item No. 59040/59009 BZ

Drawing 2 - Fixture Mounting

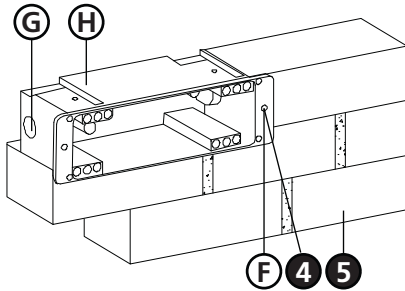

Drawing 3 - Fixture Mounting

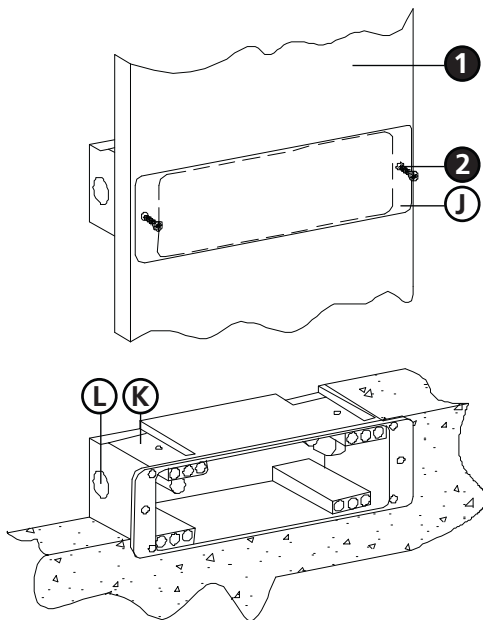

THERMAL PROTECTION IS NOT REQUIRED FOR MASONRY OR CONCRETE POUR INSTALLATIONS. THERMAL PROTECTION IS ALSO NOT REQUIRED FOR FLUORESCENT LAMPING SINCE RECESSED BRICKLIGHT BALLAST IS CLASS P AND CONTAINS THERMAL PROTECTION.

1

1. Determine which of the two mounting options are required and refer to the proper set of instructions below.

2

Masonry Wall Installation

1. Install fixture housing (**H**) into the masonry open hole dedicated for the brick light - see **Drawing 2**.
2. Drill two 1/8" pilot holes (**4**) into each side of the bricks (**5**) using the two 3/16" holes (**F**) in housing (**H**).
3. Remove the 1/2" NPT plugs (**G**) from the side and bottom of the housing and pull supply wires through holes and into housing (**H**).
4. Leaving 1/8" of housing extended past front of wall, press fixture firmly against the bricks and thread two 8-32 x 1 3/4" countersunk flat head philips lag screws (**5**) (not provided) into the 1/8" pilot holes (**4**).
5. Please refer back to the front of this sheet to install the lamp and complete installation of this fixture.

3

Concrete Pour Installation

1. Level supplied template (**F** (refer to second page for template)) on wood support frame (**1**) (not provided) and drill two 3/16" diameter clearance holes (**2**). Failure to level will cause fixture to have tilted appearance - see **Drawing 3**.
2. Remove the 1/2" NPT plugs (**L**) from the side and bottom of the housing (**K**) and pull the supply wires through the holes and into the housing (**K**).
3. Be sure all unused electrical plugs have been replaced. Using template (**F**), cut 1/8" deep outline into back of wood support (**1**).
4. Secure housing to wood support (**1**), with two 8-32 X 1 3/4" wood screws (**3**) not provided. Housing (**K**) must extend 1/8" past front of finished walls.
5. Pour concrete.
6. After concrete is dry, remove two screws (**3**) and wood support.
7. Please refer back to the front of this sheet to install the lamp and complete installation of this fixture.

mounting template

Family: 120V Series Brick Light | Item No. 59040/19009 BZ

