ADA DAMP

SPECIFICATIONS:

DESCRIPTION

1-5 light ADA compliant bathbars featuring handcrafted glass.

MOUNTING

Installs directly to a 4" octagonal outlet box, with up to 1" offset. Install in either horizontal or vertical position.

I AMPING

Standard is 50W G9 120V clear halogen lamps, supplied.

CONSTRUCTION

Rectangular canopy (4.75" \times 5.5" H) is plated stamped steel. The lampholders are stamped steel, on 0.5" square steel tubing, with plated finish.


DIFFUSER

Diffusers are circular shaped Opal glass. Diameter of 6.375", spaced 7.875" on center.

LABELS

UL listed. Suitable for Damp Locations (interior use only).







ORDERING:

		-	7	7	3	8	0	7	-			
Fixture			Glass Decor						Metal Finish			
1WS	1 Light		77	3807	7 0	pal		В	R B	ronz	е	_
2WS	2 Light		-					C	R C	hron	ne	
3WS	3 Light							S	N S	atin	Nicke	اد
4WS	4 Light							-				
5WS	5 Light											





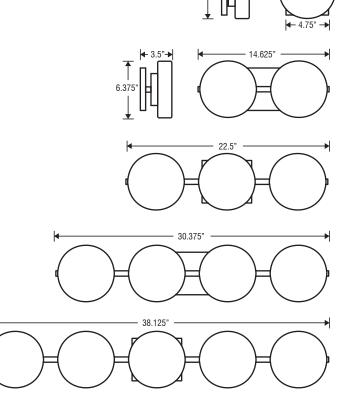



Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 10/08