

SPECIFICATIONS:

DESCRIPTION

Cord-hung midi pendant with handcrafted glass.

LAMPING

Standard lamping is 100W max A19. CFL: Standard 18W with non-dimming electronic ballast available on 1 Light dome canopy only. 120V SB-CFL: Self-ballasted 27W GU-24 type. 120V

Consult factory for other configurations. Lamps not included.

DIFFUSER

Shade shall be handcrafted glass of various decors. Diameter of 6.0" and height of 9.5"

CORD

Standard cord is 10' SVT-type, complete with 5" decorative sleeve at the socketholder. Cord color is Clear for Satin Nickel finish and Bronze for Bronze finish. Cords also available in 15' length. Additional 18" long cord sleeves may be ordered separately.

METAL FINISH

Canopy, Shade Fitter and Sleeve shall be finished in either Bronze or Satin Nickel.

CANOPY OPTIONS

Refer to back page for options. Available on 1, 3 or 6 light fixed-connect canopies.

MOUNTING


Installs directly to a 4" round or octagonal ceiling box. Suitable for sloped ceilings.


LABELS

UL listed. Suitable for Damp Locations (interior use only).



Fiero • Satin Nickel







For ordering information, see page back.


Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 11/08

Pera



CANOPY OPTIONS:

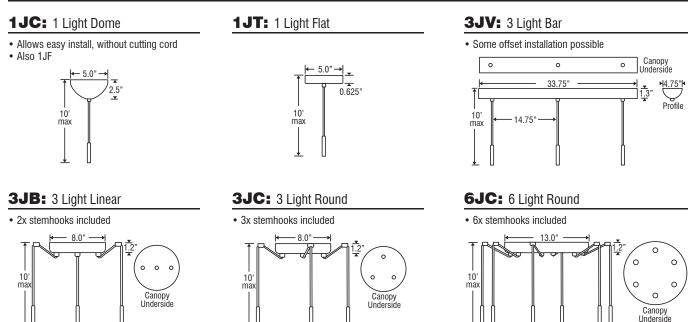

ORDERING:

				•_	
Canopy Style	Opt.	GI	ass Decor	Μ	etal Finish
1JC 1 Lt Dome	X GU24	412607	Opal Matte	BR	Bronze
1JT 1 Lt Flat	<i>max</i> 27W*	412618	Amber Cloud	SN	Satin Nickel
3JB 3 Lt Linear		412668	White Cloud		
3JC 3 Lt Round		4126CM	Cobalt Blue Matte		
3JV 3 Lt Bar		4126FC	Fiero		
6JC 6 Lt Round		4126GM	Armagnac Matte		
		4126HB	Habanero		
1 Lt Dome Std CFL		4126MA	Magma		
1JF 18W TBX		4126VM	Vanilla Matte		

METAL & CORD FINISHES:



Project Information:

Standard lamping is incandescent.

- To order with self-ballasted GU-24 CFL lampholders, add the option code where indicated.
- For 1 Lt. pendant with 4-pin CFL and non-dimming ballast in the dome canopy, order using a CFL canopy style as indicated.

*26W or 27W lamps may be provided