

location:
DAMP
interior

SPECIFICATIONS:

DESCRIPTION

Cable-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

Standard is 150W A21 120V incandescent, suitable for dimming.

CFL: 26W 4-Pin CFL with non-dimming electronic ballast. 120V.

SB-CFL: Self-ballasted GU-24 lampholders. 27W max, 120V.

Lamps not included.

DIFFUSER

Shade shall be handcrafted glass in various decors.

Diameter of 14.5" and height of 11.375"

SUSPENSION

Cable-hung: 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket tint coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.



477507
Opal Matte

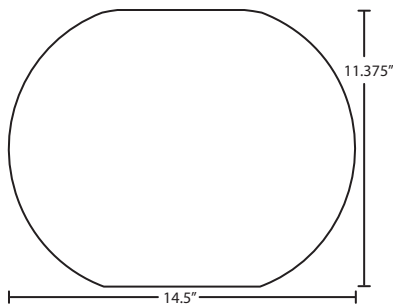

477519
Carrera



477599
Opal-Frost



4775VM
Vanilla Matte



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10


ORDERING:

| 1x Cable Fixture | Decor | Lamping | Metal Finish |
|---------------------------|-----------------------------|---------------------------|------------------------|
| 1KX 1 Lt. Dome | 477507 Opal Matte | () 150W A21 Incand. | BR Bronze |
| | 477519 Carrera | H1 1x 26W TBX | SN Satin Nickel |
| Stem Fixture | 477599 Opal-Frost | X1 27W GU-24 max | |
| 1TC 1 Lt. CFL Dome | 4775VM Vanilla Matte | <i>H1 on 1KX/1TC only</i> | |
| 1TT 1 Lt. Flat | | | |

PENDANT OPTIONS:


Cable-hung

- 1x Cable, 1x Lampholder
- Suitable for sloped ceilings



Stem-mount Options

- Flat style for incandescent, Dome style for CFL
- Swivel at canopy, suitable for sloped ceilings
- Includes 4 connectable sections (1x 3", 1x 6", 1x 12", 1x 18") plus telescoping piece for up to 3" adjustment

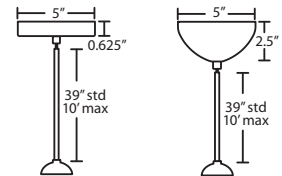

Project Information:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to a maximum 10'.

- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section