

location:
DAMP
interior

SPECIFICATIONS:

DESCRIPTION

Cord-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

Standard is 75W A19 120V incandescent, suitable for dimming.

CFL: 18W 4-Pin CFL with non-dimming electronic ballast. 120V.

SB-CFL: Self-ballasted GU-24 lampholders. 18W max, 120V.

Lamps not included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

6.25" Dia. x 7.25" H

SUSPENSION

Cord-hung: 10' SVT-type cord, complete with 5" decorative sleeve at the sockholder. Jacket coordinates with metal finish. Available on 1, 3 or 6 light canopies, shown on next page. Plated stamped steel construction. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage

labeling for energy requirements.



Glass:



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10

ORDERING:

| Cord Fixture | Decor | Lamping | Metal Finish |
|----------------------------|-----------------------------|----------------------------------|------------------------|
| 1JC 1 Lt. Dome | 169707 Opal Matte | () 100W A19 Incand. | BR Bronze |
| 1JT 1 Lt. Flat | 169718 Amber Cloud | F1 1x 18W TBX | SN Satin Nickel |
| 3JB 3 Lt. Linear | 169719 Carrera | W* 18W GU-24 max | |
| 3JC 3 Lt. Round | 169741 Garnet | <i>F1 avail. on 1JC/1TC only</i> | |
| 3JV 3 Lt. Bar | 169780 Amber Matte | <i>*Lamp QTY</i> | |
| 3JW 3 Lt. Lrg. Rnd. | 169786 Blue Cloud | | |
| 6JC 6 Lt. Round | 1697CE Ceylon | | |
| | 1697HN Honey | | |
| <u>Stem Fixture</u> | 1697HV Halva | | |
| 1TC 1 Lt. CFL Dome | 1697VM Vanilla Matte | | |
| 1TT 1 Lt. Flat | | | |

CORD SLEEVES:
If concealing the cord is desired, order our 0.25" dia. metal sleeves. Each sleeve is 18" long and may be field cut.

T118-SN Satin Nickel
T118-BR Bronze

ADDITIONAL STEM SECTIONS:
Additional connecting stems are available to increase overall length, up to a maximum 10'.


T203-SN or **T203-BR** 3" Section
T206-SN or **T206-BR** 6" Section
T212-SN or **T212-BR** 12" Section
T218-SN or **T218-BR** 18" Section

Project Information:

PENDANT OPTIONS:


1 Light Canopy

- Dome style (allows install without cutting cord), or Flat style




3 Light Round Canopy

- 3x stemhooks included

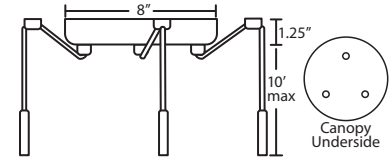


3 Light Linear Canopy

- 2x stemhooks included

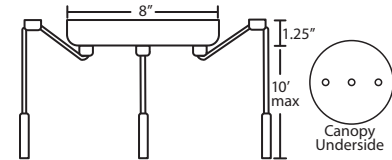


3 Light Large Round Canopy

- 3x stemhooks included

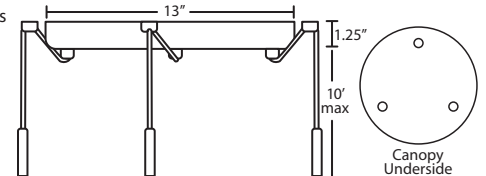


3 Light Bar Canopy

- Some offset installation possible

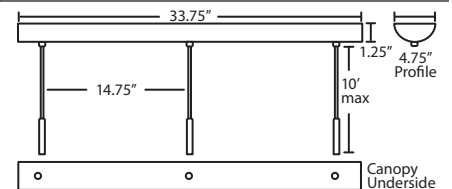

6 Light Round Canopy

- 6x stemhooks included

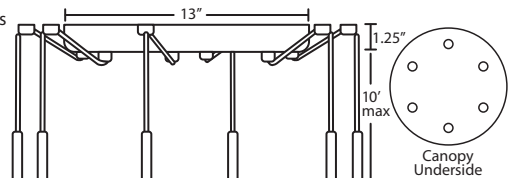

Stem Pendant

- Flat style for incandescent, Dome style for CFL
- Swivel at canopy, suitable for sloped ceilings
- Includes 4 connectable sections (1x 3", 1x 6", 1x 12", 1x 18") plus telescoping piece for up to 3" adjustment

