

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass. "Slim" design features a low profile pan specifically for CFL lamps. Three sizes available.

LAMPING

CFL: Standard 4-Pin CFL with non-dimming electronic ballasts.
SB-CFL: Self-ballasted GU-24 lampholders. 13W max.
 Consult factory for other CFL configurations. Lamps not included.

DIFFUSER

Handcrafted glass diffuser is available in Opal Glossy/Clear decor.

CONSTRUCTION

Glass diffuser is secured to fitter with "twist & lock" bayonet action. Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.


LABELS

UL or ETL Listed. Suitable for Damp Locations. Interior Use Only.



Opal Glossy/Clear

Luma 12 Slim: #9095

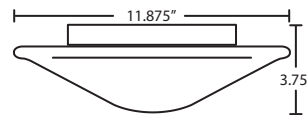

1	C	S	-	9	0	9	5	3	9	-	L
Fixture				Decor						Lamping	
1CS 1 Light				909539 Opal Glossy/Clear						D1 1x 13W Quad 120V	
										M1 1x 13W Quad 277V	
										V1 1x 13W GU-24 120V	

Luma 14 Slim: #9096




2	C	S	-	9	0	9	6	3	9	-	L
Fixture				Decor						Lamping	
2CS 1 Light				909639 Opal Glossy/Clear						D2 2x 13W Quad 120V	
										M2 2x 13W Quad 277V	
										V2 2x 13W GU-24 120V	

Luma 18 Slim: #9097



3	C	S	-	9	0	9	7	3	9	-	L
Fixture				Decor						Lamping	
3CS 1 Light				909739 Opal Glossy/Clear						H2 2x 26W Quad 120V	
										Q2 2x 26W Quad 277V	
										V3 3x 13W GU-24 120V	

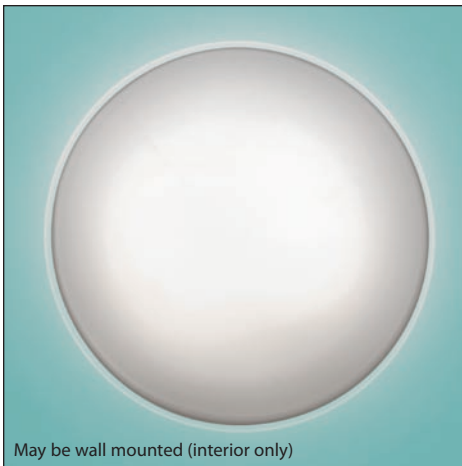

May be wall mounted (interior only)



Edge detail

Project Information:

All dimensions provided are nominal.
 Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10