

location:  
**DAMP**  
interior

## SPECIFICATIONS:

### DESCRIPTION

Cord-hung or stem-mount pendant with handcrafted glass diffuser.

### LAMPING

Standard is 100W A19 120V incandescent, suitable for dimming.

**CFL:** 18W 4-Pin CFL with non-dimming electronic ballast. 120V.

**SB-CFL:** Self-ballasted GU-24 lampholders. 27W max, 120V.

Lamps not included.

### DIFFUSER

Shade shall be handcrafted glass of various decors.

10.625" Dia. x 8.25" H

### SUSPENSION

**Cord-hung:** 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Available on 1, 3 or 6 light canopies, shown on next page. Plated stamped steel construction. Bronze or Satin Nickel.

**Stem-mount:** 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.


### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.



Glass:



**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10

## ORDERING:


Cord Fixture	Decor	Lamping	Metal Finish
<b>1JC</b> 1 Lt. Dome	<b>477607</b> Opal Matte	( ) 100W A19 Incand.	<b>BR</b> Bronze
<b>1JT</b> 1 Lt. Flat	<b>477619</b> Carrera	<b>F1</b> 1x 18W TBX	<b>SN</b> Satin Nickel
<b>3JB</b> 3 Lt. Linear	<b>477699</b> Opal-Frost	<b>X*</b> 27W GU-24 max	
<b>3JC</b> 3 Lt. Round	<b>4776VM</b> Vanilla Matte	<i>F1 avail. on 1JC/1TC only</i>	
<b>3JV</b> 3 Lt. Bar		<i>*Lamp QTY</i>	
<b>3JW</b> 3 Lt. Lrg. Rnd.			
<b>6JC</b> 6 Lt. Round			

Stem Fixture
<b>1TC</b> 1 Lt. CFL Dome
<b>1TT</b> 1 Lt. Flat

## PENDANT OPTIONS:


### 1 Light Canopy

- Dome style (allows install without cutting cord), or Flat style

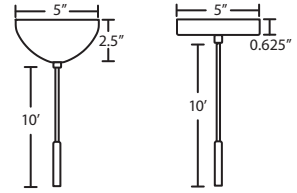


### 3 Light Round Canopy

- 3x stemhooks included

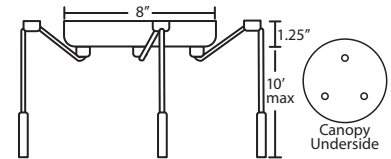


### 3 Light Linear Canopy

- 2x stemhooks included

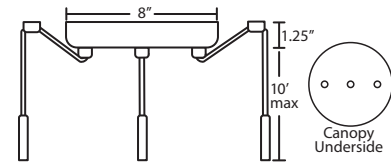


### 3 Light Large Round Canopy

- 3x stemhooks included

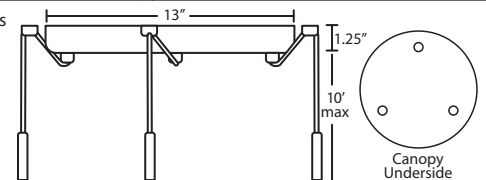


### 3 Light Bar Canopy

- Some offset installation possible

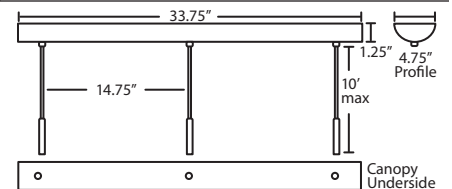


### 6 Light Round Canopy

- 6x stemhooks included

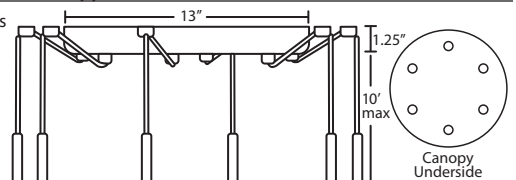

### Stem Pendant

- Flat style for incandescent, Dome style for CFL
- Swivel at canopy, suitable for sloped ceilings
- Includes 4 connectable sections (1x 3", 1x 6", 1x 12", 1x 18") plus telescoping piece for up to 3" adjustment



### CORD SLEEVES:

If concealing the cord is desired, order our 0.25" dia. metal sleeves. Each sleeve is 18" long and may be field cut.

**T118-SN** Satin Nickel  
**T118-BR** Bronze

### ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to a maximum 10'.

**T203-SN** or **T203-BR** 3" Section  
**T206-SN** or **T206-BR** 6" Section  
**T212-SN** or **T212-BR** 12" Section  
**T218-SN** or **T218-BR** 18" Section

### Project Information: