

location:  
**DAMP**  
interior

**SPECIFICATIONS:**

**DESCRIPTION**

Wall-mounted ADA-compliant sconce featuring open-ended handcrafted glass.

**LAMPING**

Standard is 75W A19 120V incandescent, suitable for dimming. (Note: Onyx requires 60W max.)

**CFL:** 18W 4-Pin CFL with non-dimming electronic ballast.

**SB-CFL:** Self-ballasted GU-24 lampholders. 18W max, 120V. Lamps not included.

**DIFFUSER**

Diffuser shall be handcrafted glass of various decors. Onyx is carved from natural stone.

**CONSTRUCTION**

Glass is secured to the backplate by braided wire. Rectangular backplate (nominal 4" W x 6.5" H) shall be constructed of steel, powder-coated white. Optional wireform cage is 0.125" dia. tubing with powder coat finish.

**METAL FINISH**

Decorative metal accents shall be in various finish options.

**MOUNTING**

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 4.25" above the outlet box centerline.

**LABELS**

UL or ETL Listed. Suitable for Damp Locations (interior use only).



7042GX-SN  
Onyx



704207  
Opal Matte





704219  
Carrera



7042HN  
Honey



7042CE  
Ceylon

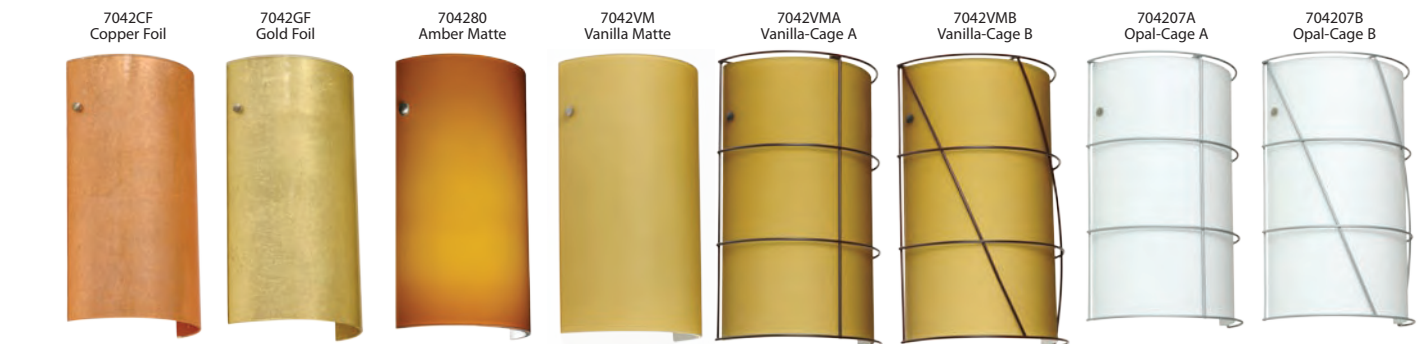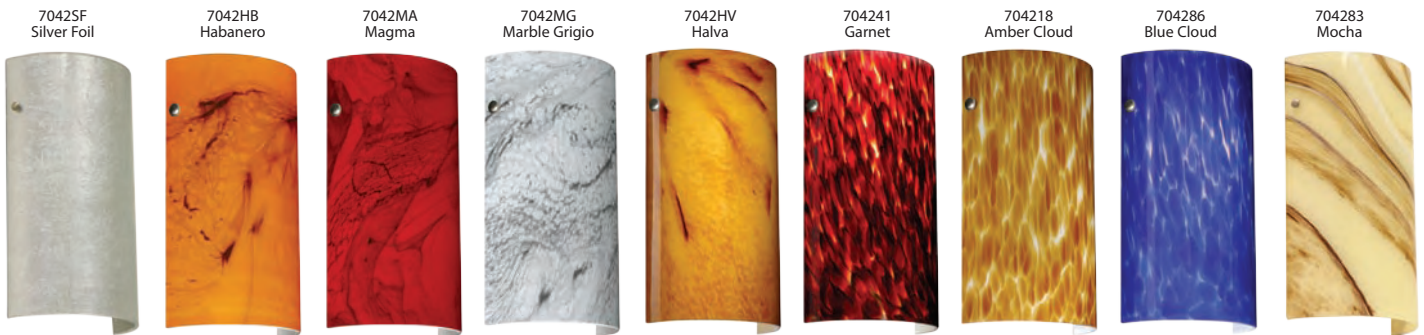

**For ordering information, see next page**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10

