

location:
DAMP
interior

SPECIFICATIONS:

DESCRIPTION

Cable-hung, cord-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

Standard is 150W A21 120V incandescent, suitable for dimming.

CFL: 26W 4-Pin CFL with non-dimming electronic ballast. 120V.

SB-CFL: Self-ballasted GU-24 lampholders. 27W max, 120V.

Lamps not included.

DIFFUSER


Shade shall be handcrafted glass in various decors. 6.0" dia. x 18.0" H
Optional wireform cage is 0.125" dia. tubing with powder coat finish.

SUSPENSION

Cable-hung: 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket tint coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

Cord-hung: 10' SJT-type cord. Jacket coordinates with metal finish. 5" Dia. canopy is stamped steel. Black or white powder-coat.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel

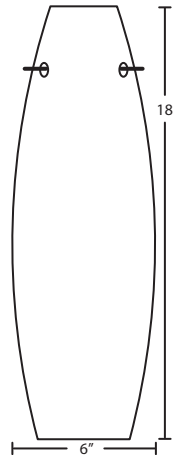


MOUNTING

Installs directly to a 4" octagonal ceiling box.
Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only). Consult factory concerning lower wattage labeling for energy requirements.

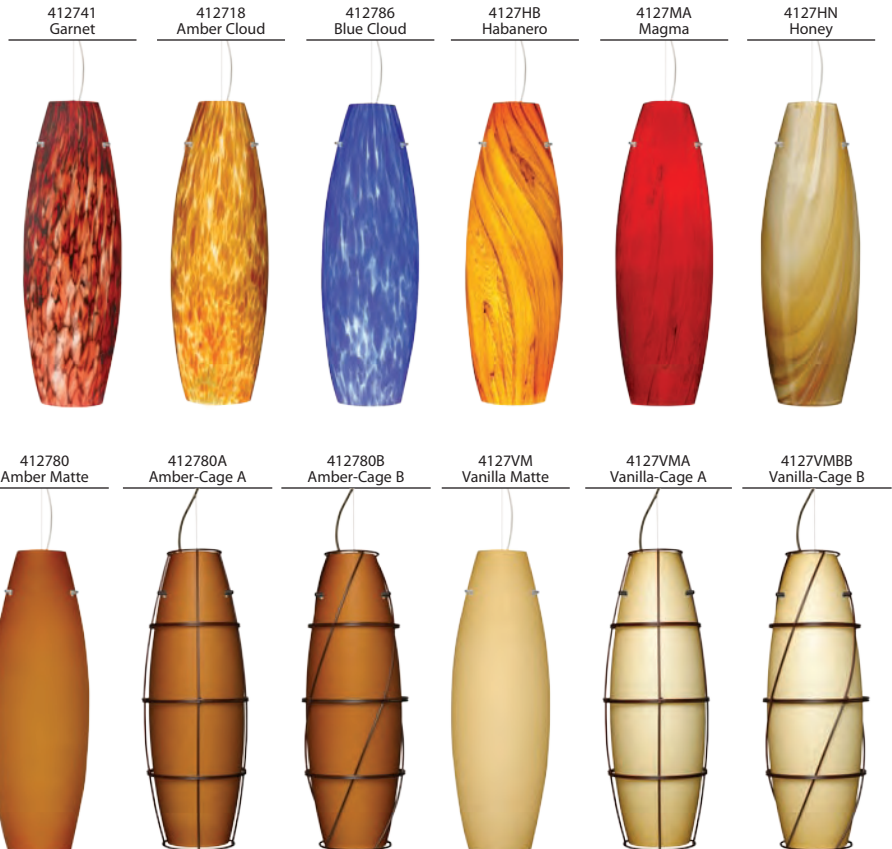

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/10


ORDERING:

<p><u>1x Cable Fixture</u> 1KX 1 Lt. Dome</p> <p><u>Stem Fixture</u> 1TC 1 Lt. CFL Dome 1TT 1 Lt. Flat</p> <p><u>Cord Fixture</u> 1VC 1 Lt. Dome 1VT 1 Lt. Flat</p>	<p><u>Decor</u> 412707 Opal Matte 412707A Opal-Cage A 412707B Opal-Cage B 412718 Amber Cloud 412719 Carrera 412741 Garnet 412780 Amber Matte 412780A Amber-Cage A 412780B Amber-Cage B 412786 Blue Cloud 4127CE Ceylon 4127HB Habanero 4127HN Honey 4127MA Magma 4127VM Vanilla Matte 4127VMA Vanilla-Cage A 4127VMB Vanilla-Cage B</p>	<p><u>Lamping</u> () 150W A21 Incand. H1 1x 26W TBX X1 27W GU-24 max <i>H1 on 1KX/1VC/1TC only</i></p>	<p><u>K/T Metal Finish</u> BR Bronze SN Satin Nickel</p> <p><u>V Metal Finish</u> BK Black WH White</p>
---	---	--	---

PENDANT OPTIONS:


Cable-hung

- 1x Cable, 1x Lampholder
- Suitable for sloped ceilings




Stem-mount Options

- Flat style for incandescent, Dome style for CFL
- Swivel at canopy, suitable for sloped ceilings
- Includes 4 connectable sections (1x 3", 1x 6", 1x 12", 1x 18") plus telescoping piece for up to 3" adjustment



Cord-hung Options

- Dome style or Flat style
- Suitable for sloped ceilings
- 10' SJT Cord
- Black or White finish



Project Information:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to a maximum 10'.

- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section