

SPECIFICATIONS:**DESCRIPTION**

Cord-hung midi pendant with handcrafted glass.

LAMPING

Standard lamping is 100W max A19.

CFL: Standard 18W with non-dimming electronic ballast available on 1 Light dome canopy only. 120V

SB-CFL: Self-ballasted 27W GU-24 type. 120V

Consult factory for other configurations. Lamps not included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

Diameter of 11.75" and height of 7.5"

CORD

Standard cord is 10' SVT-type, complete with 5" decorative sleeve at the socketholder. Cord color is Clear for Satin Nickel finish and Bronze for Bronze finish. Cords also available in 15' length. Additional 18" long cord sleeves may be ordered separately.

METAL FINISH

Canopy, Shade Fitter and Sleeve shall be finished in either Bronze or Satin Nickel.

CANOPY OPTIONS

Refer to back page for options. Available on 1, 3 or 6 light fixed-connect canopies.

MOUNTING


Installs directly to a 4" round or octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL listed. Suitable for Damp Locations (interior use only).



Opal Ribbed • Satin Nickel

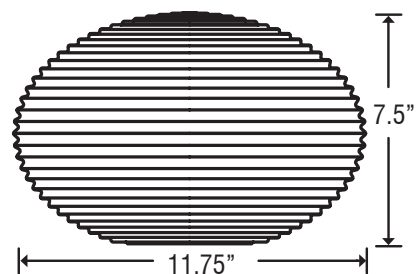

For ordering information, see page back.

Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 11/08

J Series 120V Midi Pendant: Pape




**DAMP
INTERIOR**


CANOPY OPTIONS:

1JC: 1 Light Dome

- Allows easy install, without cutting cord
- Also 1JF




1JT: 1 Light Flat




3JV: 3 Light Bar

- Some offset installation possible

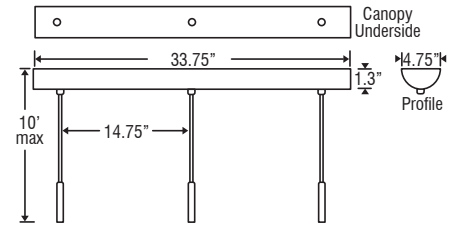


3JB: 3 Light Linear

- 2x stemhooks included

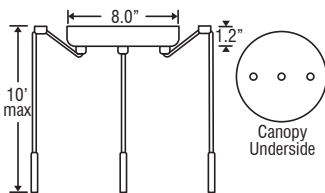


3JC: 3 Light Round

- 3x stemhooks included

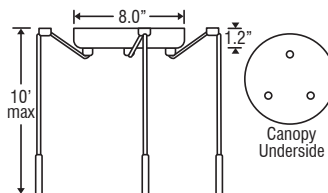

6JC: 6 Light Round

- 6x stemhooks included

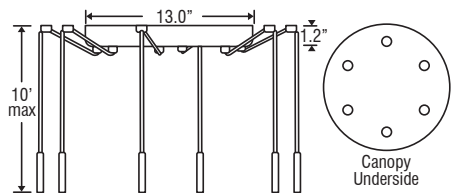

ORDERING:

Canopy Style	Opt.	Glass Decor	Metal Finish
1JC 1 Lt Dome	X GU24	491307 Opal Ribbed	BR Bronze
1JT 1 Lt Flat	max 27W*		SN Satin Nickel
3JB 3 Lt Linear			
3JC 3 Lt Round			
3JV 3 Lt Bar			
6JC 6 Lt Round			

1 Lt Dome Std CFL
1JF 18W TBX

METAL & CORD FINISHES:



Project Information:

Standard lamping is incandescent.

- To order with self-ballasted GU-24 CFL lampholders, add the option code where indicated.
- For 1 Lt. pendant with 4-pin CFL and non-dimming ballast in the dome canopy, order using a CFL canopy style as indicated.

*26W or 27W lamps may be provided