

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LAMPING

Standard is 60W A19 incandescent, with optional compact fluorescent configurations.

CONSTRUCTION

Glass is secured by three set screws. Stamped aluminum fitter is powder coated white.

DIFFUSER

Blown glass diffuser is available in Opal Ribbed decor.

LABELS

UL listed. Suitable for Damp Locations. Interior or Exterior Use. (Locations protected from direct precipitation)



ORDERING:

9 4 5 0 0 7 C - ■ ■ ■

Fixture/Decor Style (Lamping Option)

945007	Opal Ribbed	(blank)	Incandescent
A2			2x 9W Quad Mag 120V
B2			2x 13W Quad Mag 120V
D2			2x 13W Quad 120V
E1			1x 18W Quad 120V
F1			1x 18W TBX 120V
I1			1x 26W TBX 120V
K1			1x 32W TBX 120V
M2			2x 13W Quad 277V
N1			1x 18W Quad 277V
O1			1x 18W TBX 277V
R1			1x 26W TBX 277V
T1			1x 32W TBX 277V

9 4 5 1 0 7 C - ■ ■ ■


Fixture/Decor Style (Lamping Option)

945107	Opal Ribbed	(blank)	Incandescent
A1			1x 9W Quad Mag 120V
B1			1x 13W Quad Mag 120V
D1			1x 13W Quad 120V
M1			1x 13W Quad 277V

Project Information:


945007C:

2x 60W A19 (or CFL options)

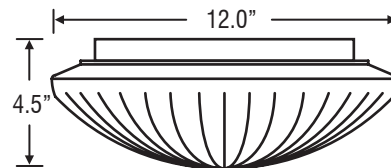

945107C:

1x 60W A19 (or CFL options)

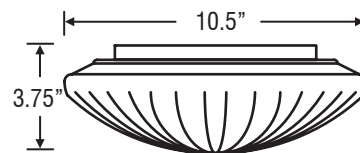

07
Opal Ribbed

Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 10/08