

SPECIFICATIONS:

DESCRIPTION

Wall-mounted ADA-compliant sconce featuring handcrafted glass.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lampping. Top of glass is approximately 2.875" above the outlet box centerline.

LAMPING

Standard lampping shall be 75W max A19. Energy-efficient compact fluorescent options include standard non-dimmable with electronic ballasts or self-ballasted GU-24 types. (Lamps not included)

Consult factory for other configurations.

CONSTRUCTION

Glass is secured to the backplate by braided wire. Rectangular backplate (nominal 6.55" W x 4.1" H) shall be constructed of steel, powder-coated white.

DIFFUSER


Diffuser shall be glass, in various decor options.

LABELS

UL listed. Suitable for Damp Locations (interior use only).



703007

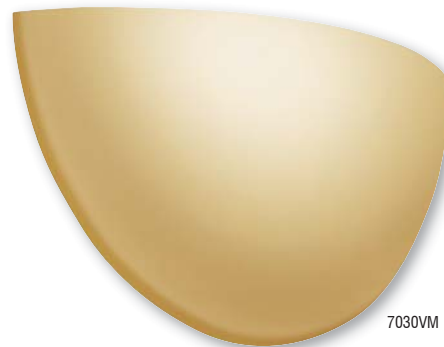


7030VM

ORDERING:

Fixture/Decor Style	(Lamping Option)
703007 Opal Matte	(blank) Incandescent
703018 Amber Cloud	E1 1x 18W Quad 120V
703019 Carrera	N1 1x 18W Quad 277V
703054 Zebra	W1 1x 18W GU-24 120V
7030GM Armagnac Matte	
7030HB Habanero	
7030MA Magma	
7030VM Vanilla Matte	

7030:

1x 75W A19 or CFL Options

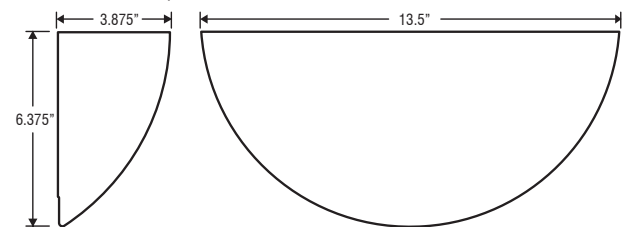

Note: No visible hardware, open-top design

Project Information:



Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 12/08