

SPECIFICATIONS:

DESCRIPTION

Wall-mounted ADA-compliant sconces featuring handcrafted glass.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered to the glass. 75°C supply wire required for incandescent lamping. Top of glass is approximately 11.375" above the outlet box centerline.

LAMPING

Standard lamping shall be 2x 100W A19. Energy-efficient compact fluorescent options include standard non-dimmable with electronic ballasts or self-ballasted GU-24 types. (Lamps not included)

Consult factory for other configurations (including TBX-type or Twin T5-type lamps)

CONSTRUCTION

Glass is secured to the backplate by decorative thumbscrews. Backplate (nominal 4" W x 17.25" H) is constructed of steel, powder-coated white.

DIFFUSER

Diffuser shall be glass, in various decor options.

METAL FINISH

Decorative metal accents shall be in various finish options.

LABELS


UL listed. Suitable for Damp Locations (interior use only).



7112VM-SN


ORDERING:

Fixture/Decor	(Lamping Option)	Metal Finish
711207 Opal Matte	(blank) Incandescent	BK Black
7112VM Vanilla Matte	H2 2x 26W Quad 120V	BR Bronze
	Q2 2x 26W Quad 277V	CR Chrome
	X2 2x 27W GU-24 120V	SN Satin Nickel
		WH White



7112:

2x 100W A19 or CFL Options

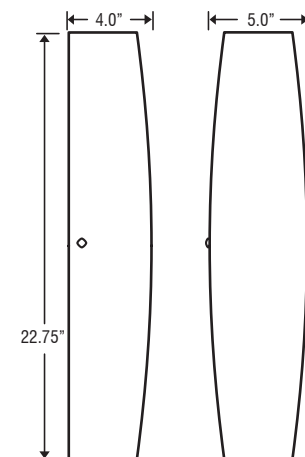

Project Information:

Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 12/08