



SPECIFICATIONS:

DESCRIPTION

Cable-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

Standard: 150W A21 120V incandescent, suitable for dimming, *not included.*

CFL: 26W 4-Pin CFL with non-dimming electronic ballast. 120V, *lamp not included.*

GU24 CFL: Self-ballasted GU24 lampholders. 26W max, 120V, *lamp not included.*

LED: 10W GU24 LED Lamp 120V, dimmable, *included.*

DIFFUSER

Shade shall be handcrafted glass of Opal Matte decor.

Diameter of 14.5" and height of 11.375"

Opening sizes: 44mm.

SUSPENSION

Cable-hung: 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths), 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only). Consult factory concerning lower wattage labeling for energy requirements.

location:
DAMP
interior

CFL GU24 LED



477507
Opal Matte

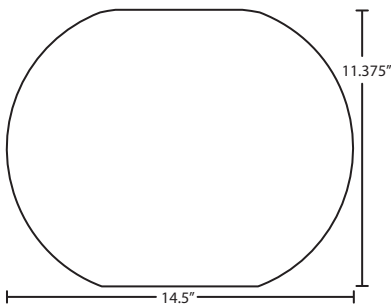

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.




ORDERING:

Connection*	Decor	Lamp Options	Metal Finish	Options
Cable Fixture 1KX 1 Lt. Dome	477507 Opal Matte	(blank) 150W A21 Incan H1 26W Quad 120V Q1 26W Quad 277V	BR Bronze SN Satin Nickel	L 15' cord
Stem Fixture 1TT 1 Lt. Flat		GU24 26W GU24 120V LED 10W LED 120V		


PENDANT OPTIONS:

CABLE-HUNG PENDANT



- 1x 10' aircraft-quality stainless steel cable
- Suitable for sloped ceilings
- 1x lampholder
- 4-pin CFL options available
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel

LED 120V PENDANTS:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 820 lumens
- CCT: 2700° Kelvin
- CRI: 82
- 3 year warranty

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

- T20A-SN** or **T20A-BR** Adj. Section
- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section

Project Information:

Empty box for project information.