

## ADDENDUM TO THE FIXTURE INSTRUCTION SHEET

## FOR CAP NUT LOCK UP FIXTURES

DUE TO RECENT CHANGES IN UL AND C-UL STANDARDS, THIS FIXTURE NOW REQUIRES AN ADDITIONAL MOUNTING SYSTEM CONSISTING OF A SAFETY CABLE.

**WARNING: BE SURE OUTLET BOX IS SECURED TO THE BUILDING STRUCTURE, SO IT IS ABLE TO SAFELY SUPPORT THE WEIGHT OF THE FIXTURE.**

1. On nipple, thread (in the following order) nut, large washer, lock washer, and the end washer from safety cable. Secure with nut.
2. Mount nipple to mounting bar.
3. Through the safety screw, insert washer and safety cable.
4. Secure safety screw (supplied) to the wood building structure. If your building structure is made of other material (i.e. metal, concrete, etc) select an appropriate method for your application (not supplied).
5. Proceed with fixture instruction sheet supplied with your fixture.

### FOR CENTER LOCK UP FIXTURES

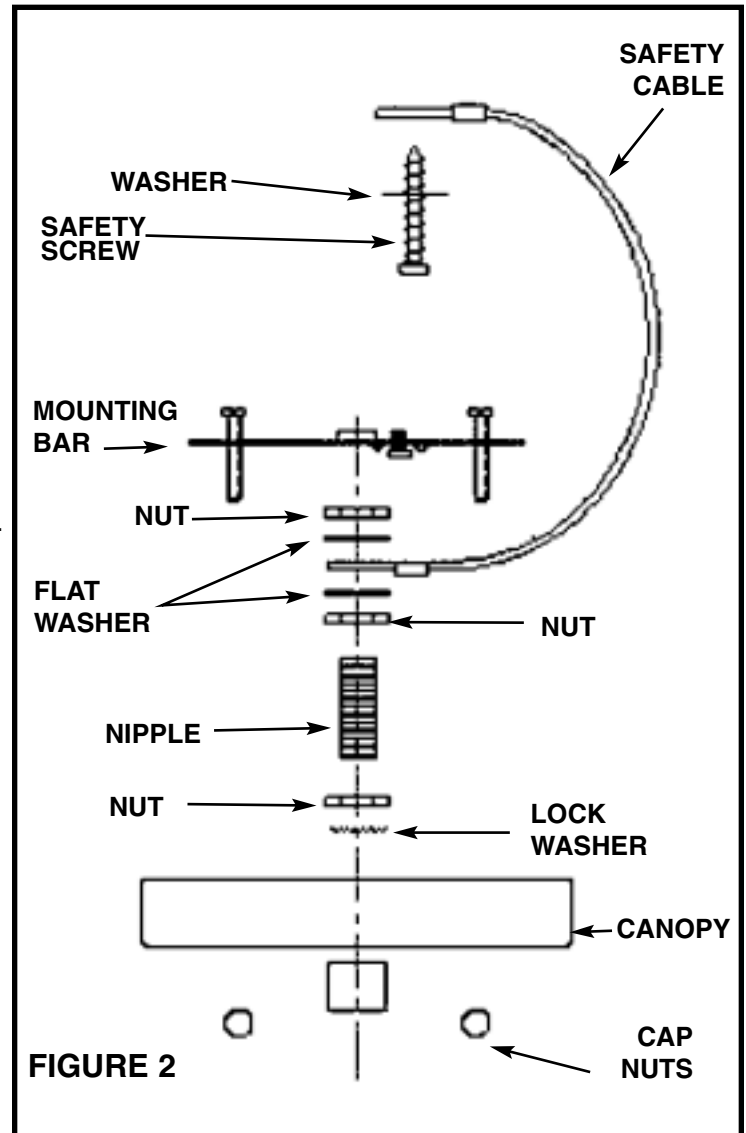
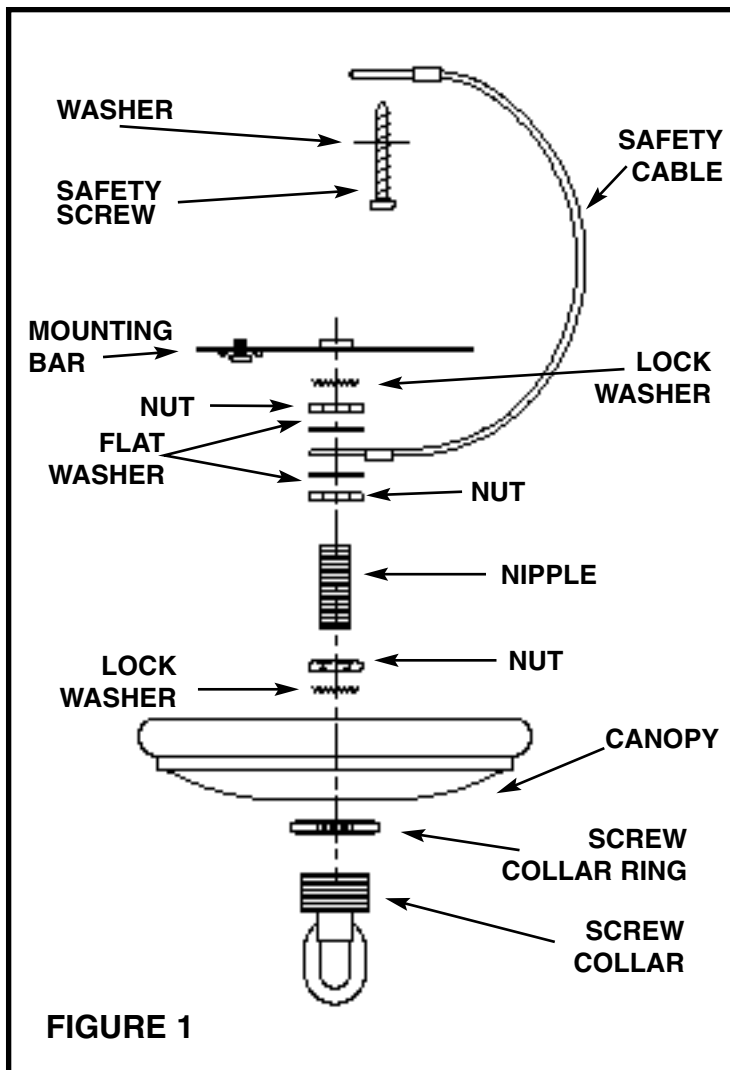


FIGURE 2

**sea gull lighting®**

## Installation And Safety Instruction

### A-765L 072704

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture.

Fill In Item Number On Carton And File This Sheet For Fixture Reference. ITEM# \_\_\_\_\_