

## IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- Use of other manufacturers components will void warranty, listing and create a potential safety hazard.
- If you are unclear as to how to proceed, contact a qualified electrician.
- You don't need special tools to install this fixture.
- Be sure to follow the steps in the order given.
- Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling which contains a radiant type heating system.
- Read instructions carefully.
- Proper wiring is essential for the safe operation of this fixture.
- To reduce the risk of electrical shock, provide a watertight seal between the fixture and the mounting surface by using a silicone or similar caulking.
- Save these instructions.

## BEFORE YOU BEGIN

Carefully remove the fixture from the carton and check that all parts are included, as shown in figure 1. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

**NOTE: THIS GLASS IS HANDCRAFTED, THE SLIGHT IMPERFECTIONS IN THE GLASS ADD TO THE AUTHENTICITY OF THE FIXTURE.**

## CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

## ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. Parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

## INSTALLATION


**IMPORTANT: DO NOT ATTACH FIXTURE DIRECTLY TO OUTLET BOX.**

### STEP 1:

Insert fixture mounting screws (A) in threaded holes of cross mounting bar (B). Run fixture mounting screws (A) all the way down to the heads.

### STEP 2:

Place cross mounting bar (B) against outlet box (not supplied) and fasten cross mounting bar (B), to outlet box with outlet box screws (not supplied). Be sure the mounting screws (A) are perfectly horizontal so fixture hangs straight.

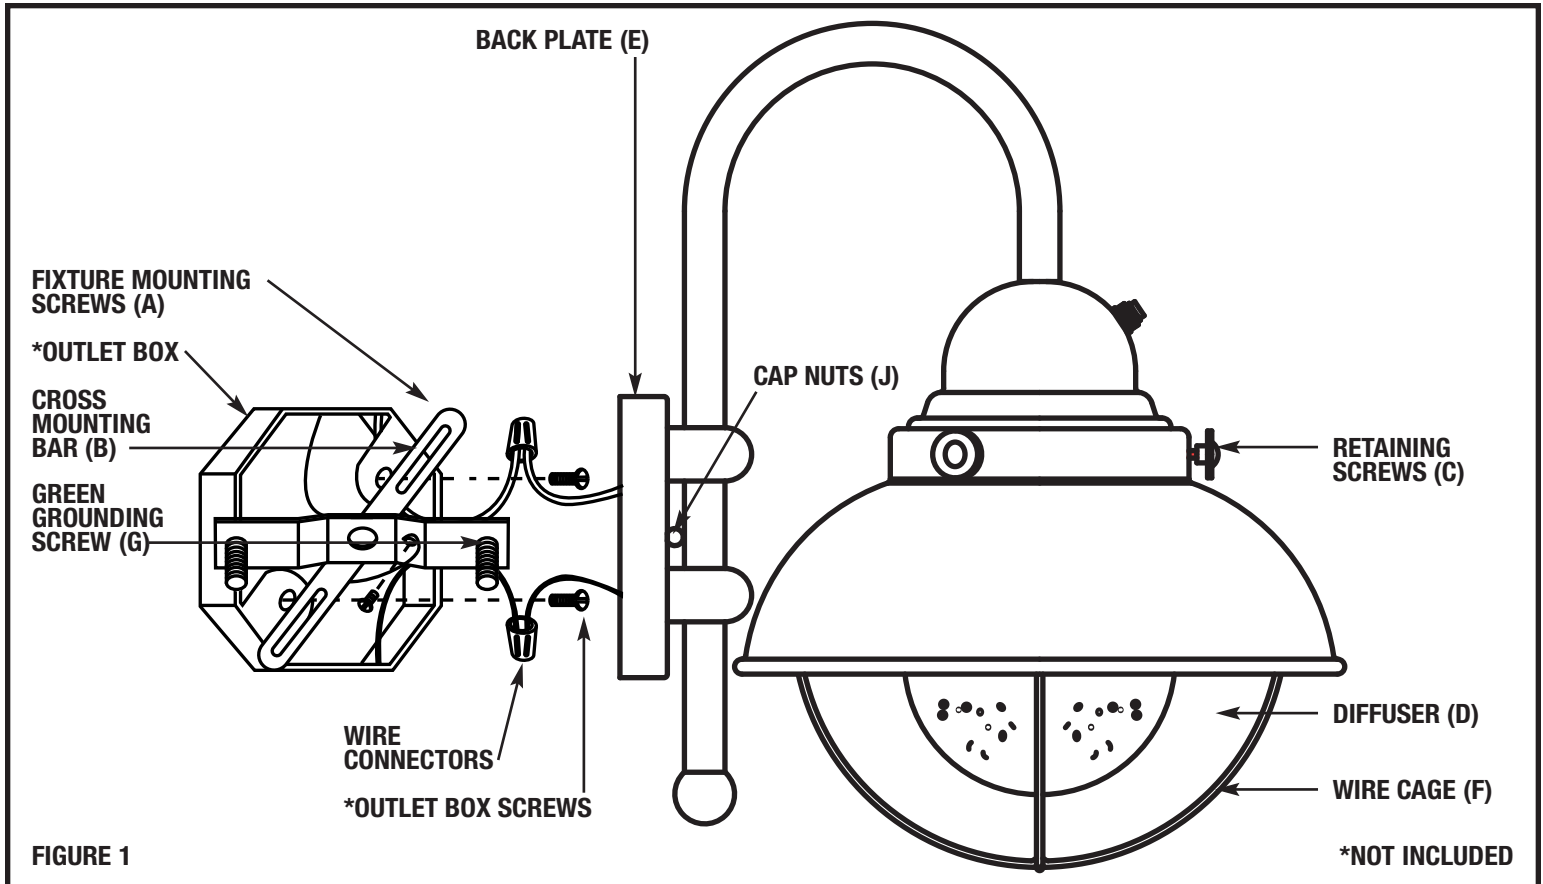

**STEP 3:**

- A. Use a listed wire connector to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
- B. Use a listed wire connector to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
- C. Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.

**STEP 4:**

**GROUNDING INSTRUCTIONS:** The green grounding screw (G) should be inserted into the hole with two raised dimples provided on the cross mounting bar (B). Wrap the ground wire from the fixture and the ground wire from the outlet box (bare metal or green insulated wire) around the green grounding screw (G). Tighten the green grounding screw (G) to make ground connection. **NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.**

Make sure no bare wires can be seen outside wire connectors.

**STEP 5:**

After wires are connected, tuck them carefully inside outlet box.

**STEP 6:**

Position backplate (E) over fixture mounting screws (A). Secure in place by threading cap nuts (J) onto fixture mounting screws (A).

**STEP 7:**

Install self ballasted lamp (I) by gently twisting into socket (H).

**STEP 8:**

Thread diffuser retaining screws (C) into holes at top of fixture. Raise diffuser (B), and finger tighten retaining screws (C). Over tightening retaining screws (C) may cause diffuser (B) to break.

**STEP 9:**

Snap on wire cage (E).

**FIXTURES WITH A ONE PIECE LAMP / BALLAST COMBINATION**

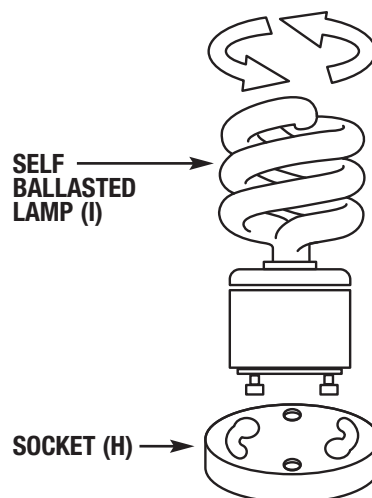


FIGURE 2