


# ASSEMBLY INSTRUCTIONS FOR F1883/6

(E) 04/04

①	②	③	④	⑤	⑥	⑦
6 Pcs.	18 Pcs.	12 Pcs.	6 Pcs.	1 Pcs.	28 Pcs.	1 Pcs.

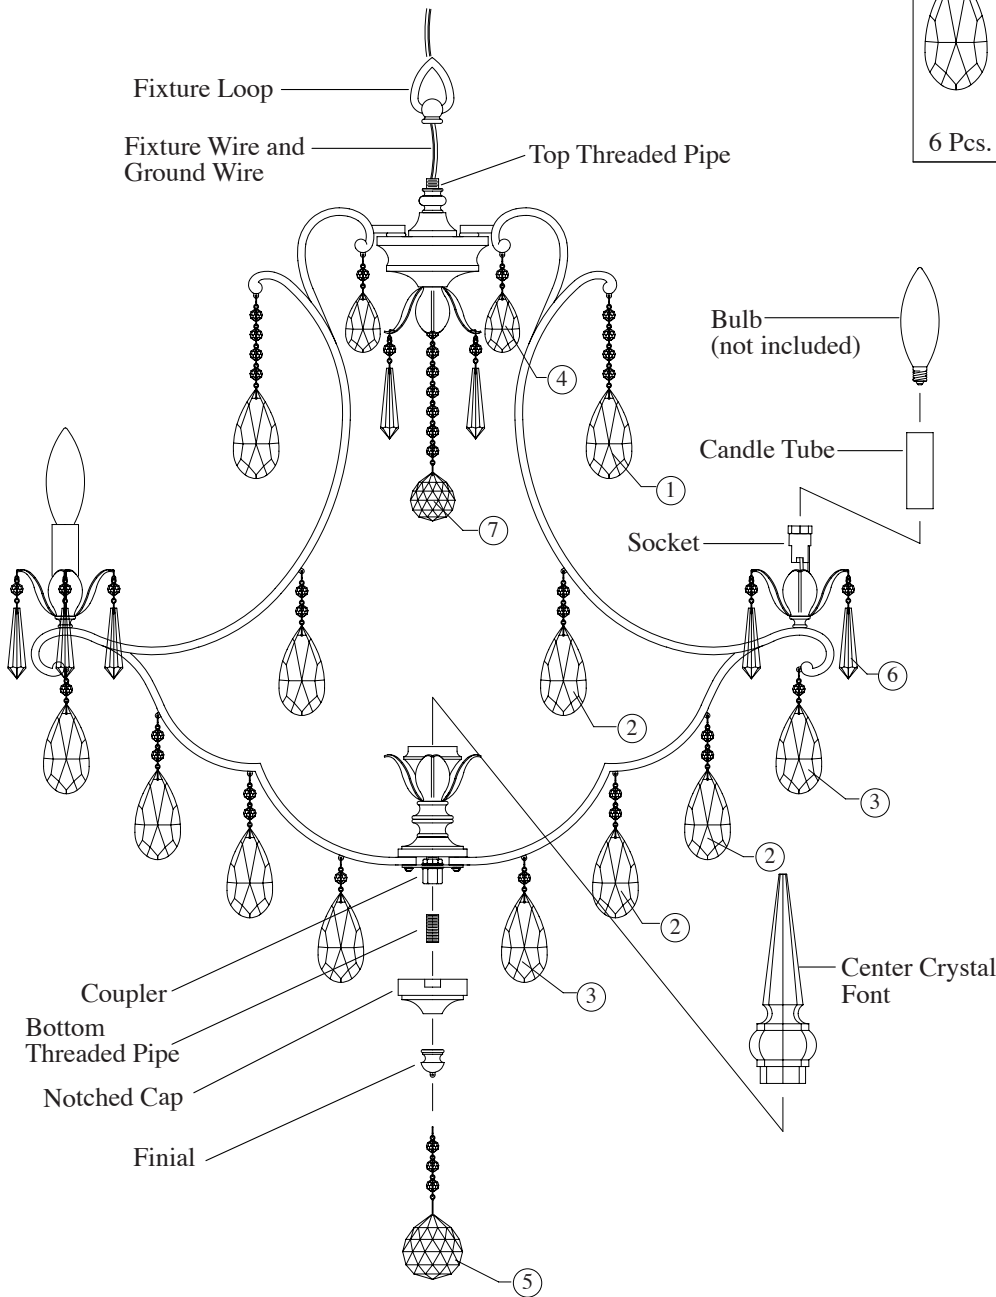

**IMPORTANT**  
**TURN OFF THE POWER AT THE MAIN FUSE**  
**OR CIRCUIT BREAKER BOX**  
**BEFORE STARTING INSTALLATION**

**Carefully unpack and identify all parts before assembly. Bulbs are not included.**

- Carefully thread fixture wire and ground wire through fixture loop. Screw fixture loop onto top threaded pipe until secure.
- Screw bottom threaded pipe into coupler. Slide notched cap over bottom threaded pipe and lock arms into its notches. Lock notched cap into position by fastening finial onto bottom threaded pipe.
- Place candle tubes over candelabra sockets and screw bulbs (not included) into sockets to secure. See relamping label on candle tube for type and maximum allowed wattage.
- Follow enclosed “**Chain Suspended Fixture Installation Instructions**” for electrical and fixture installation onto ceiling outlet box.
- Hang all crystal glass parts as shown on drawing. **NOTE:** To replace broken crystals extras are included in hardware bag. Replace by gently bending open pins, remove broken crystal, hook new one, then close back pins. Avoid bending pins into sharp angle.