

Assembly Instructions For

F2543/3 (E) 11/09

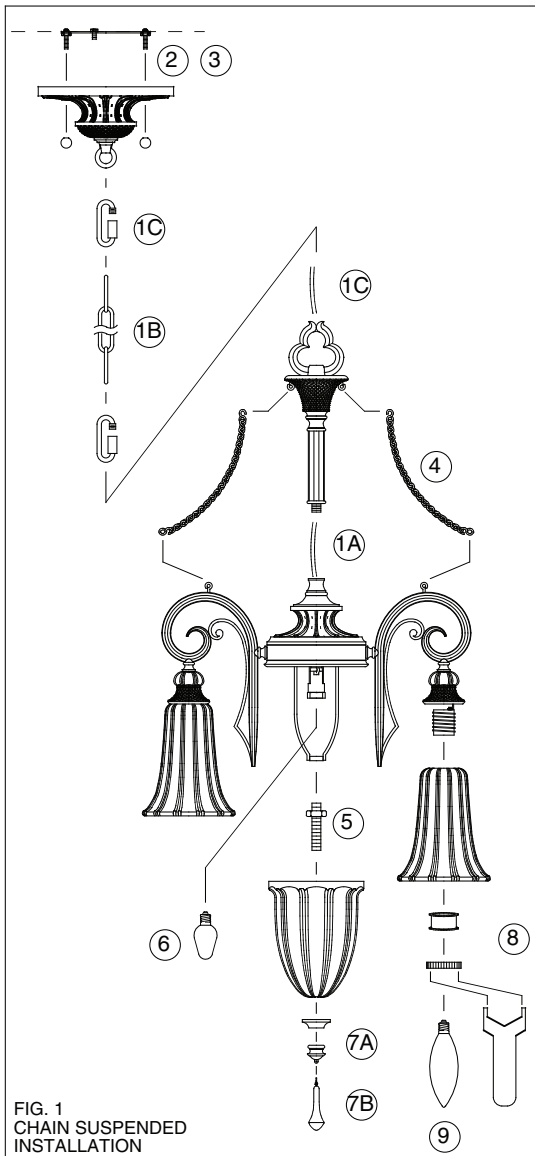


FIG. 1
CHAIN SUSPENDED
INSTALLATION

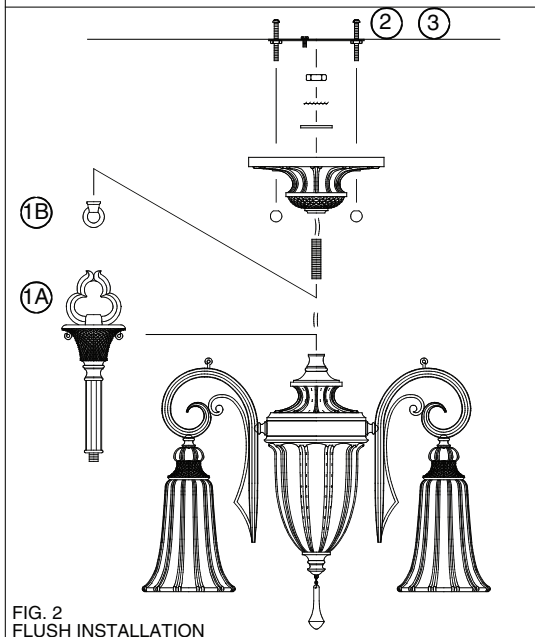


FIG. 2
FLUSH INSTALLATION

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.


1. This fixture can be mounted onto ceiling either as chain hung or flush mount:

CHAIN HUNG INSTALLATION- Fig. 1:

- A. Pass fixture wires through upper column. Then install upper column by screwing on top of fixture.
- B. At this point, determine the desired length of chain to hang. Remove any unwanted links with chain pliers.
- C. This fixture is supplied with two adjustable chain links. These links are opened and closed by twisting cylinder. One adjustable chain link should be installed onto loop on top of column and the other should be installed onto canopy loop. The standard chain should be installed in between these two adjustable chain links.
- D. Take ground wire (without plastic insulation) and weave through above chain links, then thread through center hole in canopy loop. Repeat with fixture wires (with plastic insulation).

FLUSH INSTALLATION- Fig. 2:

- A. Remove and discard upper column.
 - B. Remove and discard canopy loop.
 - C. Thread fixture wires through threaded pipe, then screw threaded pipe into top of fixture.
 - D. Thread fixture wires through canopy, flat washer, lock washer, and hex nut. Lock all together on top of fixture by tightening hex nut onto protruding threaded pipe.
2. Cut excess wires leaving only 6" (15 cm) length of wires above canopy. Split fixture wire into two strands. Then strip off 3/4" (19 mm) of outer plastic insulation.
 3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
 4. Hook decorative chains first onto the column and then proceed to hook onto arms.
 5. Install threaded pipe onto bottom of harp. At this point test install larger center shade and cover to make certain about 1/4" (5mm) of thread protrude out. If not then adjust the threaded pipe length accordingly. Secure by tightening hex nut.
 6. Install type-C7 of 10 Watt maximum candelabra base bulb (not included).
NOTE: Do not install bulb exceeding 10 Watt.
 7. A. Install center shade and cover onto bottom of fixture by securing with finial.
B. Install hanging drop by hooking onto finial.
 8. Install side shade onto fitters by fastening with spacer tube and counter ring. Use supplied wrench to tighten counter ring.
 9. Install type-B, candelabra base, of 60 Watt maximum bulbs (not included) onto sockets.



**MURRAY
FEISS**

GENERATION
BRANDS™