


# Assembly Instructions For F2530/6 (E) 11/09

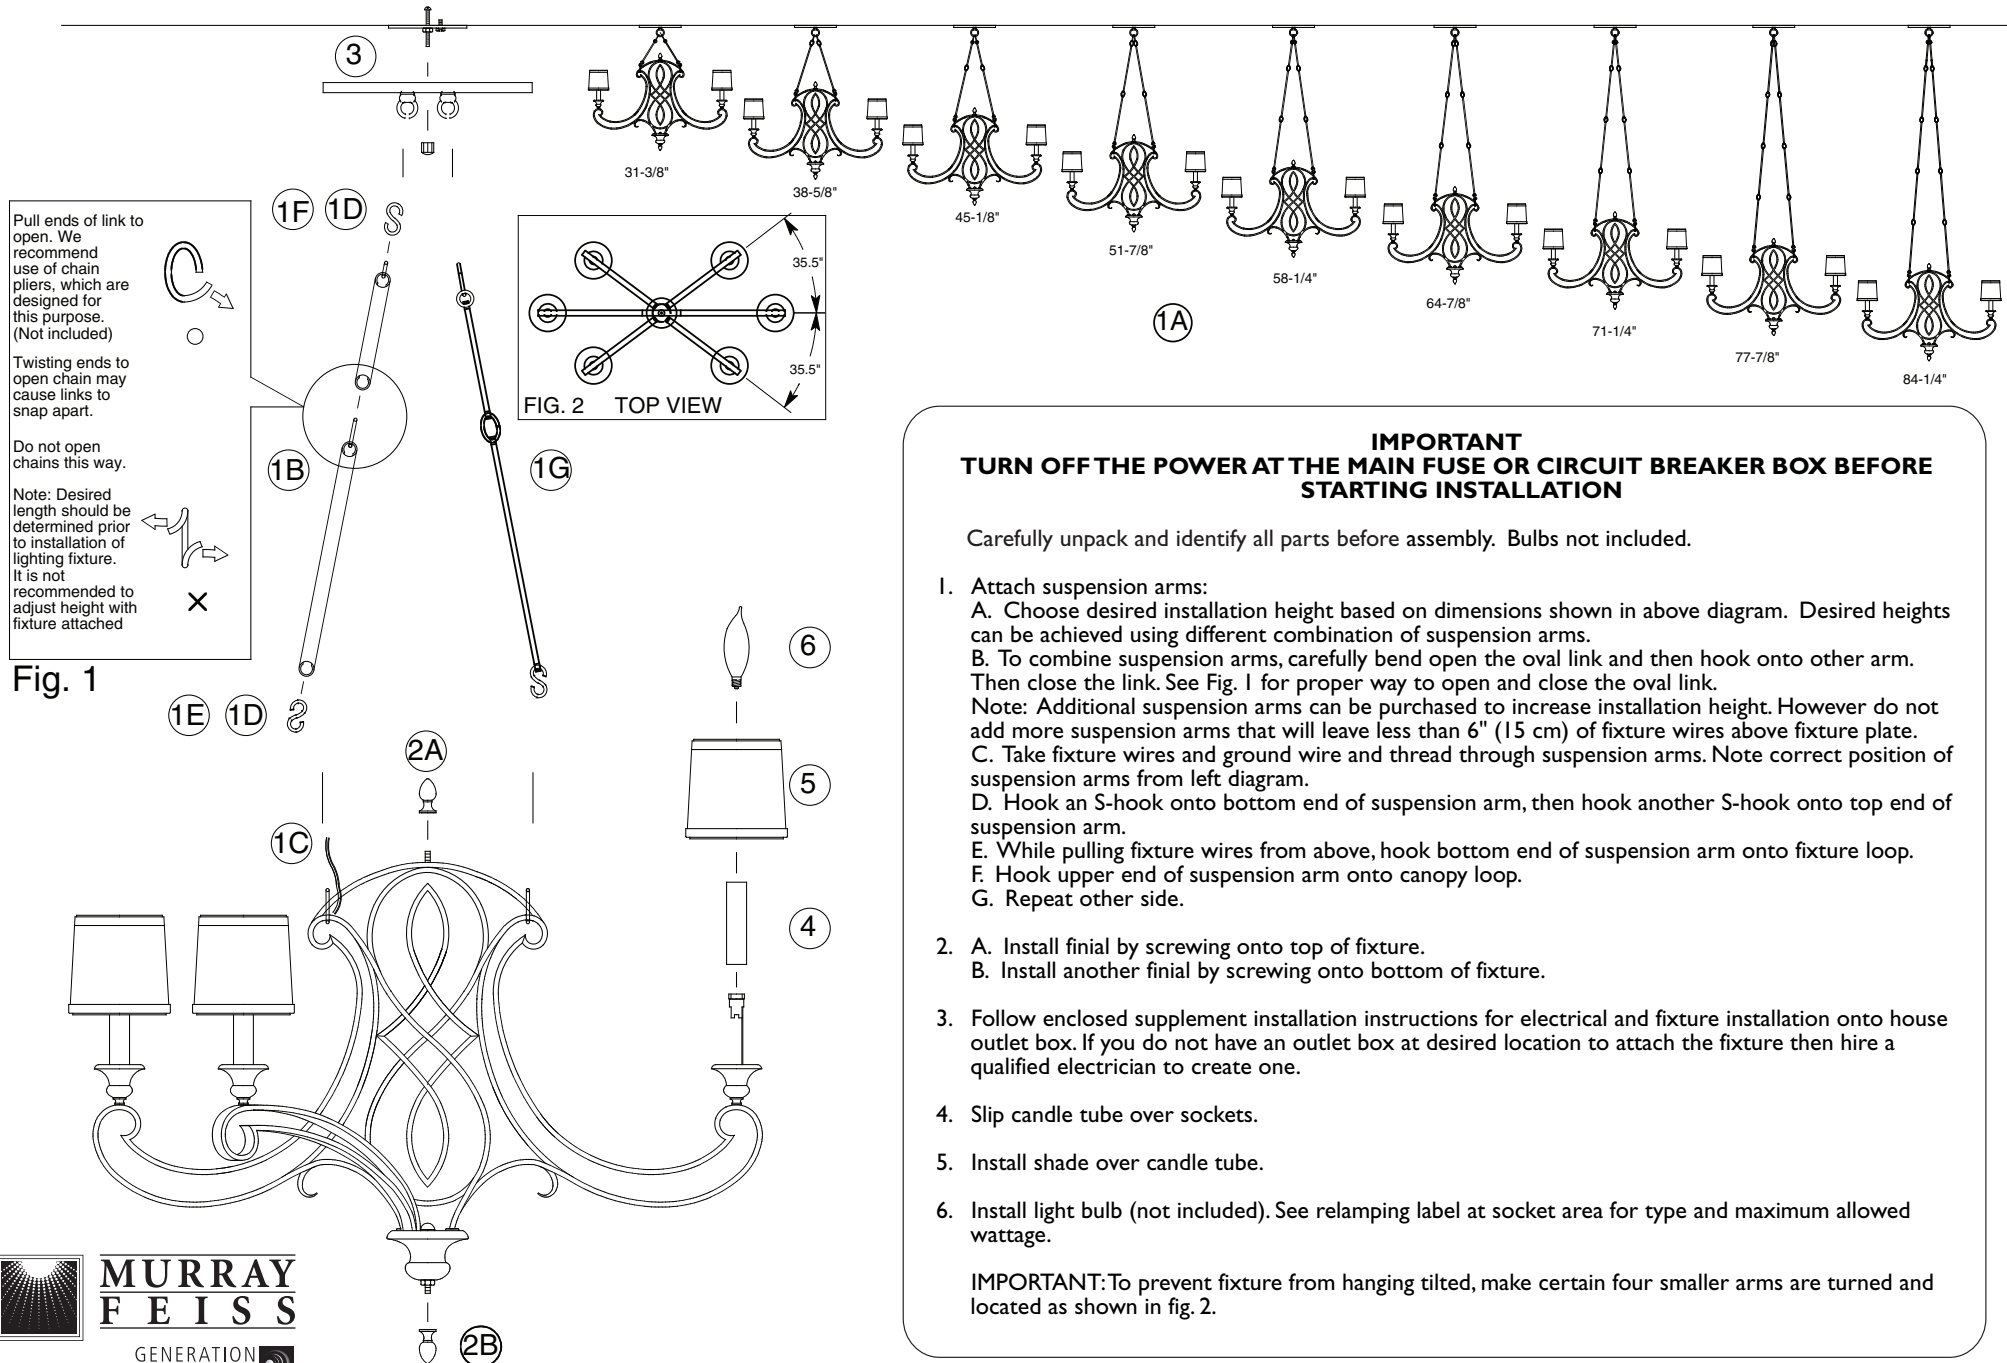

Pull ends of link to open. We recommend use of chain pliers, which are designed for this purpose. (Not included)

Twisting ends to open chain may cause links to snap apart.

Do not open chains this way.

Note: Desired length should be determined prior to installation of lighting fixture. It is not recommended to adjust height with fixture attached

Fig. 1

## IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Attach suspension arms:
  - A. Choose desired installation height based on dimensions shown in above diagram. Desired heights can be achieved using different combination of suspension arms.
  - B. To combine suspension arms, carefully bend open the oval link and then hook onto other arm. Then close the link. See Fig. 1 for proper way to open and close the oval link.

Note: Additional suspension arms can be purchased to increase installation height. However do not add more suspension arms that will leave less than 6" (15 cm) of fixture wires above fixture plate.

  - C. Take fixture wires and ground wire and thread through suspension arms. Note correct position of suspension arms from left diagram.
  - D. Hook an S-hook onto bottom end of suspension arm, then hook another S-hook onto top end of suspension arm.
  - E. While pulling fixture wires from above, hook bottom end of suspension arm onto fixture loop.
  - F. Hook upper end of suspension arm onto canopy loop.
  - G. Repeat other side.
2. A. Install finial by screwing onto top of fixture.  
B. Install another finial by screwing onto bottom of fixture.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
4. Slip candle tube over sockets.
5. Install shade over candle tube.
6. Install light bulb (not included). See relamping label at socket area for type and maximum allowed wattage.

IMPORTANT: To prevent fixture from hanging tilted, make certain four smaller arms are turned and located as shown in fig. 2.