

FIG.1

CHAIN HUNG
INSTALLATION


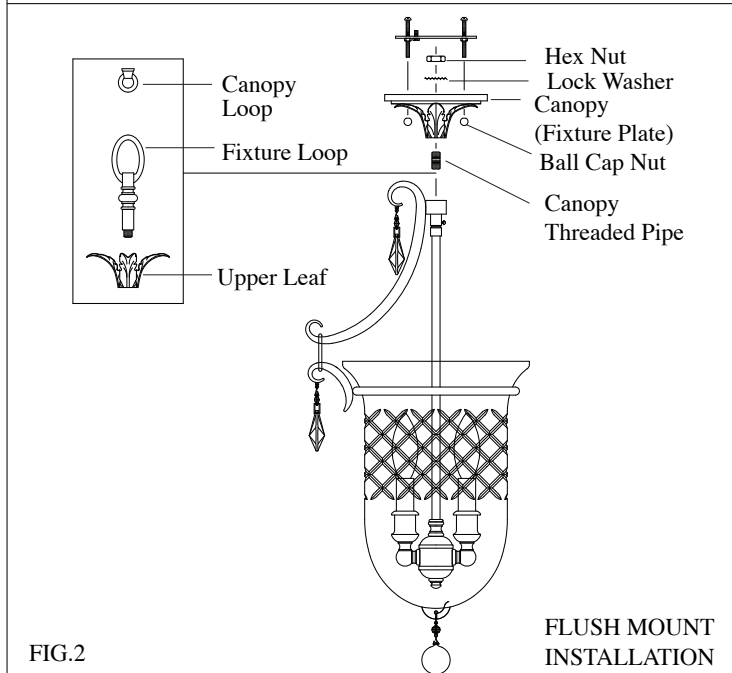


FIG.2

FLUSH MOUNT
INSTALLATION

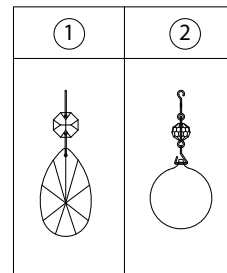

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE
OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs are not included.

1. Install center pipe by screwing socket assembly. Note correct position of center pipe from left diagram. Install top end of center pipe by screwing securely onto swivel.
2. This fixture can be mounted onto ceiling either as chain hung or flush mount:

CHAIN HUNG INSTALLATION- Fig. 1:

- A. Thread fixture wires through upper leaf and fixture loop. Then lock all together by fastening fixture loop.
- B. At this point, determine the desired length of chain to hang. Remove any unwanted links with chain pliers.
- C. This fixture is supplied with 2 adjustable chain links. These links are opened and closed by twisting cylinder on chain link. One adjustable chain link should be installed onto canopy loop. And another adjustable chain link installed onto the fixture loop. The standard chain should be installed in between these 2 adjustable chain links.
- D. Take ground wire and weave through above chain links, then thread through center hole in canopy loop. Repeat with fixture wire (wire with plastic insulation).

FLUSH INSTALLATION- Fig. 2:

- A. Remove and discard fixture loop and upper leaf.
 - B. Remove and discard canopy loop from canopy.
 - C. Take canopy threaded pipe and screw into top of fixture.
 - D. Thread fixture wires through canopy leaf, canopy, lock washer, and hex nut. Lock all together on top of fixture by tightening hex nut onto protruding threaded pipe.
3. Cut excess wires leaving only 6" (15 cm) length of wires above canopy. Split fixture wire into two strands. Then strip off 3/4" (19mm) of outer plastic insulation.
 4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
 5. Slip candle tube over sockets.
 6. Install bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
 7. Install shade:
 - A. Install ring by hooking onto bottom curl of each arms.
 - B. Slip shade over the frame.
 - C. Grabbing firmly onto the frame, lift and hook the frame onto the rings.
 8. Hang all crystal glass parts as shown on drawing. NOTE: To replace broken crystals extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal, hook new one, then close back pin. Avoid bending pin into sharp angle.