


Assembly Instructions For FM271, FM272, FM273 (E) 10/07

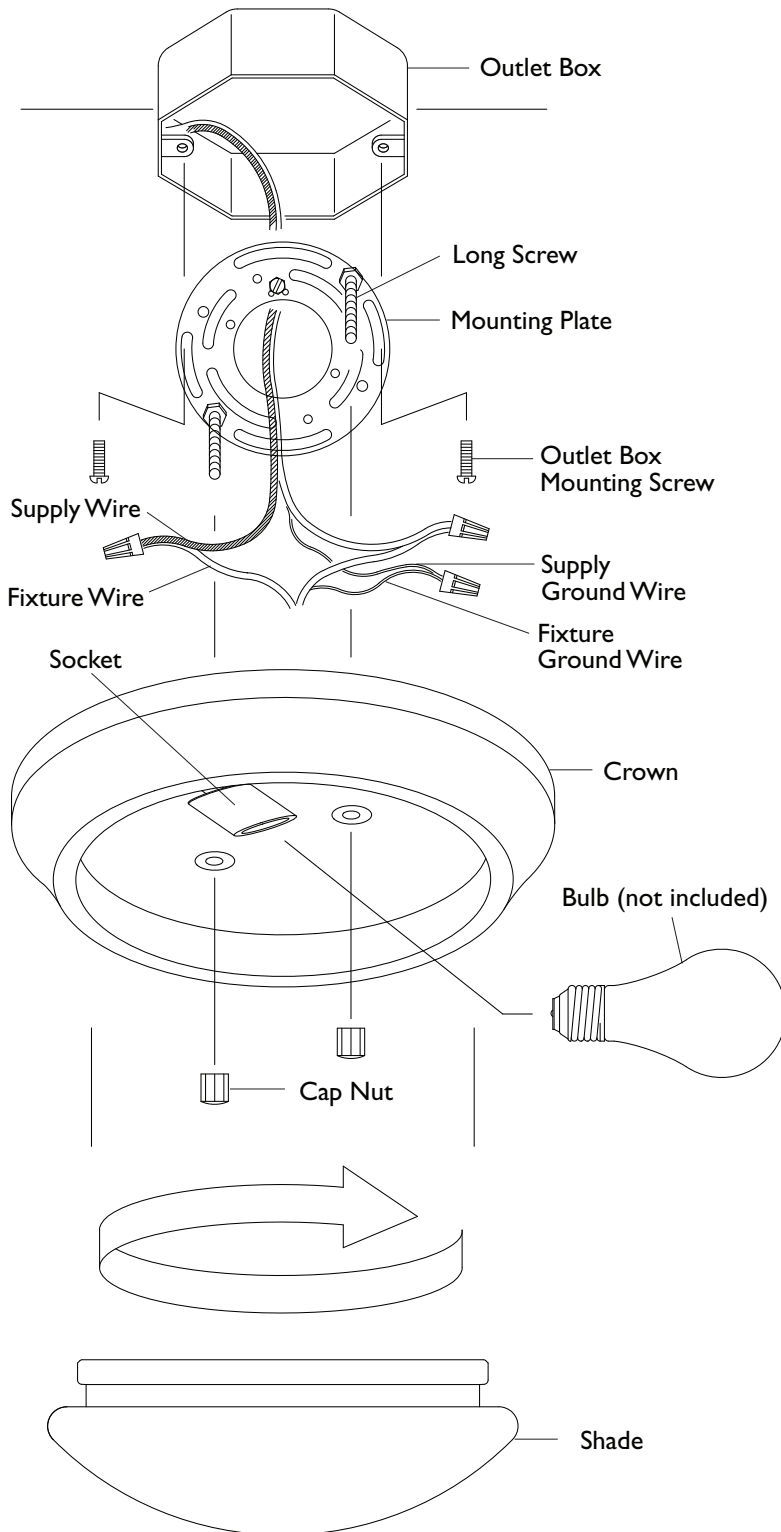

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. Mounting Plate installation:

- A. Install long screws onto mounting plate by screwing from opposite side of green grounding screw head. Make certain the two screws are installed at same distance as holes in crown.
- B. Leave about 3/4" (19 mm) of thread exposed then lock in place by fastening with hex nuts from opposite side.
- C. Pass electrical wires from outlet box through center hole in mounting plate.
- D. Fasten the mounting plate onto outlet box using two screws supplied with the outlet box.
- E. At this point, test install crown onto ceiling and make certain about 3/16" (5 mm) of screw threads are protruding below crown surface. If not, then adjust screw location by loosening hex nuts and screwing up or down accordingly.
- F. Once correct screw location has been adjusted, remove crown and tighten hex nuts. Make certain not to spin screws during tightening.
- G. Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.

2. Grounding Connection:


This fixture is provided with a ground wire. Connect fixture ground wire to ground wire from outlet box with wire connector (not provided).

Never connect ground wire to black or white power supply wires.

3. Electrical connections:

Connect the white wire(s) from the fixture to the white wire of the outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/ or have a silver conductor.

4. While gently tucking all wires inside, install crown onto the outlet box by fastening with cap nuts onto protruding screws.
5. Install bulb (not included). See relamping label located at socket area for type and maximum allowed wattage.
6. Install shade onto crown by turning in clockwise direction. IMPORTANT: MAKE CERTAIN SHADE IS FIRMLY LOCKED INTO CROWN.



**MURRAY
FEISS**

Generation Brands™