
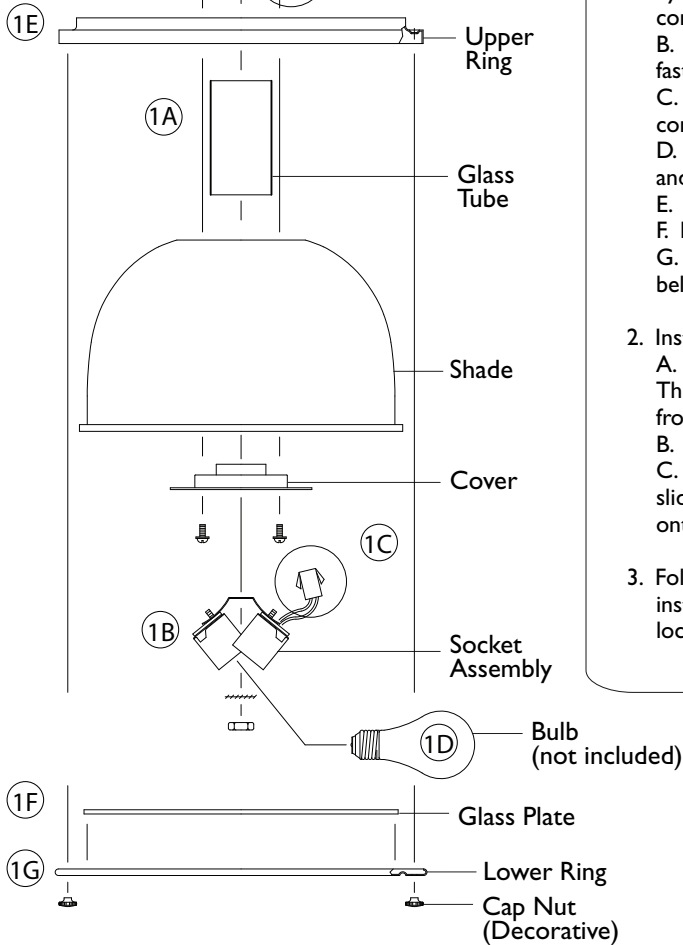

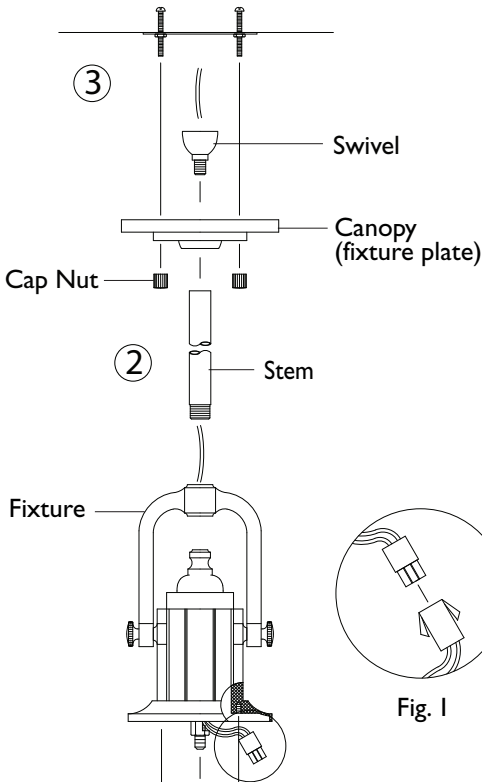


Assembly Instructions For


P1146 (E) 4/08

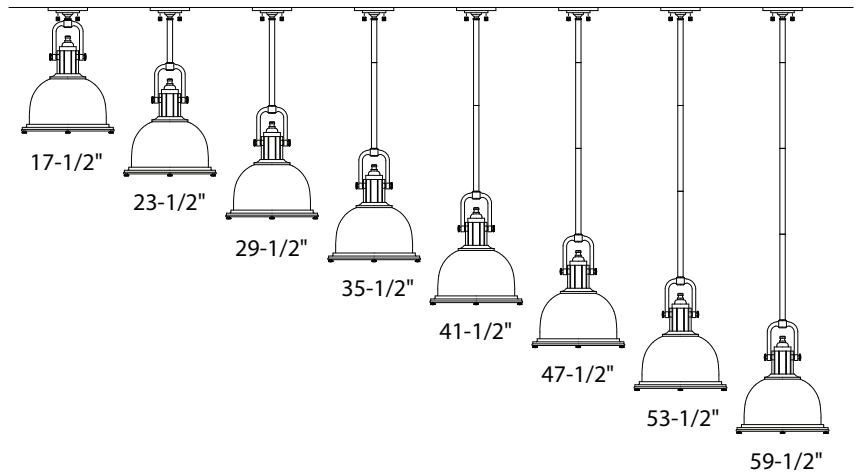

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

- Insert glass tube inside of fixture. Then install glass shade onto bottom of fixture by holding with cover and fastening with short screws. Note: Make certain wire connector protrude outside of cover before fastening screws.
 - Install socket assembly onto threaded pipe which protrude below the cover by fastening with a lock washer and hex nut.
 - Join the two wire connectors together. See fig. 1. Make certain they are securely connected.
 - Install bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.
 - Place upper ring onto bottom section of shade. See diagram for correct position.
 - Place glass plate inside of lower ring.
 - Lock upper ring onto lower ring by fastening with cap nut (decorative), from below.
- Install stems:
 - Choose desired installation height from dimensions shown in above diagram. Thread fixture wires through each stems to be used. Note correct position of stems from left diagram. Screw all stem together until secure.
 - Install bottom end of stem assembly by screwing into top of fixture.
 - Thread fixture wires through canopy and then swivel. Allow canopy to carefully slide down without scraping the surface of stems. Then install swivel by screwing onto top end of stem assembly.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.



**MURRAY
FEISS**
Generation Brands™