



Assembly Instructions For F2262/4, F2263/6, F2264/9 (E) 10/07

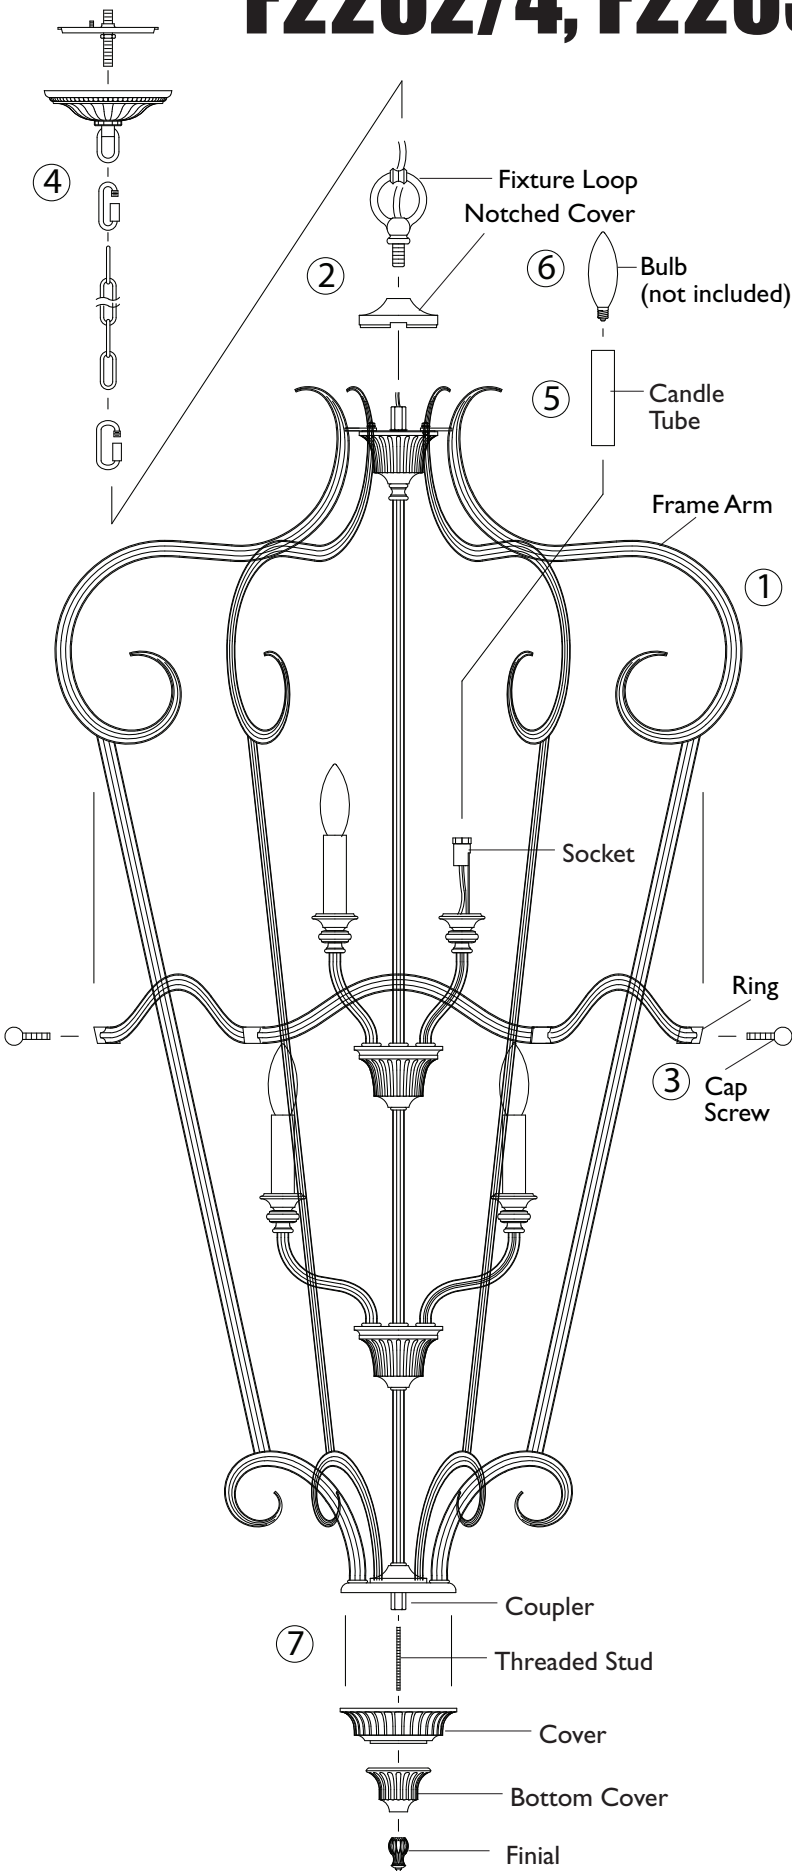

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. Spread open arms so they are evenly spaced to each other.
2. Thread fixture wires through upper notched cap and fixture loop. Then slide down the notched cap until the arms are locked into its notches. Screw fixture loop onto protruding threaded pipe until secure.
3. A. Insert ring onto frame from below. NOTE: The wavy crest of ring must be located at top as shown on left diagram.
B. While one person is firmly holding onto frame, making certain frame arms are evenly spaced apart from each other, have another person gently lift the ring until it aligns onto the six frame arms. NOTE: Be careful not to scratch paint finish.
C. Lock ring onto frame arms by fastening with ball cap screws.
4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
5. Install candle tube onto sockets.
6. Install light bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.
7. Install threaded stud by screwing into bottom coupler. Then slip cover and bottom cover through the installed stud. Secure all together by fastening with finial.



**MURRAY
FEISS**

Generation Brands™