


Assembly Instructions For

OL8213

(E) 12/11

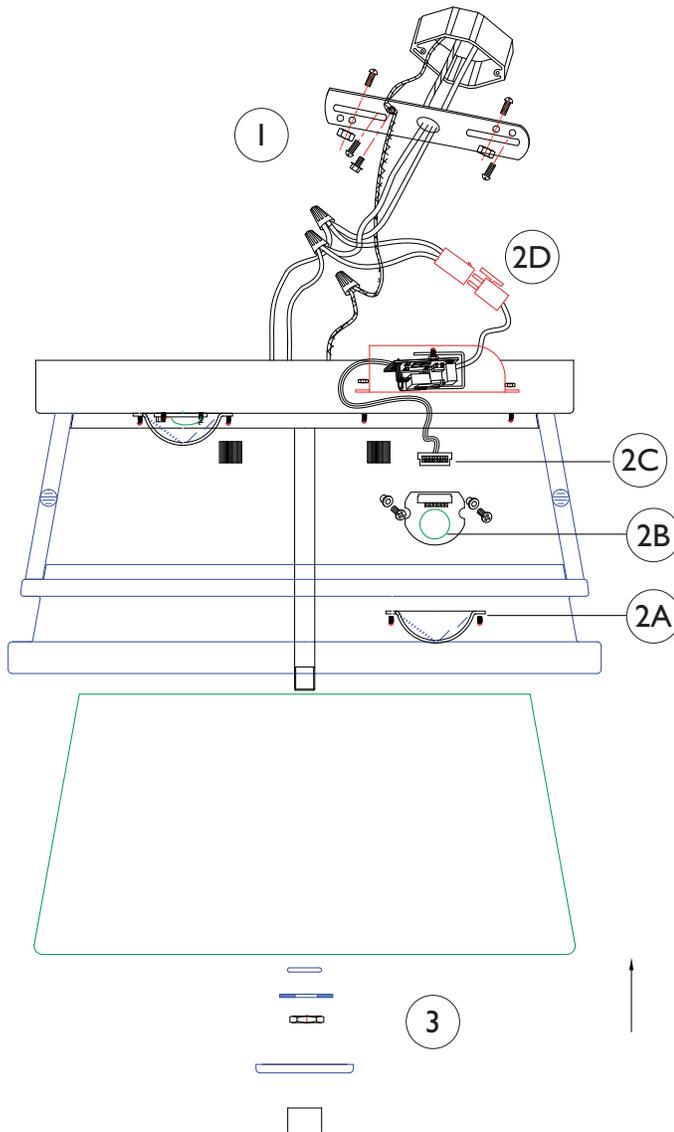

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.

1. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
2. LED bulb and driver replacement:
 - A. Unscrew the 3 screws for the lens and remove the lens.
 - B. Unscrew the 2 screws from the LED bulb housing and remove LED bulb.
 - C. Unplug the connection marked 2C and replace with a new LED bulb.
 - D. Unplug the connections marked 2C & 2D and replace with a new driver.
3. Slip glass shade through long threaded pipe until it checks inside of main frame and fasten with lock washer and hex nut. Then slip cover and lock into position by fastening with finial. Do not over tighten.

