

PARTS & ASSEMBLY SHEET

Fixture Name: Brookfield 5221-2 CH , ORB, PW and 5332 RBZ

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer			
Mounting Strap	1ea 	Threaded Rod (Nipple)	1ea 	Mounting Screw	2ea 
Spring Washer	1ea 	Hex Nut	1ea 	Deco Nut (round nut)	1ea 
Green Ground Screw	1ea 	Wire Connector	2ea 		
Part Needed _____				Quantity _____	
Part Needed _____				Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)				
Comments _____					

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.


1. Place the Glass Shade(K) over the Socket (M).
2. Holding the Glass Shade(K), place the Socket Ring(L) over the Threaded Socket(M).
3. Secure Glass Shade(K) by threading the Socket Ring(L) onto the Threaded Socket(M) until tight.
4. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

5221-2 and 5332 RBZ

Fig 1

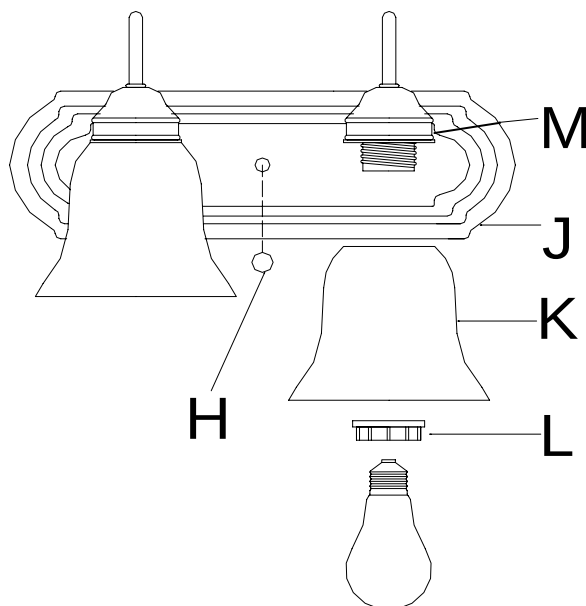

For Customer Service, contact the place of purchase to arrange for replacement parts.

Fixture Name: Brookfield 5221-2 CH , ORB, PW and 5332 RBZ

For Wall Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE(Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Thread the Nipple (D) into the Mounting Strap (A). Place Lock Washer (C) over end of Nipple (D) protruding through Mounting Strap (A) and thread Hex Nuts (B) onto Nipple until tight.
4. The Mounting Strap(A) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate(J) and thread the two Mounting Screws(E) half way into the Mounting Strap(A).
5. Place the Mounting Strap(A) over the Junction Box so the Mounting Screws(E) are vertical or horizontal, as required by fixture type and fasten using the two mounting screws (B). Tighten the screws (B) securely with screw driver.

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 7. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION(Fig.3)

9. Place the fixture Back Plate (J), over the threaded rod, so it protrudes through the hole in the Back Plate (J). Thread the Deco Nut (H) onto the threaded rod and continue turning until the Back Plate(J) is snug against the wall.
 10. Install the light bulbs and glass shade as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

JUNCTION BOX

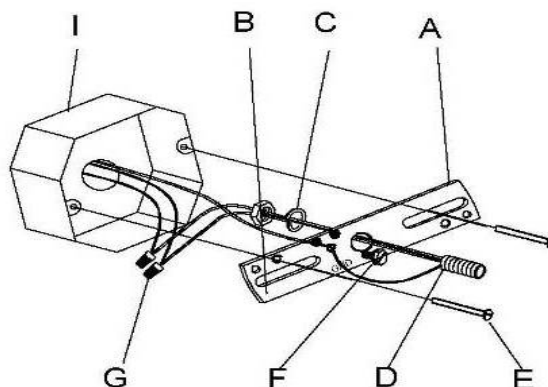


Fig. 2

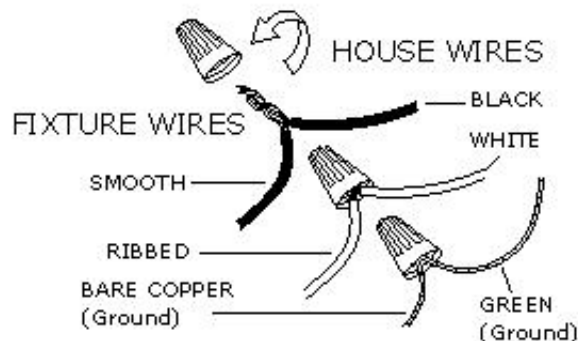


Fig. 3

